## 16Gb - LPDDR4 Synchronous DRAM



## 512M x 32 bit LPDDR4 Synchronous DRAM

### Overview

The LPDDR4 SDRAM is organized as 2 channels per device, and individual channel is 8-banks and 16-bits. This product uses a double-data-rate architecture to achieve high-speed operation. The double data rate architecture is essentially a 16n prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. This product offers fully synchronous operations referenced to both rising and falling edges of the clock. The data paths are internally pipelined and 16n bits prefetched to achieve very high bandwidth. This LPDDR4 device uses a 2 or 4 clocks architecture on the Command/Address (CA) bus to reduce the number of input pins in the system. The 6-bit CA bus contains command, address, and bank information. Each command uses 1, 2 or 4 clock cycle, during which command information is transferred on the positive edge of the clock.

#### **Features**

- JEDEC Standard Compliant
- AEC-Q100 Compliant
- Fast clock rate: 1866MHz
- Low-voltage Core and I/O Power supplies:
  - $-V_{DD1} = 1.8V (1.7V \sim 1.95V)$
  - V<sub>DD2</sub> = 1.1V (1.06V~1.17V)
  - $-V_{DDQ} = 1.1V (1.06V \sim 1.17V)$
- Operating temperature range:
  - Extended Test (ET): T<sub>C</sub> = -25~85°C
- Supports JEDEC clock jitter specification
- Configuration:
  - 512 Meg x 32 (2 channels x16 I/O)
- 8 internal banks per each channel
- 16n-bit prefetch architecture
- Single data rate (multiple cycles) CMD/ADR bus
- Bidirectional differential data strobe per byte of data
  - DQS & DQS#
- DMI pin support for write data masking and DBI functionality

- Programmable READ and WRITE latencies
- Programmable and on-the-fly burst lengths
- Directed per-bank refresh for concurrent bank operation and ease of command scheduling
- Selectable output drive strength (DS)
- Dynamic ODT
  - DQ ODT :VSSQ Termination
  - CA ODT :VSS Termination
- On-chip temperature sensor to control self refresh rate
- On-chip temperature sensor whose status can be read from MR4
- Interface: LVSTL
- Internal VREF and VREF Training
- ZQ Calibration
- RoHS compliant
- Package: Pb and Halogen Free
  - 200-ball 10 x 14.5 x 0.8mm FBGA

DISCLAIMER: All product, product specifications, and data are subject to change without notice to improve reliability, function or design, or otherwise. The information provided herein is correct to the best of Insignis Technology Corporation's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.

## **How to Order**


Function	Density	_	Pkg	Pkg Size	Speed &	Option	INSIGNIS PART
		Width	Type		Latency		NUMBER:
LPDDR4	16Gb	x32	FBGA	10x14.5 (x0.8)	3733Mbps/pin	Extended Test	NLQA3PFS-3NET

Visit: <a href="http://insignis-tech.com/how-to-buy">http://insignis-tech.com/how-to-buy</a>



## Package Block Diagram

Figure 1. Dual Channel Package Block Diagram (x32)

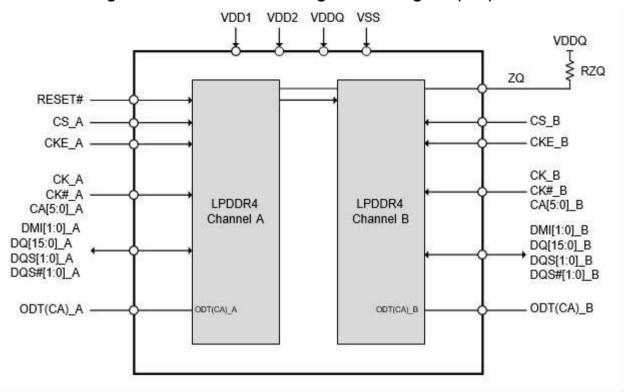



## Simplified LPDDR4 State Diagram

Figure 2. LPDDR4: Simplified Bus Interface State Diagram - Sheet 1


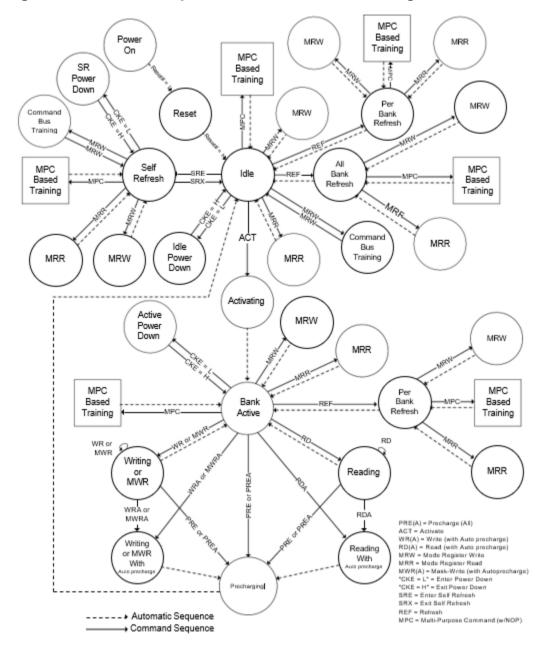




Figure 3. LPDDR4: Simplified Bus Interface State Diagram - Sheet 2

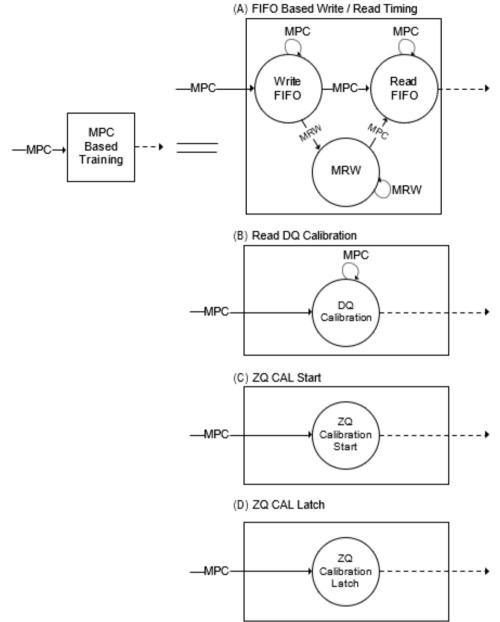


- 1. From the Self Refresh state the device can enter Power-Down, MRR, MRW, or MPC states. See the Self Refresh section for more information.
- in IDLE state, all banks are precharged.
   in the case of a MRW command to enter a training mode, the state machine will not automatically return to the IDLE state at the conclusion of training.
- See the Mode Register Write (MRW) section for more information.

  4. In the case of a MPC command to enter a training mode, the state machine may not automatically return to the IDLE state at the conclusion of training. See the Multi-Purcose Command (MPC) section for more information.
- This simplified State Diagram is Intended to provide an overview of the possible state transitions and the commands to control them. In particular, situations involving more than one bank, the enabling or disabling of on-die termination, and some other events are not captured in full detail.
   States that have an "automatic return" and can be accessed from more than one prior state (Ex. MRW from either idle or Active states) will return to the
- state from when they were initiated (Ex. MRW from idle will return to idle).
- state from which may were interest jet. In two well return to rate,

  The RESET pin can be asserted from any state, and will cause the SDRAM to go to the Reset State. The diagram shows RESET applied from the Power-On
  as an example, but the Diagram should not be construed as a restriction on RESET.



Figure 4. Ball Assignment (200-Ball x32 FBGA Top View)

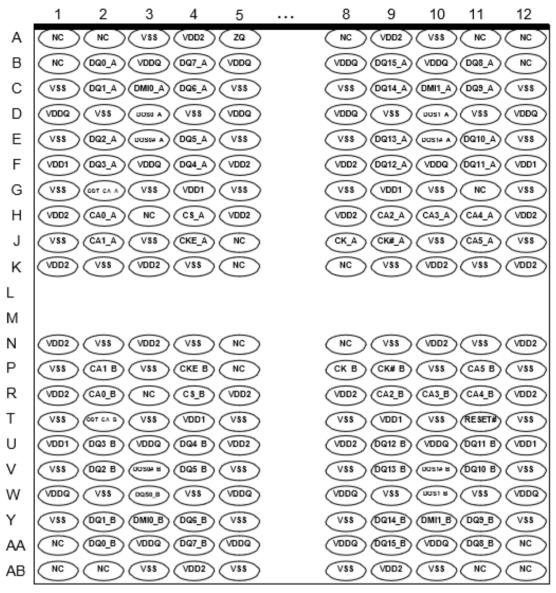

NOTE 1 0.8mm pitch (X-axis), 0.65mm pitch (Y-axis), 22 rows. NOTE 2 Top View, A1 in top left corner.

NOTE 3 ODT\_CA\_[x] balls are wired to ODT\_CA\_[x] pads of Rank 0 DRAM die. ODT\_CA\_[x] pads for other ranks (if present) are disabled in the package.

NOTE 4 Die pad VSS and VSSQ signals are combined to VSS package balls.

NOTE 5 Package requires dual channel die or functional equivalent of single channel die-stack.



# **Addressing**

**Table 1. LPDDR4 SDRAM Addressing** 

	Memory Density	512Mx32 (16Gb/Package)			
Organizati	on	x32			
Number of	f Channels	2			
Density pe	er channel	1			
Configurat	ion	8Gb			
Number of	f Banks (per Channel)	64Mb x 16DQ x 8 banks x 2 channel			
Array Pre-	Fetch (Bits, per channel)	8			
Number of	f Rows (per channel)	256			
Number of Columns (fetch boundaries)		65,536			
Page Size	(Bytes)	64			
Bank Addr	ess	2048			
10	Row Addresses	R0-R15			
x16	Column Addresses	C0-C9			
Burst Start	ting Address Boundary	64-bit			

Note 1. The lower two column addresses (C0 - C1) are assumed to be "zero" and are not transmitted on the CA bus.

Note 2. Row and Column address values on the CA bus that are not used for a particular density be at valid logic levels.

Note 3. For non - binary memory densities, only half of the row address space is valid. When the MSB address bit is "HIGH", then the MSB - 1 address bit must be "LOW".

# **Ball Descriptions**

**Table 2. Ball Details** 

Symbol	Туре	Description
CK_A, CK#_A, CK_B, CK#_B	Input	<b>Clock:</b> CK and CK# are differential clock inputs. All address, command, and control input signals are sampled on the crossing of the positive edge of CK and the negative edge of CK#. AC timings for CA parameters are referenced to CK. Each channel (A & B) has its own clock pair.
CKE_A, CKE_B	Input	Clock Enable: CKE HIGH activates and CKE LOW deactivates the internal clock circuits, input buffers, and output drivers. Power-saving modes are entered and exited via CKE transitions. CKE is part of the command code. Each channel (A & B) has its own CKE signal.
CS_A, CS_B	Input	<b>Chip Select:</b> CS is part of the command code. Each channel (A & B) has its own CS signal.
CA[5:0]_A, CA[5:0]_B	Input	<b>Command/Address Inputs:</b> CA signals provide the Command and Address inputs according to the Command Truth Table. Each channel (A&B) has its own CA signals.
DQ[15:0]_A, DQ[15:0]_B	I/O	Data input/output: Bidirectional data bus.
DQS[1:0]_A, DQS#1:0]_A, DQS[1:0]_B, DQS#1:0]_B	I/O	<b>Data Strobe:</b> DQS and DQS# are bi-directional differential output clock signals used to strobe data during a READ or WRITE. The Data Strobe is generated by the DRAM for a READ and is edge-aligned with Data. The Data Strobe is generated by the Memory Controller for a WRITE and must arrive prior to Data. Each byte of data has a Data Strobe signal pair. Each channel (A & B) has its own DQS strobes.
DMI[1:0]_A, DMI[1:0]_B	I/O	<b>Data Mask Inversion:</b> DMI is a bi-directional signal which is driven HIGH when the data on the data bus is inverted, or driven LOW when the data is in its normal state. Data Inversion can be disabled via a mode register setting. Each byte of data has a DMI signal. Each channel (A & B) has its own DMI signals. This signal is also used along with the DQ signals to provide write data masking information to the DRAM. The DMI pin function - Data Inversion or Data mask - depends on Mode Register setting.
ZQ	Reference	Calibration Reference: Used to calibrate the output drive strength and the termination resistance. There is one ZQ pin per die. The ZQ pin shall be connected to VDDQ through a $240\Omega \pm 1\%$ resistor.
VDD1, VDD2, VDDQ	Supply	Power Supplies: Isolated on the die for improved noise immunity.
VSS, VSSQ	GND	Ground Reference: Power supply ground reference.
RESET#	-	<b>RESET:</b> When asserted LOW, the RESET# signal resets all channels of the die. There is one RESET# pad per die.
NC	-	No connect: Not internally connected.

Note 1. "\_A" and "\_B" indicate DRAM channel "\_A" pads are present in all devices. "\_B" pads are present in dual channel SDRAM devices only.



### **Truth Tables**

Operation or timing that is not specified is illegal, and after such an event, in order to guarantee proper operation, the device must be reset or power-cycled and then restarted through the specified initialization sequence before normal operation can continue.

CKE signal has to be held high when the commands listed in the command truth table input.

Table 3. Command Truth Table

	Command Pins			CA	Pins				
Command	cs	CA0	CA1	CA2	CA3	CA4	CA5	CK Edge	Notes
Deselect (DES)	L			)	X			R1	1,2
Multi-Purpose Command	Н	L	L	L	L	L	OP6	R1	120
(MPC)	L	OP0	OP1	OP2	OP3	OP4	OP5	R2	1,2,9
Precharge (PRE)	Н	L	L	L	L	Н	AB	R1	1~4
(Per Bank, All Bank)	L	BA0	BA1	BA2	V	V	V	R2	1~4
Refresh (REF)	Н	L	L	L	Н	L	AB	R1	1~4
(Per Bank, All Bank)	L	BA0	BA1	BA2	V	V	V	R2	1~4
Self Refresh Entry	Н	L	L	L	Н	Н	L	R1	4.0
(SRE)	L			'	V			R2	1,2
Marita 4 (MID 4)	Н	L	L	Н	L	L	BL	R1	4 0 0 7 0
Write -1 (WR-1)	L	BA0	BA1	BA2	V	C9	AP	R2	1~3,6,7,9
Self Refresh Exit	Н	L	L	Н	L	Н	V	R1	4.0
(SRX)	L		ı	,	V		ı	R2	1,2
Mask Write -1	Н	L	L	Н	Н	L	L	R1	4 0 5 0 0
(MWR-1)	L	BA0	BA1	BA2	V	C9	AP	R2	1~3,5,6,9
	Н	L	L	Н	Н	Н	V	R1	4.0
RFU	L		ı	١	V		ı	R2	1,2
D 1 1 (DD 1)	Н	L	Н	L	L	L	BL	R1	1~3,6,7,9
Read -1 (RD-1)	L	BA0	BA1	BA2	V	C9	AP	R2	
CAS-2 (Write-2, Mask Write	Н	L	Н	L	L	Н	C8	R1	
-2, Read- 2, MRR-2, MPC)	L	C2	C3	C4	C5	C6	C7	R2	1,8,9
	Н	L	Н	L	Н	L	V	R1	
RFU	L	V					R2	1,2	
	Н	L	Н	L	Н	Н	V	R1	
RFU	L		ı	١	V		ı	R2	1,2
Mode Register Write -	Н	L	Н	Н	L	L	OP7	R1	4044
1 (MRW-1)	L	MA0	MA1	MA2	MA3	MA4	MA5	R2	1,2,11
Mode Register Write-	Н	L	Н	Н	L	Н	OP6	R1	
2 (MRW-2)	L	OP0	OP1	OP2	OP3	OP4	OP5	R2	1,2,11
Mode Register Read-	Н	L	Н	Н	Н	L	V	R1	
1 (MRR-1)	L	MA0	MA1	MA2	MA3	MA4	MA5	R2	1,2,12
	Н	L	Н	Н	Н	Н	V	R1	
RFU	L		I.	١	V	1	I.	R2	1,2
	H	Н	L	R12	R13	R14	R15	R1	
Activate -1 (ACT-1)	L	BA0	BA1	BA2	V	R10	R11	R2	1~3,10
	H	H	Н	R6	R7	R8	R9	R1	
Activate -2 (ACT-2)	L	R0	R1	R2	R3	R4	R5	R2	1,10

Note 1. All LPDDR4 commands except for Deselect are 2 clock cycle long and defined by states of CS and CA[5:0] at the first rising edge of clock. Deselect command is 1 clock cycle long.

Note 2. "V" means "H" or "L" (a defined logic level). "X" means don't care in which case CA[5:0] can be floated. Note 3.

Bank addresses BA[2:0] determine which bank is to be operated upon.

Note 7. If Burst Length on-the-fly is enabled, BL "HIGH" during Write-1 or Read-1 command indicates that Burst Length should be set on- the-Fly to BL=32. BL "LOW" during Write-1 or Read-1 command indicates that Burst Length should be set on-the-fly to BL=16. If Burst Length onthe-fly is disabled, then BL must be driven to defined logic level "H" or "L".



Note 4. AB "HIGH" during Precharge or Refresh command indicates that command must be applied to all banks and bank address is a don't

Note 5. Mask Write-1 command supports only BL 16. For Mark Write-1 command, CA5 must be driven LOW on first rising clock cycle (R1).

Note 6. AP "HIGH" during Write-1, Mask Write-1 or Read-1 commands indicates that an Auto-Precharge will occur to the bank associated with the Write, Mask Write or Read command.

- Note 8. For CAS-2 commands (Write-2 or Mask Write-2 or Read-2 or MRR-2 or MPC (Only Write FIFO, Read FIFO & Read DQ Calibration), C[1:0] are not transmitted on the CA[5:0] bus and are assumed to be zero. Note that for CAS-2 Write-2 or CAS-2 Mask Write-2 command, C[3:2] must be driven LOW.
- Note 9. Write-1 or Mask Write-1 or Read-1 or Mode Register Read-1 or MPC (Only Write FIFO, Read FIFO & Read DQ Calibration) command must be immediately followed by CAS-2 command consecutively without any other command in between. Write-1 or Mask Write-1 or Read-1 or Mode Register Read-1 or MPC (Only Write FIFO, Read FIFO & Read DQ Calibration) command must be issued first before issuing CAS-2 command. MPC (Only Start & Stop DQS Oscillator, Start & Latch ZQ Calibration) commands do not require CAS-2 command; they require two additional DES or NOP commands consecutively before issuing any other commands.

  Note 10. Activate-1 command must be immediately followed by Activate-2 command consecutively without any other command in between.
- Note 10. Activate-1 command must be immediately followed by Activate-2 command consecutively without any other command in between Activate-1 command must be issued first before issuing Activate-2 command. Once Activate-1 command is issued, Activate-2 command must be issued before issuing another Activate-1 command.
- Note 11. MRW-1 command must be immediately followed by MRW-2 command consecutively without any other command in between. MRW-1 command must be issued first before issuing MRW-2 command.
- Note 12. MRR-1 command must be immediately followed by ČAS-2 command consecutively without any other command in between. MRR-1 command must be issued first before issuing CAS-2 command.



## Power-up, Initialization, and Power-off Procedure

For power-up and reset initialization, in order to prevent DRAM from functioning improperly, default values of the following MR settings are defined as the table below.

Table 4. MRS defaults settings

Table 4. Wite deladits settings										
Item	MRS	Default Setting	Description							
FSP-OP/WR	MR13 OP[7:6]	00 <sub>B</sub>	FSP-OP/WR[0] are enabled							
WLS	MR2 OP[6]	O <sub>B</sub>	Write Latency Set 0 is selected							
WL	MR2 OP[5:3]	000 <sub>B</sub>	WL = 4							
RL	MR2 OP[2:0]	000 <sub>B</sub>	RL = 6, nRTP=8							
nWR	MR1 OP[6:4]	000 <sub>B</sub>	nWR = 6							
DBI-WR/RD	MR3 OP[7:6]	00 <sub>B</sub>	Write & Read DBI are disabled							
CA ODT	MR11 OP[6:4]	000 <sub>B</sub>	CA ODT is disabled							
DQ ODT	MR11 OP[2:0]	000 <sub>B</sub>	DQ ODT is disabled							
VREF(CA) Setting	MR12 OP[6]	1 <sub>B</sub>	VREF(CA) Range[1] enabled							
VREF(CA) Value	MR12 OP[5:0]	001101 <sub>B</sub>	Range1 : 27.2% of VDD2							
VREF(DQ) Setting	MR14 OP[6]	1 <sub>B</sub>	VREF(DQ) Range[1] enabled							
VREF(DQ) Value	MR14 OP[5:0]	001101 <sub>B</sub>	Range1: 27.2% of VDDQ							

### **Voltage Ramp and Device Initialization**

The following sequence shall be used to power up the LPDDR4 device. Unless specified otherwise, these steps are mandatory. Note that the power-up sequence of all channels must proceed simultaneously.

1. While applying power (after Ta), RESET# is recommended to be LOW (≤ 0.2 x VDD2) and all other inputs must be between VILmin and VIHmax. The device outputs remain at High-Z while RESET# is held LOW. Power supply voltage ramp requirements are provided in the table below. VDD1 must ramp at the same time or earlier than VDD2. VDD2 must ramp at the same time or earlier than VDDQ.

Table 5. Voltage Ramp Conditions

After	Applicable Conditions			
To in reached	VDD1 must be greater than VDD2			
Ta is reached	VDD2 must be greater than VDDQ - 200 mV			

Note 1. Ta is the point when any power supply first reaches 300 mV.

Note 2. Voltage ramp conditions in Table 8 apply between Ta and power-off (controlled or uncontrolled).

Note 3. Tb is the point at which all supply and reference voltages are within their defined ranges.

Note 4. Power ramp duration tINIT0 (Tb-Ta) must not exceed 20ms.

Note 5. Thevoltage difference between any of VSS and VSSQ pins must not excess 100 mV.

- 2. Following the completion of the voltage ramp (Tb), RESET# must be maintained LOW. DQ, DMI, DQS and DQS# voltage levels must be between VSSQ and VDDQ during voltage ramp to avoid latch-up. CKE, CK, CK#, CS and CA input levels must be between VSS and VDD2 during voltage ramp to avoid latch-up.
- 3. Beginning at Tb, RESET# must remain LOW for at least tINIT1 (Tc), after which RESET# can be deasserted to HIGH (Tc). At least 10ns before RESET# de-assertion, CKE is required to be set LOW. All other input signals are "Don't Care".



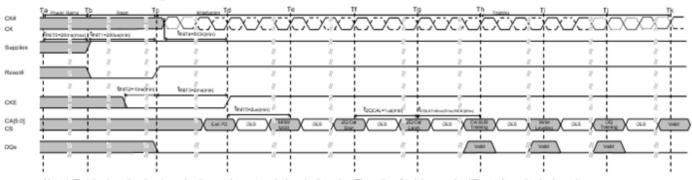


Figure 5. Power Ramp and Initialization Sequence

Note 1. Training is optional and may be done at the system designer's discretion. The order of training may be different than what is shown here.

- 4. After RESET# is de-asserted (Tc), wait at least tINIT3 before activating CKE. Clock (CK, CK#) is required to be started and stabilized for tINIT4 before CKE goes active (Td). CS is required to be maintained LOW when controller activates CKE.
- 5. After setting CKE high, wait minimum of tINIT5 to issue any MRR or MRW commands (Te). For both MRR and MRW commands, the clock frequency must be within the range defined for tCKb. Some AC parameters (for example, tDQSCK) could have relaxed timings (such as tDQSCKb) before the system is appropriately configured.
- 6. After completing all MRW commands to set the Pull-up, Pull-down and Rx termination values, the DRAM controller can issue ZQCAL Start command to the memory (Tf). This command is used to calibrate VOH level and output impedance over process, voltage and temperature. In systems where more than one LPDDR4 DRAM devices share one external ZQ resistor, the controller must not overlap the ZQ calibration sequence of each LPDDR4 device. ZQ calibration sequence is completed after tZQCAL (Tg) and the ZQCAL Latch command must be issued to update the DQ drivers and DQ+CA ODT to the calibrated values.
- 7. After tZQLAT is satisfied (Th) the command bus (internal VREF(CA), CS, and CA) should be trained for high-speed operation by issuing an MRW command (Command Bus Training Mode). This command is used to calibrate the device's internal VREF and align CS/CA with CK for high-speed operation. The LPDDR4 device will power-up with receivers configured for low-speed operations, and VREF (CA) set to a default factory setting. Normal device operation at clock speeds higher than tCKb may not be possible until command bus training has been completed. The command bus training MRW command uses the CA bus as inputs for the calibration data stream, and outputs the results asynchronously on the DQ bus. See command bus training in the MRW section for information on how to enter/exit the training mode.
- 8. After command bus training, DRAM controller must perform write leveling. Write leveling mode is enabled when MR2 OP[7] is high (Ti). See the Write Leveling section for a detailed description of the write leveling entry and exit sequence. In write leveling mode, the DRAM controller adjusts write DQS timing to the point where the device recognizes the start of write DQ data burst with desired write latency.
- 9. After write leveling, the DQ Bus (internal VREF(DQ), DQS, and DQ) should be trained for high-speed operation using the MPC training commands and by issuing MRW commands to adjust VREF(DQ)(Tj). The device will power-up with receivers configured for low-speed operations and VREF(DQ) set to a default factory setting. Normal device operation at clock speeds higher than tCKb should not be attempted until DQ Bus training has been completed. The MPC Read Calibration command is used together with MPC FIFO Write/Read commands to train DQ bus without disturbing the memory array contents. See DQ Bus Training section for detailed DQ Bus Training sequence.
- 10. At Tk the device is ready for normal operation, and is ready to accept any valid command. Any more registers that have not previously been set up for normal operation should be written at this time.



**Table 6. Initialization Timing Parameters** 

	rable of findanzation finding randinotore								
Parameter	Va	lue	Unit	Comment					
Parameter	Min	Max	Offic	Comment					
t <sub>INITO</sub>	-	20	ms	Maximum voltage ramp time					
t <sub>INIT1</sub>	200	-	us Minimum RESET# LOW time after completion of voltage						
t <sub>INIT2</sub>	10	-	ns Minimum CKE low time before RESET# high						
t <sub>INIT3</sub>	2	-	ms	Minimum CKE low time after RESET# high					
t <sub>INIT4</sub>	5	-	t <sub>CK</sub>	Minimum stable clock before first CKE high					
t <sub>INIT5</sub>	2	-	us	Minimum idle time before first MRW/MRR command					
t <sub>ZQCAL</sub>	1	-	us	ZQ calibration time					
t <sub>ZQLAT</sub>	Max(30ns, 8t <sub>CK</sub> )	-	ns	ZQCAL latch quiet time					
t <sub>CKb</sub>	Note *1,2	Note *1,2	ns	Clock cycle time during boot					

#### Note:

- 1. Min tCKb guaranteed by DRAM test is 18 ns.
- 2. The system may boot at a higher frequency than dictated by min tCKb. The higher boot frequency is system dependent.

#### **Reset Initialization with Stable Power**

The following sequence is required for RESET at no power interruption initialization.

- 1. Assert RESET# below 0.2 x VDD2 anytime when reset is needed. RESET# needs to be maintained for minimum tPW RESET. CKE must be pulled LOW at least 10 ns before de-asserting RESET#.
- 2. Repeat steps 4 to 10 in Voltage Ramp section.

**Table 7. Reset Timing Parameter** 

Parameter	Va	lue	Unit	Comment	
	Min	Max			
t <sub>PW_RESET</sub>	100	-	ns	Minimum RESET# low Time for Reset Initialization with stable power	

#### **Power-off Sequence**

The following procedure is required to power off the device.

While powering off, CKE must be held LOW (0.2  $\times$  V<sub>DD2</sub>) and all other inputs must be between V<sub>ILmin</sub> and V<sub>IHmax</sub>. The device outputs remain at High-Z while CKE is held LOW. DQ, DMI, DQS, and DQS# voltage levels must be between V<sub>SSQ</sub> and V<sub>DDQ</sub> during voltage ramp to avoid latch-up. RESET#, CK, CK#, CS and CA input levels must be between V<sub>SS</sub> and V<sub>DD2</sub> during voltage ramp to avoid latch-up.

Tx is the point where any power supply drops below the minimum value specified.

Tz is the point where all power supplies are below 300mV. After Tz, the device is powered off.

**Table 8. Power Supply Conditions** 

After	Applicable Conditions $V_{DD1} \text{ must be greater than } V_{DD2}$ $V_{DD2} \text{ must be greater than } V_{DDQ} - 200 \text{ mV}$			
Ty and Ta	V <sub>DD1</sub> must be greater than V <sub>DD2</sub>			
Tx and Tz	$V_{DD2}$ must be greater than $V_{DDQ}$ - 200 mV			

The voltage difference between Vss, Vssq, and VsscA must not exceed 100mV.



### **Uncontrolled Power-Off Sequence**

When an uncontrolled power-off occurs, the following conditions must be met:

At Tx, when the power supply drops below the minimum values specified, all power supplies must be turned off and all power-supply current capacity must be at zero, except for any static charge remaining in the system.

After Tz (the point at which all power supplies first reach 300mV), the device must power off. During this period, the relative voltage between power supplies is uncontrolled.  $V_{DD1}$  and  $V_{DD2}$  must decrease with a slope lower than 0.5 V/µs between Tx and Tz.

An uncontrolled power-off sequence can occur a maximum of 400 times over the life of the device.

**Table 9. Power-Off Timing** 

Parameter	Symbol	Min	Max	Unit
Maximum power-off ramp time	t <sub>POFF</sub>	-	2	S



### **Read and Write Access Operations**

After a bank has been activated, a read or write command can be executed. This is accomplished by asserting CKE asynchronously, with CS and CA[5:0] set to the proper state (see Command Truth Table) at a rising edge of CK.

The LPDDR4-SDRAM provides a fast column access operation. A single Read or Write command will initiate a burst read or write operation, where data is transferred to/from the DRAM on successive clock cycles. Burst interrupts are not allowed, but the optimal burst length may be set on the fly (see Command Truth Table).

#### **Read Preamble and Postamble**

The DQS strobe for the LPDDR4 requires a pre-amble prior to the first latching edge (the rising edge of DQS with DATA "valid"), and it requires a post-amble after the last latching edge. The pre-amble and post-amble lengths are set via mode register writes (MRW).

For Read operations the pre-amble is 2\*tCK, but the pre-amble is static (no-toggle) or toggling, selectable via mode register.

LPDDR4 will have a DQS Read post-amble of 0.5\*tCK (or extended to 1.5\*tCK). Standard DQS postamble will be 0.5\*tCK driven by the DRAM for Reads. A mode register setting instructs the DRAM to drive an additional (extended) one cycle DQS Read post-amble. The drawings below show examples of DQS Read post-amble for both standard (tRPST) and extended (tRPSTE) post-amble operation.

Figure 6. DQS Read Preamble and Postamble: Toggling Preamble and 0.5nCK Postamble


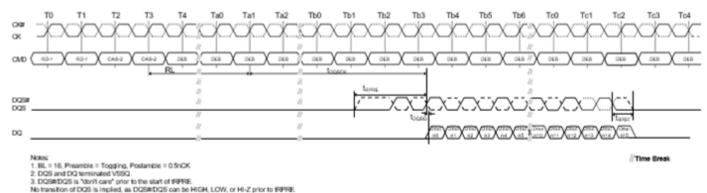


Figure 7. DQS Read Preamble and Postamble: Static Preamble and 1.5nCK Postamble



BL = 16. Preamble = Static. Postamble = 1.5nCK (Extended)

BLE 19, Preamore - Static, Postantine = 1.cn/LK (Extended)
DQS and DQ terminated VSSQ.
DQS#DQS is "don't care" prior to the start of IRPRE.
o transition of DQS is implied, as DQS#DQS can be HIGH, LOW, or HI-Z prior to IRPRE

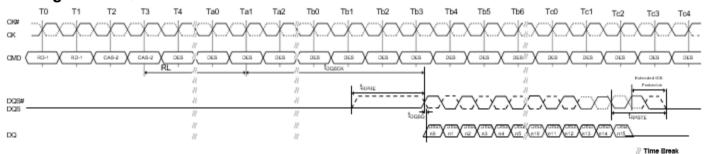

### **Burst Read Operation**

A burst Read command is initiated with CS, and CA[5:0] asserted to the proper state at the rising edge of CK, as defined by the Command Truth Table. The command address bus inputs determine the starting column address for the burst. The two low-order address bits are not transmitted on the CA bus and are implied to be "0", so that the starting burst address is always a multiple of four (ex. 0x0, 0x4, 0x8, 0xC). The read latency (RL) is defined from the last rising edge of the clock that completes a read command (Ex: the second rising edge of the CAS-2 command) to the rising edge of the clock from which the tDQSCK delay is measured. The first valid data is available RL \* tCK + tDQSCK + tDQSQ after the rising edge of Clock that completes a read command. The data strobe output is driven tRPRE before the first valid rising strobe edge. The first data-bit of the burst is synchronized with the first valid (i.e., post-preamble) rising edge of the data strobe. Each subsequent data out appears on each DQ pin, edge-aligned with the data strobe. At the end of a burst the DQS signals are driven for another half cycle post-amble, or for a 1.5cycle postamble if the programmable post-amble bit is set in the mode register. The RL is programmed in the mode registers. Pin timings for the data strobe are measured relative to the cross-point of DQS and DQS#.

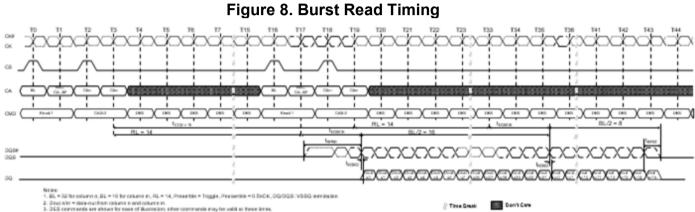



Figure 9. Burst Read followed by Burst Write or Burst Mask Write

The minimum time from a Burst Read command to a Write or MASK WRITE command is defined by the read latency (RL) and the burst length (BL).

Minimum Read-to-Write or Mask Write latency is RL+RU(tDQSCK(max)/tCK)+BL/2+RD(tRPST)-WL+tWPRE.




Figure 10. Seamless Burst Read

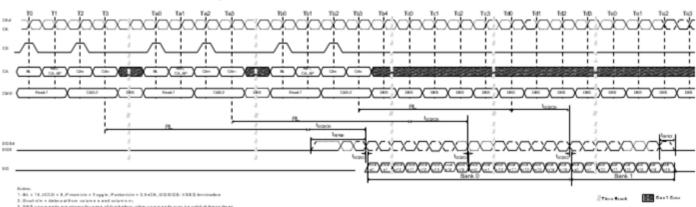

The seamless Burst Read operation is supported by placing a Read command at every tCCD(Min) interval for BL16 (or every 2 x tCCD(Min) for BL32).

The seamless Burst Read can access any open bank.

Figure 11. Read Timing

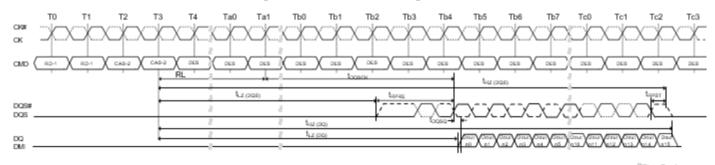

Notes:

1. BL = 16, Preamble = Toggling, Postamble = 0.5nCK

2. DQS, DQ and DMI terminated VSSO.

3. Output driver does not turn on before an end point of tLZ(DQS) and tLZ(DQ).

4. Output driver does not turn off before an end point of tHZ(DQS) and tHZ(DQ).


DQS/DQS# is "don't care" prior to the start of tWPRE.
 No transition of DQS is implied, as DQS/DQS# can be HIGH, LOW, or HI-Z prior to tWPRE.

#### Write Preamble and Postamble

The DQS strobe for the LPDDR4 requires a pre-amble prior to the first latching edge (the rising edge of DQS with DATA "valid"), and it requires a post-amble after the last latching edge. The pre-amble and post-amble lengths are set via mode register writes (MRW).

For Write operations, a 2\*tCK pre-amble is required at all operating frequencies.

LPDDR4 will have a DQS Write post-amble of 0.5\*tCK or extended to 1.5\*tCK. Standard DQS post-amble will be 0.5\*tCK driven by the memory controller for Writes. A mode register setting instructs the DRAM to drive an additional (extended) one cycle DQS Write post-amble. The drawings below show examples of DQS Write post-amble for both standard (tWPST) and extended (tWPSTE) post-amble operation.

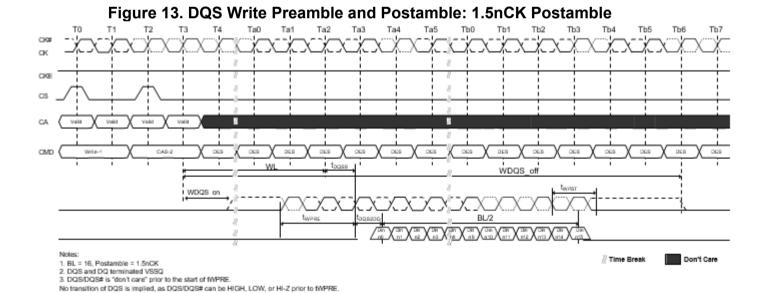






## **Burst Write Operation**

A burst Write command is initiated with CS, and CA[5:0] asserted to the proper state at the rising edge of CK, as defined by the Command Truth Table. Column addresses C[3:2] should be driven LOW for Burst Write commands, and column addresses C[1:0] are not transmitted on the CA bus (and are assumed to be zero), so that the starting column burst address is always aligned with a 32B boundary. The write latency (WL) is defined from the last rising edge of the clock that completes a write command (Ex: the second rising edge of the CAS-2 command) to the rising edge of the clock from which tDQSS is measured. The first valid "latching" edge of DQS must be driven WL \* tCK + tDQSS after the rising edge of Clock that completes a write command.

The LPDDR4-SDRAM uses an un-matched DQS-DQ path for lower power, so the DQS-strobe must arrive at the SDRAM ball prior to the DQ signal by the amount of tDQS2DQ. The DQS-strobe output is driven tWPRE before the first valid rising strobe edge. The tWPRE pre-amble is required to be 2 x tCK. The DQS strobe must be trained to arrive at the DQ pad center-aligned with the DQ-data. The DQ-data must be held for tDIVW (data input valid window) and the DQS must be periodically trained to stay centered in the tDIVW window to compensate for timing changes due to temperature and voltage variation. Burst data is captured by the SDRAM on successive edges of DQS until the 16 or 32 bit data burst is complete. The DQS-strobe must remain active (toggling) for tWPST (Write post-amble) after the completion of the burst Write. After a burst Write operation, tWR must be satisfied before a Precharge command to the same bank can be issued. Pin input timings are measured relative to the cross point of DQS and DQS#.

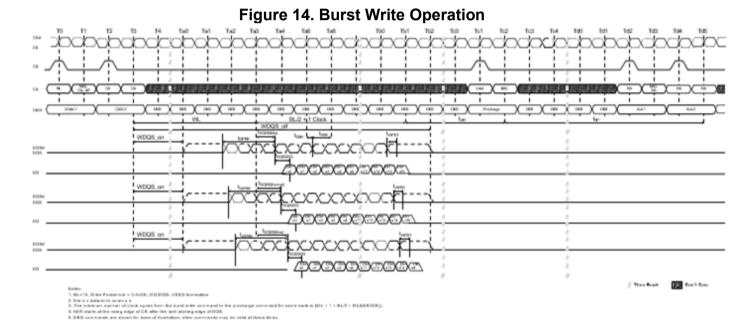

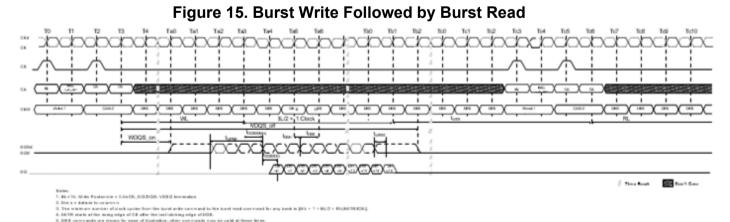

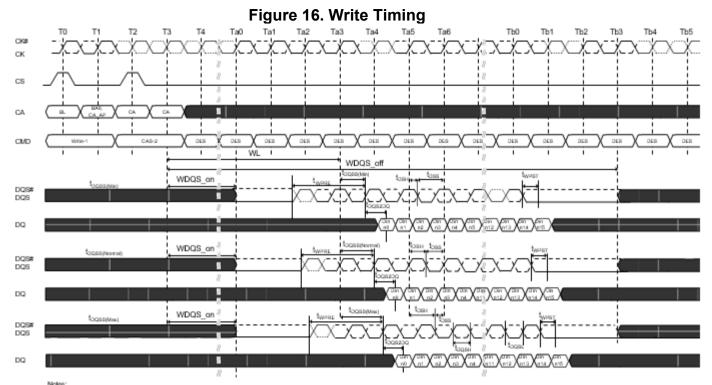

Notes:

1. BL=16, Write Postamble = 0.5nCK

2. Din n = data-in to column n

3. DES commands are shown for ease of illustration; other commands may be valid at these times.

// Time Break

Don't Care

### Write and Masked Write operation DQS controls (WDQS Control)

LPDDR4-SDRAMs support write and masked write operations with the following DQS controls. Before and after Write and Masked Write operations are issued, DQS/DQS# is required to have a sufficient voltage gap to make sure the write buffers operating normally without any risk of metastability.

The LPDDR4-SDRAM is supported by either of two WDQS control modes below.

Mode 1: Read Based Control

Mode 2: WDQS\_on / WDQS\_off definition based control.

Regardless of ODT enable/disable, WDQS related timing described here does not allow any change of existing command timing constraints for all read/write operations. In case of any conflict or ambiguity on the command timing constraints caused by the specification here, the specification defined in the Timing Constraints for Training Commands table should have higher priority than WDQS control requirements.

To prevent write preamble related failure, either of the two WDQS controls to the device should be supported.


#### WDQS Control Mode 1 - Read Based Control

The LPDDR4-SDRAM needs to be guaranteed the differential WDQS, but the differential WDQS can be controlled as described below. WDQS control requirements here can be ignored while differential read DQS is operated or while DQS hands over from Read to Write and vice versa.

- 1. At the time a write / masked write command is issued, SoC makes the transition from driving DQS# high to driving differential DQS/DQS#, followed by normal differential burst on DQS pins.
- At the end of post amble of write / masked write burst, SoC resumes driving DQS# high through the subsequent states except for DQS toggling and DQS turn around time of WT-RD and RD-WT as long as CKE is high.

When CKE is low, the state of DQS and DQS# is allowed to be "Don't Care".

Figure 17. WDQS Control Mode 1 - Read Based Control





### WDQS Control Mode 2 - WDQS on/off

After write / masked write command is issued, DQS and DQS# required to be differential from WDQS\_on, and DQS and DQS# can be "Don't Care" status from WDQS\_off of write / masked write command. When ODT is enabled, WDQS\_on and WDQS\_off timing is located in the middle of the operations. When host disables ODT, WDQS\_on and WDQS\_off constraints conflict with tRTW. The timing does not conflict when ODT is enabled because WDQS\_on and WDQS\_off timing is covered in ODTLon and ODTLoff. However, regardless of ODT on/off, WDQS\_on/off timing below does not change any command timing constraints for all read and write operations. In order to prevent the conflict, WDQS\_on/off requirement can be ignored when WDQS\_on/off timing is overlapped with read operation period including Read burst period and tRPST or overlapped with turn-around time (RD-WT or WT-RD). In addition, the period during DQS toggling caused by Read and Write can be counted as WDQS\_on/off.

#### **Parameters**

- WDQS\_on: the max delay from write / masked write command to differential DQS and DQS#.
- WDQS off: the min delay for DQS and DQS# differential input after the last write / masked write command.
- WDQS\_Exception: the period where WDQS\_on and WDQS\_off timing is overlapped with read operation or with DQS turn around (RD-WT, WT-RD).
  - WDQS\_Exception @ ODT disable = max (WL WDQS\_on+ tDQSTA tWPRE n\*tCK,0 tCK) where RD to WT command gap = tRTW(min)@ODT disable + n\*tCK
  - WDQS Exception @ ODT enable = tDQSTA

Table 10. WDQS\_on / WDQS\_off Definition

V	/L	nWR	nRTP	WDQS_	on (Max)	WDQS_	off (Min)	Lower Clock	Upper Clock
Set A	Set B	HVVK	IIKIP	Set A	Set B	Set A	Set B	Frequency Limit (>)	Frequency Limit (≤)
4	4	6	8	0	0	15	15	10	266
6	8	10	8	0	0	18	20	266	533
8	12	16	8	0	6	21	25	533	800
10	18	20	8	4	12	24	32	800	1066
12	22	24	10	4	14	27	37	1066	1333
14	26	30	12	6	18	30	42	1333	1600
16	30	34	14	6	20	33	47	1600	1866
nCK	nCK	nCK	nCK	nCK	nCK	nCK	nCK	MHz	MHz

#### Notes:

### Table 11. WDQS on / WDQS off Allowable Variation Range

	Min	Max	Unit
WDQS_on	-0.25	0.25	tCK(avg)
WDQS_off	-0.25	0.25	tCK(avg)

### Table 12. DQS turn around parameter

Parameter	Description	Max	Unit	Note
<b>t</b> dqsta	Turn-around time RDQS to WDQS for WDQS control case	TBD	tCK(avg)	1


Note 1. tDQSTA is only applied to WDQS\_exception case when WDQS Control. Except for WDQS Control, tDQSTA can be ignored.



WDQS\_on/off requirement can be ignored when WDQS\_on/off timing is overlapped with read operation period including read burst period and tRPST or overlapped with turn-around time (RD-WT or WT-RD).


<sup>2.</sup> DQS toggling period caused by read and write can be counted as WDQS on/off.



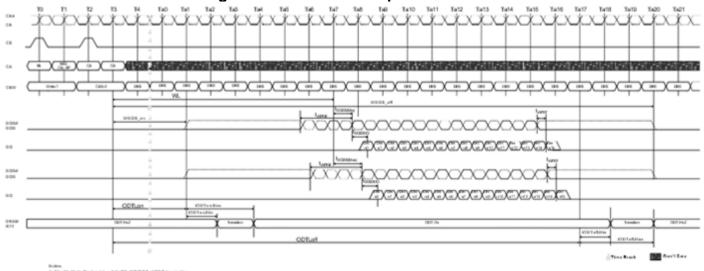


SMS commands are shown for more of distribution, other command.
 SMSM RTT is only applied when ODT in work led (MR11 OFQ2.5) in

Figure 19. Burst Read followed by Burst Write or Burst Mask Write (ODT Disable)

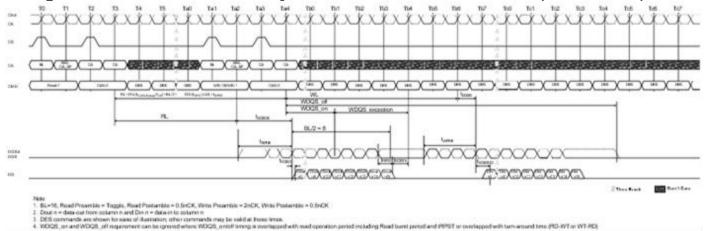

## Figure 20. Burst Read followed by Burst Write or Burst Mask Write (ODT Enable)

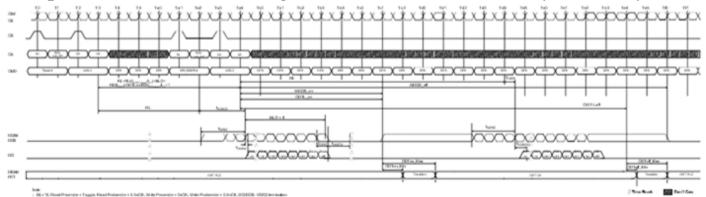

: DEComments on shows to reason file belong, of an assessment may be valid at terms from.

- VEGIL, most VEGIL, of may are not use by container MGSL, point from processing and with made upon the processing from the other processing of the containing from the containing from the other processing and the containing from the co


## **On-Die Termination (ODT)**

ODT (On-Die Termination) is a feature of the LPDDR4 SDRAM that allows the DRAM to turn on/off termination resistance for each DQ, DQS, DQS# and DMI signals without the ODT control pin. The ODT feature is designed to improve signal integrity of the memory channel by allowing the DRAM controller to turn on and off termination resistance for any target DRAM devices during Write or Mask Write operation.

The ODT feature is off and cannot be supported in Power Down and Self Refresh modes.

A simple functional representation of the DRAM ODT feature is shown below.

Figure 21. Functional representation of ODT

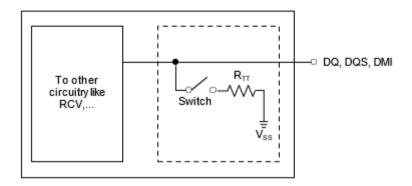

The switch is enabled by the internal ODT control logic, which uses the Write-1 or Mask Write-1 command and other mode register control information. The value of RTT is determined by the settings of Mode Register bits.

## **ODT Mode Register**

The ODT Mode is enabled if MR11 OP[3:0] are non-zero. In this case, the value of RTT is determined by the settings of those bits. The ODT Mode is disabled if MR11 OP[3] = 0.



### **Asynchronous ODT**

When ODT Mode is enabled in MR11 OP[3:0], DRAM ODT is always Hi-Z. DRAM ODT feature is automatically turned ON asynchronously based on the Write-1 or Mask Write-1 command that DRAM samples. After the write burst is complete, DRAM ODT featured is automatically turned OFF asynchronously.

Following timing parameters apply when DRAM ODT mode is enabled:

- ODTLon, tODTon,min, tODTon,max
- ODTLoff, tODToff,min, tODToff,max

ODTLon is a synchronous parameter and it is the latency from CAS-2 command to tODTon reference. ODTLon latency is a fixed latency value for each speed bin. Each speed bin has a different ODTLon latency.

Minimum RTT turn-on time (tODTon,min) is the point in time when the device termination circuit leaves high impedance state and ODT resistance begins to turn on.

Maximum RTT turn on time (tODTon,max) is the point in time when the ODT resistance is fully on.

tODTon,min and tODTon,max are measured once ODTLon latency is satisfied from CAS-2 command.

ODTLoff is a synchronous parameter and it is the latency from CAS-2 command to tODToff reference.

ODTLoff latency is a fixed latency value for each speed bin. Each speed bin has a different ODTLoff latency.

Minimum RTT turn-off time (tODToff,min) is the point in time when the device termination circuit starts to turn off the ODT resistance.

Maximum ODT turn off time (tODToff,max) is the point in time when the on-die termination has reached high impedance.

tODToff,min and tODToff,max are measured once ODTLoff latency is satisfied from CAS-2 command.

Table 13. ODTLon and ODTLoff Latency

ODTLon	Latency <sup>1</sup>	ODTLoff	Latonov²	Lawren Clask Francisco	Harris Clark Francisco
tWPRE	tWPRE = 2tCK		Latericy	Lower Clock Frequency Limit [MHz] ( >)	Upper Clock Frequency Limit [MHz] (≦)
WL Set "A"	WL Set "B"	WL Set "A" WL Set "B"			,
N/A	N/A	N/A	N/A	10	266
N/A	N/A	N/A	N/A	266	533
N/A	6	N/A 22		533	800
4	12	20	28	800	1066
4	14	22	32	1066	1333
6	18	24	36	1333	1600
6	20	26	40	1600	1866
nCK	nCK	nCK	nCK	MHz	MHz

#### Notes:

- ODTLon is referenced from CAS-2 command.
- 2. ODTLoff as shown in table assumes BL=16. For BL32, 8 tCK should be added.

Table 14. Asynchronous ODT Turn On and Turn Off Timing

Parameter	800 - 1866 MHz	Unit				
tODTon, min	1.5	ns				
tODTon, max	3.5	ns				
tODToff, min	1.5	ns				
tODToff, max	3.5	ns				



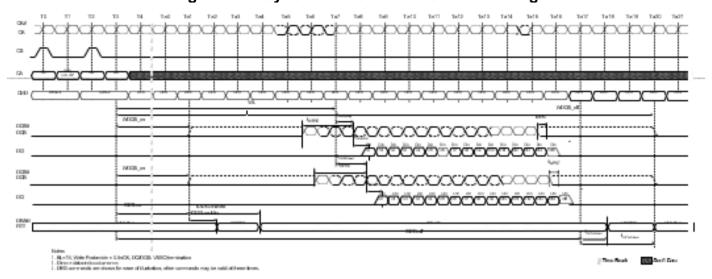


Figure 22. Asynchronous ODTon/ODToff Timing

## **ODT during Write Leveling**

If ODT is enabled in MR11 OP[3:0], in Write Leveling mode, DRAM always provides the termination on DQS/DQS# signals. DQ termination is always off in Write Leveling mode regardless.

**Table 15. Termination Function in Write Leveling Mode** 

ODT Enabled in MR11	DQS/DQS# termination	DQ termination
Disabled	OFF	OFF
Enabled	ON	OFF


### On Die Termination for DQ, DQS and DMI

On-Die Termination effective resistance RTT is defined by MR11 OP[2:0].

ODT is applied to the DQ, DMI, DQS and DQS# pins.

A functional representation of the on-die termination is shown below.

Figure 23. On Die Termination

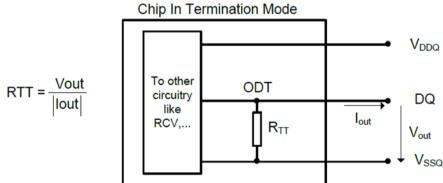

## Table 16. ODT DC Electrical Characteristics for DQ, DQS and DMI

(Assuming RZQ = 240  $\Omega$  ±1% over the entire operating temperature range after a proper ZQ calibration up to 3200Mbps)

MR11 OP[2:0]	RTT	Vout	Min.	Nom.	Max.	Unit	Note
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ	1,2,3
001	240Ω	$V_{OM}dc = 0.33 \times V_{DDQ}$	0.9	1	1.1	RZQ	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.2	RZQ	1,2,3
		$V_{OL}dc=0.1 \times V_{DDQ}$	0.8	1	1.1	RZQ/2	1,2,3
010	120Ω	$V_{OM}dc = 0.33 \times V_{DDQ}$	0.9	1	1.1	RZQ/2	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.2	RZQ/2	1,2,3
		$V_{OL}dc = 0.1 \times V_{DDQ}$	0.8	1	1.1	RZQ/3	1,2,3
011	80Ω	$V_{OM}dc = 0.33 \times V_{DDQ}$	0.9	1	1.1	RZQ/3	1,2,3
		V <sub>OH</sub> dc= 0.5 x V <sub>DDQ</sub>	0.9	1	1.2	RZQ/3	1,2,3
		$V_{OL}dc = 0.1 \times V_{DDQ}$	0.8	1	1.1	RZQ/4	1,2,3
100	60Ω	$V_{OM}dc = 0.33 \times V_{DDQ}$	0.9	1	1.1	RZQ/4	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.2	RZQ/4	1,2,3
		$V_{OL}dc = 0.1 \times V_{DDQ}$	0.8	1	1.1	RZQ/5	1,2,3
101	48Ω	$V_{OM}dc = 0.33 \times V_{DDQ}$	0.9	1	1.1	RZQ/5	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.2	RZQ/5	1,2,3
		$V_{OL}dc = 0.1 \times V_{DDQ}$	0.8	1	1.1	RZQ/6	1,2,3
110	40Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/6	1,2,3
		V <sub>OH</sub> dc= 0.5 x V <sub>DDQ</sub>	0.9	1	1.2	RZQ/6	1,2,3
Mismatch DQ-	DQ within byte	0.33 x V <sub>DDQ</sub>	-	-	2	%	1,2,4

- 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see the section on voltage and temperature sensitivity.
- 2. Pull-down ODT resistors are recommended to be calibrated at 0.33 x VDDQ. Other calibration schemes may be used to achieve the linearity spec shown above, e.g., calibration at 0.5 x VDDQ and 0.1 x VDDQ.
- 3. Measurement definition for RTT: TBD.
- 4. DQ to DQ mismatch within byte variation for a given component including DQS and DQS# (characterized).



### Table 17. ODT DC Electrical Characteristics for DQ, DQS and DMI

(Assuming RZQ = 240  $\Omega$  ±1% over the entire operating temperature range after a proper ZQ calibration for beyond 3200Mbps)

MR11 OP[2:0]	RTT	Vout	Min.	Nom.	Max.	Unit	Note
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ	1,2,3
001	240Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.3	RZQ	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ/2	1,2,3
010	120Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/2	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.3	RZQ/2	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ/3	1,2,3
011	80Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/3	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.3	RZQ/3	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ/4	1,2,3
100	60Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/4	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.3	RZQ/4	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ/5	1,2,3
101	48Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/5	1,2,3
		$V_{OH}dc = 0.5 \times V_{DDQ}$	0.9	1	1.3	RZQ/5	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DDQ</sub>	0.8	1	1.1	RZQ/6	1,2,3
110	40Ω	V <sub>OM</sub> dc= 0.33 x V <sub>DDQ</sub>	0.9	1	1.1	RZQ/6	1,2,3
		V <sub>OH</sub> dc= 0.5 x V <sub>DDQ</sub>	0.9	1	1.3	RZQ/6	1,2,3
Mismatch DQ-	DQ within byte	0.33 x V <sub>DDQ</sub>	-	-	2	%	1,2,4

#### Notes:

- 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see the section on voltage and temperature sensitivity.
- 2. Pull-down ODT resistors are recommended to be calibrated at 0.33 x VDDQ. Other calibration schemes may be used to achieve the linearity spec shown above, e.g., calibration at 0.5 x VDDQ and 0.1 x VDDQ.
- 3. Measurement definition for RTT: TBD.
- 4. DQ to DQ mismatch within byte variation for a given component including DQS and DQS# (characterized).

## **Output Driver and Termination Register Temperature and Voltage Sensitivity**

If temperature and/or voltage change after calibration, the tolerance limits are widen according to the tables below.

**Table 18. Output Driver and Termination Register Sensitivity Definition** 

Resistor	<b>Definition Point</b>	Min	Max	Unit	Note
RONPD	$0.33 \times V_{DDQ}$	90- dRondT x  ΔT )- dRondV x  ΔV )	110+ dRondT x $ \Delta T $ )+ dRondV x $ \Delta V $ )	%	1,2
VOHPU	$0.33 \times V_{DDQ}$	90- dVOHdT x  ΔT )- dVOHdV x  ΔV )	110+ dVOHdT x $ \Delta T $ )+ dVOHdV x $ \Delta V $ )	%	1,2,5
RTT(I/O)	$0.33 \times V_{DDQ}$	90- dRondT x $ \Delta T $ )- dRondV x $ \Delta V $ )	110+ dRondT x $ \Delta T $ )+ dRondV x $ \Delta V $ )	%	1,2,3
RTT(In)	0.33 x V <sub>DD2</sub>	90- dRondT x $ \Delta T $ )- dRondV x $ \Delta V $ )	110+ dRondT x $ \Delta T $ )+ dRondV x $ \Delta V $ )	%	1,2,4

#### Notes:

- 1. ΔT = T T @ Calibration), ΔV = V V(@ Calibration)
- 2. dRONdT, dRONdV, dVOHdT, dVOHdV, dRTTdV, and dRTTdT are not subject to production test but are verified by design and characterization.
- 3. This parameter applies to Input/Output pin such as DQS, DQ and DMI.
- 4. This parameter applies to input pins such as CK, CA, and CS.
- 5. Refer to Pull Up/Pull Down Driver Characteristics for VOHPU.

Table 19. Output Driver and Termination Register Temperature and Voltage Sensitivity

abio ioi oatpa	· Diivoi aiia ioiiiiiaaaaii itogiotoi	. omporatare and	a ronago como	
Symbol	Parameter	Min	Max	Unit
dRONdT	RON Temperature Sensitivity	0	0.75	%/°C
dRONdV	RON Voltage Sensitivity	0	0.2	%/mV
dVOHdT	VOH Temperature Sensitivity	0	0.75	%/°C
dVOHdV	VOH Voltage Sensitivity	0	0.35	%/mV
dRTTdT	RTT Temperature Sensitivity	0	0.75	%/°C
dRTTdV	RTT Voltage Sensitivity	0	0.2	%/mV



## Pull Up/Pull Down Driver Characteristics and Calibration

Table 20. Pull-down Driver Characteristics, with ZQ Calibration

RONPD,nom	Resistor	Min	Nom	Max	Unit
40 Ohm	RON40PD	0.9	1	1.1	RZQ/6
48 Ohm	RON48PD	0.9	1	1.1	RZQ/5
60 Ohm	RON60PD	0.9	1	1.1	RZQ/4
80 Ohm	RON80PD	0.9	1	1.1	RZQ/3
120 Ohm	RON120PD	0.9	1	1.1	RZQ/2
240 Ohm	RON240PD	0.9	1	1.1	RZQ/1

#### Notes:

All value are after ZQ Calibration. Without ZQ Calibration RONPD values are ± 30%.

Table 21. Pull-Up Characteristics, with ZQ Calibration

VOHPU,nom	VOH,nom(mV)	Min	Nom	Max	Unit
VDDQ/2.5	440	0.9	1	1.1	VOH,nom
VDDQ/3	367	0.9	1	1.1	VOH,nom

#### Notes:

- 1. All values are after ZQ Calibration. Without ZQ Calibration VOH(nom) values are ± 30%.
- 2. VOH,nom (mV) values are based on a nominal VDDQ = 0.6V.

### **Table 22. Valid Calibration Points**

	VOHPU,nom	ODT Value						
	VOHPO,IIOIII	240	120	80	60	48	40	
	VDDQ/2.5	VALID	VALID	VALID	DNU	DNU	DNU	
	VDDQ/3	VALID	VALID	VALID	VALID	VALID	VALID	

- 1. Once the output is calibrated for a given VOH(nom) calibration point, the ODT value may be changed without recalibration.
- 2. If the VOH(nom) calibration point is changed, then re-calibration is required.
- 3. DNU = Do Not Úse



#### On Die Termination for Command/Address Bus

ODT (On-Die Termination) is a feature of the LPDDR4 SDRAM that allows the SDRAM to turn on/off termination resistance for CK, CK#, CS and CA[5:0] signals without the ODT control pin.

The ODT feature is designed to improve signal integrity of the memory channel by allowing the DRAM controller to turn on and off termination resistance for any target DRAM devices via Mode Register setting.

A simple functional representation of the DRAM ODT feature is shown below.

To other circuitry like RCV,...

To other circuitry like RCV,...

Switch

Vss

Figure 24. Functional Representation of CA ODT

### **ODT Mode Register and ODT State Table**

ODT termination values are set and enabled via MR11. The CA bus (CK, CK#, CS, CA[5:0]) ODT resistance values are set by MR11 OP[6:4]. The default state for the CA is ODT disabled.

ODT is applied on the CA bus to the CK, CK#, CS and CA[5:0] signals. The CA ODT of the device is designed to enable one rank to terminate the entire command bus in a multi-rank system, so only one termination load will be present even if multiple devices are sharing the command signals. For this reason, CA ODT remains on even when the device is in the power-down or Self Refresh power-down states. The die has a bond pad (ODT\_CA) for multi-rank operations. When the ODT\_CA pad is LOW, the die will not terminate the CA bus regardless of the state of the mode register CA ODT bits (MR11 OP[6:4]). If, however, the ODT\_CA bond pad is HIGH, and the mode register CA ODT bits are enabled, the die will terminate the CA bus with the ODT values found in MR11 OP[6:4]. In a multi-rank system, the terminating rank should be trained first, followed by the non-terminating rank(s).

ODTE-CA MR11[6:4]	ODT-CA bond pad	ODTD-CA MR22[5]	ODTF-CK MR22[3]	ODTF-CS MR22[4]	ODT State for CA	ODT State for CK/CK#	ODT State for CS
Disabled <sup>1</sup>	Valid <sup>2</sup>	Valid <sup>3</sup>	Valid <sup>3</sup>	Valid <sup>3</sup>	Off	Off	Off
Valid <sup>3</sup>	0	Valid <sup>3</sup>	0	0	Off	Off	Off
Valid <sup>3</sup>	0	Valid <sup>3</sup>	0	1	Off	Off	On
Valid <sup>3</sup>	0	Valid <sup>3</sup>	1	0	Off	On	Off
Valid <sup>3</sup>	0	Valid <sup>3</sup>	1	1	Off	On	On
Valid <sup>3</sup>	1	0	Valid <sup>3</sup>	Valid <sup>3</sup>	On	On	On
Valid <sup>3</sup>	1	1	Valid <sup>3</sup>	Valid <sup>3</sup>	Off	On	On

Table 23. Command Bus ODT State

- 1. Default Value.
- 2. "Valid" means "H or L but a defined logic level)".
- 3. "Valid" means "0 or 1".
- 4. The state of ODT\_CA is not changed when the DRAM enters power-down mode. This maintains termination for alternate ranks in multi-rank systems.




## **ODT Mode Register and ODT Characteristics**

## Figure 25. Functional Representation of CA ODT

#### Chip In Termination Mode



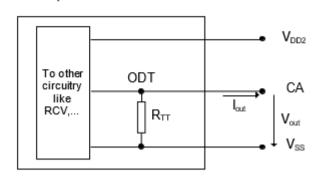

### Table 24. ODT DC Electrical Characteristics for Command/Address Bus

(Assuming RZQ = 240  $\Omega$  ±1% over the entire operating temperature range after a proper ZQ calibration up to 3200Mbps)

MR11 OP[6:4]	RTT	Vout	Min.	Nom.	Max.	Unit	Note
		$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ	1,2,3
001	240Ω	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ	1,2,3
		$V_{OL}dc = 0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/2	1,2,3
010	120Ω	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/2	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ/2	1,2,3
		$V_{OL}dc = 0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/3	1,2,3
011	200	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/3	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ/3	1,2,3
	60Ω	$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/4	1,2,3
100		$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/4	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ/4	1,2,3
	48Ω	$V_{OL}dc = 0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/5	1,2,3
101		$V_{OM}dc=0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/5	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ/5	1,2,3
110	40Ω	$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/6	1,2,3
		V <sub>OM</sub> dc= 0.33 x V <sub>DD2</sub>	0.9	1	1.1	RZQ/6	1,2,3
		$V_{OH}dc = 0.5 \times V_{DD2}$	0.9	1	1.2	RZQ/6	1,2,3
Mismatch CA-CA within clk group		0.33 x V <sub>DD2</sub>	-	-	TBD <sup>1</sup>	%	1,2,4

- 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see the section on voltage and temperature sensitivity.
- 2. Pull-down ODT resistors are recommended to be calibrated at 0.33 x VDDQ. Other calibration schemes may be used to achieve the linearity spec shown above, e.g., calibration at 0.5 x VDDQ and 0.1 x VDDQ. 3. Measurement definition for RTT: TBD.
- 4. CA to CA mismatch within clock group (CA. CS) variation for a given component including CK and CK# (characterized).

CA - CA mismatch = 
$$\frac{RODT (max) - RODT (min)}{RODT (avg)}$$



Table 25. ODT DC Electrical Characteristics for Command/Address Bus

(Assuming RZQ = 240  $\Omega$  ±1% over the entire operating temperature range after a proper ZQ calibration for beyond 3200Mbps)


MR11 OP[6:4]	RTT	Vout	Min.	Nom.	Max.	Unit	Note
		$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ	1,2,3
001	240Ω	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ	1,2,3
		$V_{OH}dc=0.5 \times V_{DD2}$	0.9	1	1.3	RZQ	1,2,3
		$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/2	1,2,3
010	120Ω	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/2	1,2,3
		$V_{OH}dc=0.5 \times V_{DD2}$	0.9	1	1.3	RZQ/2	1,2,3
		V <sub>OL</sub> dc= 0.1 x V <sub>DD2</sub>	0.8	1	1.1	RZQ/3	1,2,3
011	80Ω	$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/3	1,2,3
		V <sub>OH</sub> dc= 0.5 x V <sub>DD2</sub>	0.9	1	1.3	RZQ/3	1,2,3
	60Ω	$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/4	1,2,3
100		V <sub>OM</sub> dc= 0.33 x V <sub>DD2</sub>	0.9	1	1.1	RZQ/4	1,2,3
		$V_{OH}dc=0.5 \times V_{DD2}$	0.9	1	1.3	RZQ/4	1,2,3
	48Ω	$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/5	1,2,3
101		$V_{OM}dc = 0.33 \times V_{DD2}$	0.9	1	1.1	RZQ/5	1,2,3
		$V_{OH}dc=0.5 \times V_{DD2}$	0.9	1	1.3	RZQ/5	1,2,3
	40Ω	$V_{OL}dc=0.1 \times V_{DD2}$	0.8	1	1.1	RZQ/6	1,2,3
110		V <sub>OM</sub> dc= 0.33 x V <sub>DD2</sub>	0.9	1	1.1	RZQ/6	1,2,3
		V <sub>OH</sub> dc= 0.5 x V <sub>DD2</sub>	0.9	1	1.3	RZQ/6	1,2,3
Mismatch CA-CA within clk group		0.33 x V <sub>DD2</sub>	-	-	TBD <sup>1</sup>	%	1,2,4

#### Notes:

- 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see the section on voltage and temperature sensitivity.
- 2. Pull-down ODT resistors are recommended to be calibrated at 0.33 x VDD2. Other calibration schemes may be used to achieve the linearity spec shown above, e.g., calibration at 0.5 x VDD2 and 0.1 x VDD2.
- 3. Measurement definition for RTT: TBD.
- 4. CA to CA mismatch within clock group (CA. CS) variation for a given component including CK and CK# (characterized).

CA - CA mismatch =  $\frac{\text{RODT (max) - RODT (min)}}{\text{RODT (avg)}}$ 

Figure 26. ODT for Command/Address setting update timing in 4 Clock Cycle Command

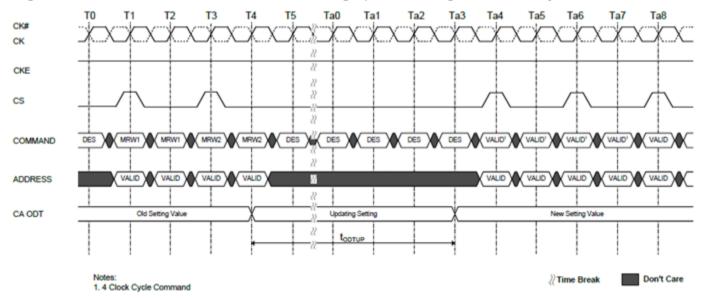

**Table 26. ODT CA AC Timing** 

	1 0.010 201 02			
Symbol Parameter		Min	Max	Unit
tODTUP	ODT CA Value Update Time	RU(20ns/tCK(AVG))	-	

### **Multi-Purpose Command (MPC)**

LPDDR4-SDRAMs use the MPC command to issue a NOP and to access various training modes. The MPC command is initiated with CS, and CA[5:0] asserted to the proper state at the rising edge of CK, as defined by the Command Truth Table. The MPC command has seven operands (OP[6:0]) that are decoded to execute specific commands in the SDRAM. OP[6] is a special bit that is decoded on the first rising CK edge of the MPC command. When OP[6]=0 then the SDRAM executes a NOP (no operation) command, and when OP[6]=1 then the SDRAM further decodes one of several training commands.

When OP[6]=1 and when the training command includes a Read or Write operation, the MPC command must be followed immediately by a CAS-2 command. For training commands that Read or Write the SDRAM, read latency (RL) and write latency (WL) are counted from the second rising CK edge of the CAS-2 command with the same timing relationship as any normal Read or Write command. The operands of the CAS-2 command following a MPC Read/Write command must be driven LOW.

The following MPC commands must be followed by a CAS-2 command:

- Write FIFO
- Read FIFO
- Read DQ Calibration

All other MPC-1 commands do not require a CAS-2 command, including:

- NOP
- Start DQS Interval Oscillator
- Stop DQS Interval Oscillator
- Start ZQ Calibration
- Latch ZQ Calibration

#### Table 27. MPC Command Definition

	Con	nmand Pins	5			CA	Pins				
Command	CKE		- cs	040	014	CA2	042	044	CA5	CK Edge	Note
Command	CK(n-1)	CK(n)	CS	CA0	CA1	CAZ	CA3	CA4	CAS		
MPC	Н	Н	Н	L	L	L	L	L	OP6	R1	4.0
(Train, NOP)	п	П	L	OP0	OP1	OP2	OP3	OP4	OP5	R2	1,2
Functi	on	Operand			Data				Note		
Training Modes  OP[6:0]  OXXXXXXB: NOP 1000001B: RD FIFO: RI 1000011B: RD DQ Calib 1000101B: RFU 1000111B: WR FIFO: W 1001001B: Start DQS O: 1001101B: Stop DQS O: 1001111B: ZQCal Start 1010001B: ZQCal Latch All Others: Reserved				Calibration D: WR FIFC S Osc S Osc tart atch	(MR32/MR	40)			1,2,3		

- 1. See command truth table for more information.
- 2. MPC commands for Read or Write training operations must be immediately followed by CAS-2 command consecutively without any other commands in-between. MPC command must be issued first before issuing the CAS-2 command.
- 3. Write FIFO and Read FIFO commands will only operate as BL16, ignoring the burst length selected by MR1 OP[1:0].



## Figure 27. MPC [Write FIFO] Operation: tWPRE=2nCK, tWPST=0.5nCK


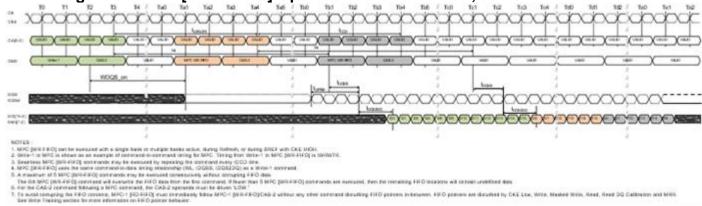


Figure 28. MPC [RD FIFO] Read Operation: tWPRE=2nCK, tWPST=0.5nCK, tRPRE=toggling, tRPST=1.5nCK

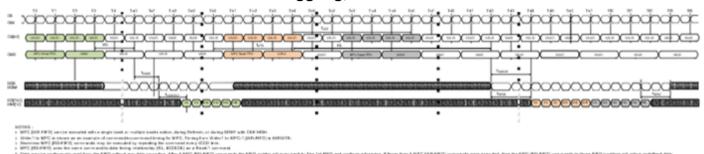


1. Data may be exhibited and from the PPO without any data computes. After 1 NPC (PD PPO) commands the PPO point off way bank to Tim full RPO and contour advantage. Flower than 1 NPC (RRPPO) commands are seemed, from the NPC (PD PPO) commands in these PPO point and when another and the NPC (PD PPO) commands are seemed. The NPC (PD PPO) commands in the NPC (PD PPO) commands are seemed. The NPC (PD PPO) commands are seemed.

DM (1.4) signate will be deliver if any of WH-DM, PD-DM, or DM is excited in the made registers.

See 10-4x T-string register for more information on DM (settents).

## Figure 29. MPC [RD FIFO] Operation: tRPRE=toggling, tRPST=1.5nCK

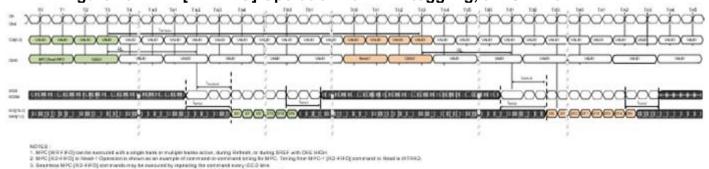

Constraints on the February of the February of the company of the February of

See to Wije Trading service by more entermined on the EPO presentatives.

For the CAS-2 command introducing to MPC command, the CAS-2 operates must be driven NOW."
 FOREY Of speak with the driven if any of MPC-200, RC-200, or ON a construction the mode registers. See Wide Training section for more information on DNS behave.

**Table 28. Timing Constraints for Training Commands** 

<b>Previous Command</b>	Next Command	Minimum Delay	Unit	Note
	MPC [WR FIFO]	tWRWTR	nCK	1
WR/MWR	MPC [RD FIFO]	Not Allowed	-	2
	MPC [RD DQ Calibration]	WL+RU(tDQSS(max)/tCK) +BL/2+RU(tWTR/tCK)	nCK	
	MPC [WR FIFO]	tRTRRD	nCK	3
RD/MRR	MPC [RD FIFO]	Not Allowed	-	2
	MPC [RD DQ Calibration]	tRTRRD	nCK	3
	WR/MWR	Not Allowed	-	2
	MPC [WR FIFO]	tCCD	nCK	
MPC	RD/MRR	Not Allowed	-	2
[WR FIFO]	MPC [RD FIFO]	WL+RU(tDQSS(max)/tCK) +BL/2+RU(tWTR/tCK)	nCK	
	MPC [RD DQ Calibration]	Not Allowed	-	2
	WR/MWR	tRTRRD	nCK	3
	MPC [WR FIFO]	tRTW	-	4
MPC	RD/MRR	tRTRRD	nCK	3
[RD FIFO]	MPC [RD FIFO]	tCCD	nCK	
	MPC [RD DQ Calibration]	tRTRRD	nCK	3
	WR/MWR	tRTRRD	nCK	3
	MPC [WR FIFO]	tRTRRD	nCK	3
MPC	RD/MRR	tRTRRD	nCK	3
[RD DQ Calibration]	MPC [RD FIFO]	Not Allowed	-	2
N. C.	MPC [RD DQ Calibration]	tCCD	nCK	

- tWRWTR = WL + BL/2 + RU(tDQSS(max)/tCK) + max(RU(7.5ns/tCK),8nCK)
   No commands are allowed between MPC [WR FIFO] and MPC-1 [RD FIFO] except MRW commands related to training parameters.
- 3. tRTRRD = RL + RU(tDQSCK(max)/tCK) + BL/2 + RD(tRPST) + max(RU(7.5ns/tCK),8nCK)
- 4. tRTW:
  - In Case of DQ ODT Disable MR11 OP[2:0] = 000B:
  - RL+RU(tDQSCK(max)/ tCK) +BL/2- WL+tWPRE+RD(tRPST)


  - In Case of DQ ODT Enable MR11 OP[2:0] ≠ 000B: RL + RU(tDQSCK(max)/tCK) + BL/2 + RD(tRPST) ODTLon RD(tODTon,min/tCK) + 1



## **VREF Current Generator (VRCG)**

LPDDR4 SDRAM VREF current generators (VRCG) incorporate a high current mode to reduce the settling time of the internal VREF(DQ) and VREF(CA) levels during training and when changing frequency set points during operation. The high current mode is enabled by setting MR13[OP3] = 1. Only Deselect commands may be issued until tVRCG\_ENABLE is satisfied. tVRCG\_ENABLE timing is shown below.

VRCG high current mode is disabled by setting MR13[OP3] = 0. Only Deselect commands may be issued until tVRCG\_DISABLE is satisfied. tVRCG\_DISABLE timing is shown below.

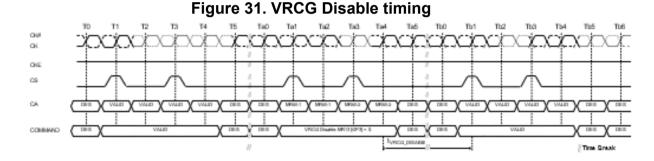

Note that LPDDR4 SDRAM devices support VREF(CA) and VREF(DQ) range and value changes without enabling VRCG high current mode.

Table 29. VRCG Enable/Disable Timing

Symbol	Parameter	Min	Max	Unit
tVRCG_ENABLE	VREF high current mode enable time	-	200	ns
tVRCG_DISABLE	VREF high current mode disable time	-	100	ns



# **CA VREF Training**

The DRAM internal CA VREF specification parameters are voltage operating range, step size, VREF set tolerance, VREF step time and VREF valid level.

The voltage operating range specifies the minimum required VREF setting range for LPDDR4 DRAM devices. The minimum range is defined by VREFmax and VREFmin.

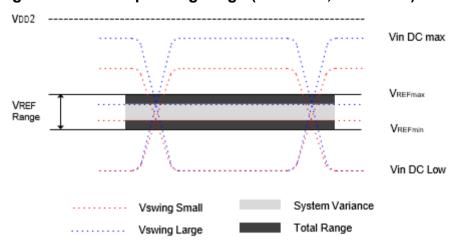


Figure 32. VREF operating range (VREFmin, VREFmax)

The VREF step size is defined as the step size between adjacent steps. However, for a given design, the device has one value for VREF step size that falls within the range.

The VREF set tolerance is the variation in the VREF voltage from the ideal setting. This accounts for accumulated error over multiple steps. There are two ranges for VREF set tolerance uncertainty. The range of VREF set tolerance uncertainty is a function of number of steps n.

The VREF set tolerance is measured with respect to the ideal line which is based on the two endpoints. Where the endpoints are at the min and max VREF values for a specified range

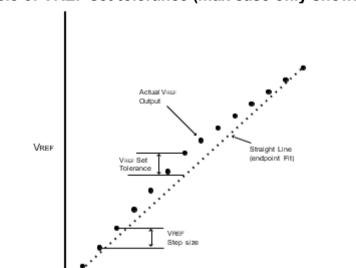


Figure 33. Example of VREF set tolerance (max case only shown) and step size

Digital Code

The VREF increment/decrement step times are define by VREF\_time-short, Middle and long. The VREF\_time- short, VREF\_time-Middle and VREF\_time-long is defined from TS to TE as shown below, where TE is referenced to when the VREF voltage is at the final DC level within the VREF valid tolerance(VREF\_val\_tol).

The VREF valid level is defined by VREF\_val tolerance to qualify the step time TE (see the following figures). This parameter is used to insure an adequate RC time constant behavior of the voltage level change after any VREF increment/decrement adjustment. This parameter is only applicable for DRAM component level validation/characterization.


VREF time-Short is for a single step size increment/decrement change in VREF voltage.

VREF\_time-Middle is at least 2 step sizes increment/decrement change within the same VREFCA range in VREF voltage.

VREF\_time-Long is the time including up to VREFmin to VREFmax or VREFmax to VREFmin change across the VREFCA Range in VREF voltage.

TS - is referenced to MRS command clock

TE - is referenced to the VREF val tol

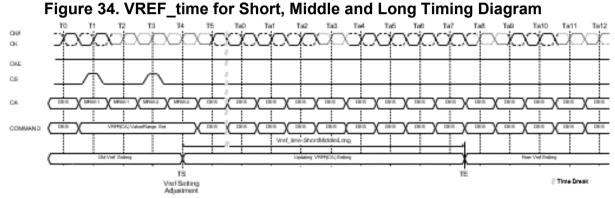

The MRW command to the mode register bits are as follows.

MR12 OP[5:0] : VREF(CA) Setting MR12 OP[6] : VREF(CA) Range

The minimum time required between two VREF MRS commands is VREF\_time-short for single step and VREF\_time-Middle for a full voltage range step.

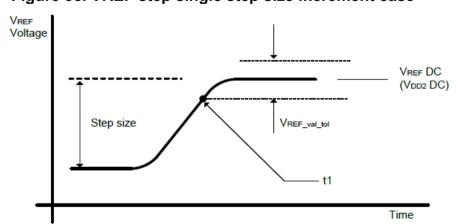


Figure 35. VREF step single step size increment case

Figure 36. VREF step single step size decrement case

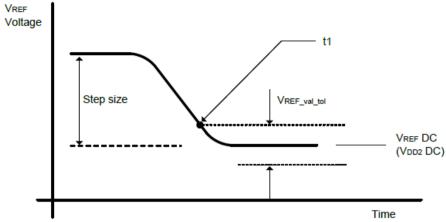


Figure 37. VREF full step from VREFmin to VREFmax case


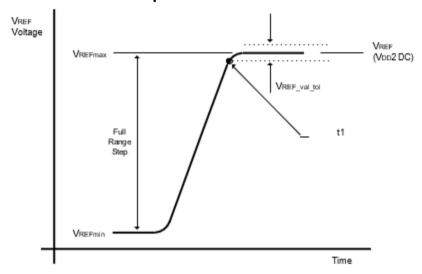


Figure 38. VREF full step from VREFmax to VREFmin case

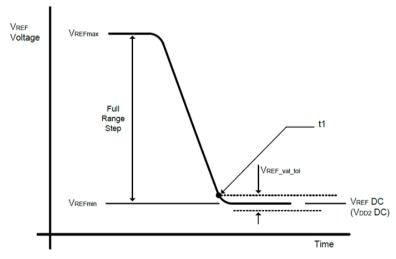

The following table contains the CA internal VREF specification that will be characterized at the component level for compliance.

Table 30. CA Internal VREF Specifications

Symbol	Parameter	Min	Тур	Max	Unit	Note
VREF_max_R0	VREF Max operating point Range0	-	-	30%	VDD2	1,11
VREF_min_R0	VREF Min operating point Range0	10%	-	-	VDD2	1,11
VREF_max_R1	VREF Max operating point Range1	-	-	42%	VDD2	1,11
VREF_min_R1	VREF Min operating point Range1	22%	-	-	VDD2	1,11
VREF_step	VREF Step size	0.3%	0.4%	0.5%	VDD2	2
VREF set tol	VREF Set Tolerance	-1%	0%	1%	VDD2	3,4,6
VKEF_Set_tol	VREF Set Tolerance	-0.1%	0%	0.1%	VDD2	3,5,7
VREF_time_Short		-	-	100	ns	8
VREF_time_Middle	VREF Step Time	-	-	200	ns	12
VREF_time_Long	VREF Step Time	-	-	250	ns	9
VREF_time_weak		-	-	1	ms	13,14
VREF_val_tol	VREF Valid tolerance	-0.1%	0%	0.1%	VDD2	10

- 1. VREF DC voltage referenced to VDD2 DC.
- 2. VREF stepsize increment/decrement range. VREF at DC level.
- 3. VREF new = VREF old + n x VREF step; n= number of steps; if increment use "+"; if decrement use "-".
- 4. The minimum value of VREF setting tolerance = VREF\_new 1.0% x VDD2. The maximum value of VREF setting tolerance = VREF new + 1.0% x VDD2. For n>4.
- 5. The minimum value of VREF setting tolerance = VREF\_new 0.1% x VDD2. The maximum value of VREF setting tolerance = VREF new + 0.1% x VDD2. For n≤ 4.
- 6. Measured by recording the min and max values of the VREF output over the range, drawing a straight line between those points and comparing all other VREF output settings to that line.
- 7. Measured by recording the min and max values of the VREF output across 4 consecutive steps(n=4), drawing a straight line between those points and comparing all other VREF output settings to that line.
- 8. Time from MRS command to increment or decrement one step size for VREF.
- 9. Time from MRS command to increment or decrement VREFmin to VREFmax or VREFmax to VREFmin change across the VREFCA Range in VREF voltage.
- 10. Only applicable for DRAM component level test/characterization purpose. Not applicable for normal mode of operation. VREF valid is to qualify the step times which will be characterized at the component level.
- 11. DRAM range 0 or 1 set by MR12 OP[6].
- 12. Time from MRS command to increment or decrement more than one step size up to a full range of VREF voltage withiin the same VREFCA range.
- 13. Applies when VRCĞ high current mode is not enabled, specified by MR13[OP3] = 0.
- 14. VREF\_time\_weak covers all VREF(CA) Range and Value change conditions are applied to VREF\_time\_Short/Middle/Long.



# **DQ VREF Training**

The DRAM internal DQ VREF specification parameters are voltage operating range, step size, VREF set tolerance, VREF step time and VREFvalid level.

The voltage operating range specifies the minimum required VREF setting range for LPDDR4 DRAM devices. The minimum range is defined by VREFmax and VREFmin.

VREF Range

Vin DC max

VREF Range

VREFmin

VREFmin

Vin DC Low

Vswing Small

Vswing Large

Total Range

Figure 39. VREF operating range (VREFmin, VREFmax)

The VREF step size is defined as the step size between adjacent steps. However, for a given design, the device has one value for VREF step size that falls within the range.

The VREF set tolerance is the variation in the VREF voltage from the ideal setting. This accounts for accumulated error over multiple steps. There are two ranges for VREF set tolerance uncertainty. The range of VREF set tolerance uncertainty is a function of number of steps n.

The VREF set tolerance is measured with respect to the ideal line which is based on the two endpoints. Where the endpoints are at the min and max VREF values for a specified range.

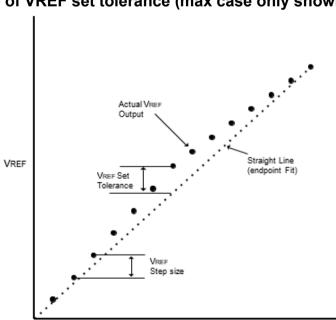


Figure 40. Example of VREF set tolerance (max case only shown) and step size

Digital Code

The VREF increment/decrement step times are define by VREF\_time-short, Middle and long. The VREF\_time- short, VREF\_time-Middle and VREF\_time-long is defined from TS to TE as shown below, where TE is referenced to when the VREF voltage is at the final DC level within the VREF valid tolerance(VREF\_val\_tol).

The VREF valid level is defined by VREF\_val tolerance to qualify the step time TE (see the following figures). This parameter is used to insure an adequate RC time constant behavior of the voltage level change after any VREF increment/decrement adjustment. This parameter is only applicable for DRAM component level validation/characterization.

VREF time-Short is for a single step size increment/decrement change in VREF voltage.


VREF\_time-Middle is at least 2 step sizes increment/decrement change within the same VREFCA range in VREF voltage.

VREF\_time-Long is the time including up to VREFmin to VREFmax or VREFmax to VREFmin change across the VREFCA Range in VREF voltage.

TS - is referenced to MRS command clock

TE - is referenced to the VREF val tol.

MR14 OP[6]: VREF(DQ) Range

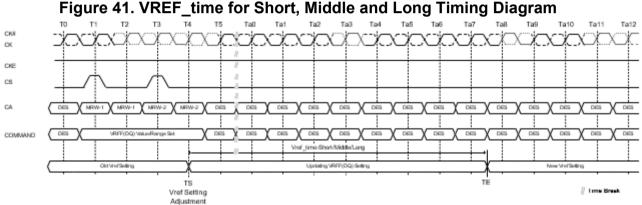

The MRW command to the mode register bits are as follows. MR14 OP[5:0]: VREF(DQ) Setting

The minimum time required between two VREF MRS commands is VREF\_time-short for single step and VREF\_time-Middle for a full voltage range step.

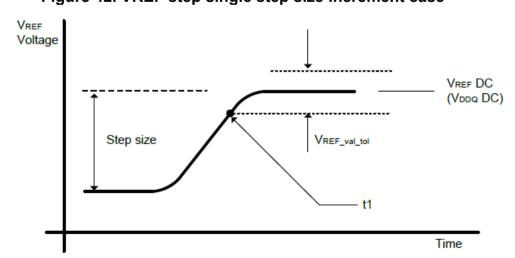


Figure 42. VREF step single step size increment case

Figure 43. VREF step single step size decrement case

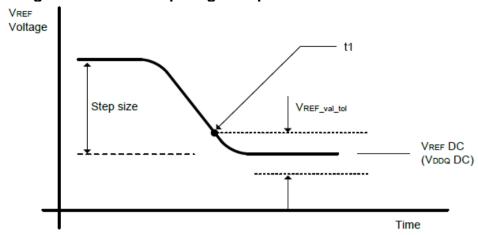


Figure 44. VREF full step from VREFmin to VREFmax case


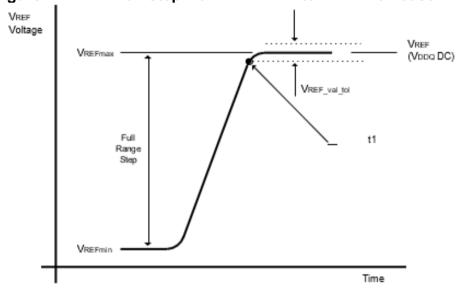


Figure 45. VREF full step from VREFmax to VREFmin case

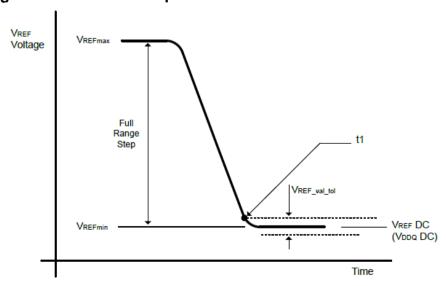

The following table contains the DQ internal VREF specification that will be characterized at the component level for compliance.

**Table 31. DQ Internal VREF Specifications** 

Symbol	Parameter	Min	Тур	Max	Unit	Note
VREF_max_R0	VREF Max operating point Range0	-	-	30%	VDDQ	1,11
VREF_min_R0	VREF Min operating point Range0	10%	-	-	VDDQ	1,11
VREF_max_R1	VREF Max operating point Range1	-	-	42%	VDDQ	1,11
VREF_min_R1	VREF Min operating point Range1	22%	-	-	VDDQ	1,11
VREF_step	VREF Step size	0.3%	0.4%	0.5%	VDDQ	2
VREF set tol	VREF Set Tolerance	-1%	0%	1%	VDDQ	3,4,6
VKEF_Set_tol	VREF Set Tolerance	-0.1%	0%	0.1%	VDDQ	3,5,7
VREF_time_Short		-	-	100	ns	8
VREF_time_Middle	VREF Step Time	-	-	200	ns	12
VREF_time_Long	VKEF Step Tillle	-	-	250	ns	9
VREF_time_weak		-	-	1	ms	13,14
VREF_val_tol	VREF Valid tolerance	-0.1%	0%	0.1%	VDDQ	10

- 1. VREF DC voltage referenced to VDDQ DC.
- 2. VREF stepsize increment/decrement range. VREF at DC level.
- 3. VREF new = VREF old + n x VREF step; n= number of steps; if increment use "+"; if decrement use "-".
- 4. The minimum value of VREF setting tolerance = VREF\_new 1.0% x VDDQ. The maximum value of VREF setting tolerance = VREF new + 1.0% x VDDQ. For n>4.
- 5. The minimum value of VREF setting tolerance = VREF\_new 0.1% x VDDQ. The maximum value of VREF setting tolerance = VREF new + 0.1% x VDDQ. For n≤ 4.
- 6. Measured by recording the min and max values of the VREF output over the range, drawing a straight line between those points and comparing all other VREF output settings to that line.
- 7. Measured by recording the min and max values of the VREF output across 4 consecutive steps(n=4), drawing a straight line between those points and comparing all other VREF output settings to that line.
- 8. Time from MRS command to increment or decrement one step size for VREF.
- 9. Time from MRS command to increment or decrement VREFmin to VREFmax or VREFmax to VREFmin change across the VREFDQ Range in VREF voltage.
- 10. Only applicable for DRAM component level test/characterization purpose. Not applicable for normal mode of operation. VREF valid is to qualify the step times which will be characterized at the component level.
- 11. DRAM range 0 or 1 set by MR14 OP[6].
- 12. Time from MRS command to increment or decrement more than one step size up to a full range of VREF voltage withiin the same VREFDQ range.
- 13. Applies when VRCG high current mode is not enabled, specified by MR13[OP3] = 0.
- 14. VREF\_time\_weak covers all VREF(DQ) Range and Value change conditions are applied to VREF\_time\_Short/Middle/Long.



# **Mode Register Definition**

The table listed below shows the mode registers for LPDDR4 SDRAM. A Mode Register Read command is used to read a mode register. A Mode Register Write command is used to write a mode register.

# **Mode Register Assignment and Definition**

Table below shows the mode registers. Each register is denoted as "R", if it can be read but not written, "W" if it can be written but not read, and "R/W" if it can be read and written. Mode Register Read Command shall be used to read a register. Mode Register Write Command shall be used to write a register.

**Table 32. Mode Register Assignments** 

MR#	OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0				
0	CATR	RFU	RFU	RZ	ZQI	RFU	Latency	Refresh				
1	RPST		nWR (for AP)		RD-PRE	WR-PRE	E	BL				
2	WR Lev	WLS		WL			RL					
3	DBI-WR	DBI-RD		PDDS		PPRP	WR PST	PU-CAL				
4	TUF	Therma	al Offset	PPRE	SR Abort		Refresh Rate					
5				Res	erved							
6				Res	erved							
7				Res	erved							
8	IO V	Vidth		Dei	nsity		Ту	/pe				
9					erved			T				
10				RFU		T		ZQ-Reset				
11	Reserved		CA ODT		Reserved		DQ ODT					
12	RFU	VR-CA	ļ			F(CA)	1	T				
13	FSP-OP	FSP-WR	DMD	RRO	VRCG	VRO	RPT	CBT				
14	RFU	VR(DQ)				F(DQ)						
15			Lower-		ister for DQ Cal	ibration						
16					ank Mask							
17					ment Mask							
18					or Count - LSB							
19					or Count - MSB	!! 4!						
20 21			Upper-		jister for DQ Cal FU	ibration						
22	RF		ODTD-CA	ODTE-CS	ODTE-CK	Ι	SOC ODT					
23	INI	-0	l l		er run time settir		300 001					
24	TRR Mode		TRR Mode BAn	QS IIILEI VAI LIIII	Unitd MAC	ig I	MAC Value					
25	THENINGE		THE WOOD DATE	PPR R	esource		WAO Value					
26					FU							
27					FU							
28					FU							
29					FU							
30			Rese		- SDRAM will ig	gnore						
31					FU S	<del>-</del>						
32			DQ C	alibration Patte	rn "A" (default =	5AH)						
33					FU .							
34				R	FU							
35				R	FU							
36				R	FU							
37	RFU											
38					FU							
39					- SDRAM will iç							
40			DQ C	alibration Patte	rn "B" (default =	3CH)						



OP0

OP1

Table 33. MR0 Register Information (MA[5:0] = 00H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0			
CATR	RFU	RFU	R	ZQI	RFU	Latency	Refresh			
Fun	ction	Туре	Operand		Data		Notes			
Refresh Mode			OP[0]		y & modified refre ied refresh mode	esh mode supporte supported	:d			
Latency Mode			OP[1]	0B : Device sup 1B : Reserved	ports normal late	ncy				
RZQI (Built-in Self-Te	st for RZQ)	Read-only	OP[4:3]	01B: ZQ pin ma 10B: ZQ-pin ma 11B: ZQ-pin Sel detected (2		Q or float				
CATR (CA Terminating	OB: CA for this rank is not terminated									

#### Notes:

OP7

1. RZQI MR value, if supported, will be valid after the following sequence:

OP5

a. Completion of MPC ZQCAL Start command to either channel.

OP6

- b. Completion of MPC ZQCAL Latch command to either channel then tZQLAT is satisfied. RZQI value will be lost after Reset.
- 2. If the ZQ-pin is connected to VSSQ to set default calibration, OP[4:3] shall be set to 01B. If the ZQ-pin is not connected to VSSQ, either OP[4:3] = 01B or OP[4:3] = 10B might indicate a ZQ-pin assembly error. It is recommended that the assembly error is corrected.
- In the case of possible assembly error, the LPDDR4-SDRAM device will default to factory trim settings for RON, and will ignore ZQ Calibration commands. In either case, the device may not function as intended.
- 4. If ZQ Self-Test returns OP[4:3] = 11B, the device has detected a resistor connected to the ZQ-pin. However, this result cannot be used to validate the ZQ resistor value or that the ZQ resistor tolerance meets the specified limits (i.e.,  $240\Omega \pm 1\%$ ).
- CATR functionality is Vendor specific. CATR can either indicate the connection status of the ODTCA pad for the die or whether CA for the rank is terminated. Consult the vendor device datasheet for details.

Table 34. MR1 Register Information (MA[5:0] = 01H) OP2

OP3

OP4

RPST		nWR (for AP)		RD-PRE	WR-PRE	BL	
Fund	ction	Type	Operand		Data		Notes
BL (Burst Length)			OP[1:0]	01B: BL=32 Sec	32 Sequential (on	-the-fly)	1
WR-PRE (WR Pre-amble	Length)		OP[2]	0B: Reserved 1B: WR Pre-am	ble = 2 x tCK		5,6
RD-PRE (RD Pre-amble	Type)		OP[3]	0B: RD Pre-aml 1B: RD Pre-aml	ole = Static (defau ole = Toggle	ult)	3,5,6
nWR (Write-Recovery Precharge com		Write-only	OP[6:4]	000B: nWR = 6 001B: nWR = 11 010B: nWR = 11 011B: nWR = 20 100B: nWR = 20 101B: nWR = 30 111B: nWR = 40	ò , , , , , , , , , , , , , , , , , , ,		2,5,6
RPST (RD Post-Amble	e Length)		OP[7]	0B: RD Post-an 1B: RD Post-an	nble = 0.5 x tCK ( nble = 1.5 x tCK	default)	4,5,6

- 1. Burst length on-the-fly can be set to either BL=16 or BL=32 by setting the "BL" bit in the command operands. See the Command Truth Table.
- The programmed value of nWR is the number of clock cycles the LPDDR4-SDRAM device uses to determine the starting point of an internal Precharge operation after a Write burst with AP (auto-precharge) enabled.
- 3. For Read operations this bit must be set to select between a "toggling" pre-amble and a "Non-toggling" Pre-amble.
- OP[7] provides an optional READ post-amble with an additional rising and falling edge of DQS. The optional postamble cycle is provided for the benefit of certain memory controllers.
- There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read from with an MRR command to this address.
- There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.



Table 35, Burst Sequence for Read

								.,	<u> </u>	iC		<u> </u>	_	41 \	<u>,,                                   </u>	<u> </u>	<u>'Ч</u>	uv	,,,,,	<u> </u>		<u> </u>	,	<i>,</i> u	<u>ч</u>													
Burst	Burst	C4	Co	Co	C1	CO								В	Bur	st C	ус	le N	Nun	nbe	er a	nd	Bu	rst	Αd	dre	SS	Se	que	nc	е							
Length	Type	C4	CS	C2	CI	CU	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
		٧	0	0	0	0	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	Ε	F																
16	SEQ	V	0	1	0	0	4	5	6	7	8	9	Α	В	С	D	Е	F	0	1	2	3																
10	SEQ	٧	1	0	0	0	8	9	Α	В	С	D	Ε	F	0	1	2	3	4	5	6	7																
		٧	1	1	0	0	С	D	Ε	F	0	1	2	3	4	5	6	7	8	9	Α	В																
		0	0	0	0	0	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	Ε	F	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F
		0	0	1	0	0	4	5	6	7	8	9	Α	В	С	D	Е	F	0	1	2	3	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	10	11	12	13
		0	1	0	0	0	8	9	Α	В	С	D	Ε	F	0	1	2	3	4	5	6	7	18	19	1A	1B	1C	1D	1E	1F	10	11	12	13	14	15	16	17
32	SEQ	0	1	1	0	0	С	D	Ε	F	0	1	2	3	4	5	6	7	8	9	Α	В	1C	1D	1E	1F	10	11	12	13	14	15	16	17	18	19	1A	1B
32	SEQ	1	0	0	0	0	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	Ε	F
		1	0	1	0	0	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	10	11	12	13	4	5	6	7	8	9	Α	В	С	D	Ε	F	0	1	2	3
		1	1	0	0	0	18	19	1A	1B	1C	1D	1E	1F	10	11	12	13	14	15	16	17	8	9	Α	В	С	D	Ε	F	0	1	2	3	4	5	6	7
		1	1	1	0	0	1C	1D	1E	1F	10	11	12	13	14	15	16	17	18	19	1A	1B	O	D	ш	F	0	1	2	ფ	4	5	6	7	8	9	Α	В

## Notes:

- 1. C0-C1 are assumed to be '0', and are not transmitted on the command bus.
- 2. The starting burst address is on 64-bit (4n) boundaries.

Table 36. Burst Sequence for Write

								- '						•••		_	7					-																
Burst	Burst	C4	Co	3	C4	<b>C</b> 0				Burst Cycle Number and Burst Address Sequence																												
Length	Type	C4	CS	C2	Ci	CU	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
16	SEQ	٧	0	0	0	0	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	Е	F																
32	SEQ	0	0	0	0	0	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F	10	11	12	13	14	15	16	17	18	19	1A	1B	10	1D	1E	1F

- 1. C0-C1 are assumed to be '0', and are not transmitted on the command bus.
- The starting address is on 256-bit (16n) boundaries for Burst length 16.
   The starting address is on 512-bit (32n) boundaries for Burst length 32.
- 4. C2-C3 shall be set to '0' for all Write operations.

Table 37. MR2 Register Information (MAI5:01 = 02H)

OP7	OP6	OP5	OP4	OP3	OP2	ÓP1	OP0
WR Lev	WLS		WL			RL	

Function	Туре	Operand	Data	Notes
RL (Read latency)		OP[2:0]	RL & nRTP for DBI-RD Disabled (MR3 OP[6]=0B)  000B: RL=6, nRTP = 8 (Default)  001B: RL=10, nRTP = 8  010B: RL=14, nRTP = 8  011B: RL=20, nRTP = 8  100B: RL=24, nRTP = 10  101B: RL=28, nRTP = 12  110B: RL=32, nRTP = 14  111B: RL=36, nRTP = 16  RL & nRTP for DBI-RD Enabled (MR3 OP[6]=1B)  000B: RL=6, nRTP = 8  001B: RL=12, nRTP = 8  010B: RL=12, nRTP = 8  011B: RL=22, nRTP = 8  100B: RL=28, nRTP = 10  101B: RL=32, nRTP = 10  101B: RL=36, nRTP = 12  110B: RL=36, nRTP = 12	1,3,4
WL (Write latency)	Write-only	OP[5:3]	WL Set "A" (MR2 OP[6]=0B)  000B: WL=4 (Default)  001B: WL=6  010B: WL=8  011B: WL=10  100B: WL=12  101B: WL=14  110B: WL=16  111B: WL=18  WL Set "B" (MR2 OP[6]=1B)  000B: WL=4  001B: WL=8  010B: WL=12  011B: WL=18  100B: WL=12  111B: WL=18  100B: WL=22  101B: WL=26  110B: WL=30  111B: WL=34	1,3,4
WLS (Write Latency Set)		OP[6]	0B: WL Set "A" (default) 1B: WL Set "B"	1,3,4
WR Lev (Write Leveling)		OP[7]	0B: Disabled (default) 1B: Enabled	2

- See Read and Write Latencies table for detail.
- 2. After a MRW to set the Write Leveling Enable bit (OP[7]=1B), the device remains in the MRW state until another MRW command clears the bit (OP[7]=0B). No other commands are allowed until the Write Leveling Enable bit is cleared.
- 3. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read from with an MRR command to this address.
- 4. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.



Table	20	Poad	and	Writa	Latencies	
Table	.ეტ.	Read	ano	vvrite	i atencies	

Read L	atency	Write L	atency	nWR	nRTP	Lower Clock Frequency	Upper Clock Frequency	Notes
No DBI	w/DBI	Set A	Set B	HVVF	IIKIP	Limit [MHz]( >)	Limit [MHz]( ≦)	Notes
6	6	4	4	6	8	10	266	
10	12	6	8	10	8	266	533	
14	16	8	12	16	8	533	800	
20	22	10	18	20	8	800	1066	1,2,3, 4,5,6
24	28	12	22	24	10	1066	1333	1,5,5
28	32	14	26	30	12	1333	1600	
32	36	16	30	34	14	1600	1866	

<u>∧n</u>z

- 1. The device should not be operated at a frequency above the Upper Frequency Limit, or below the Lower Frequency Limit, shown for each RL, WL, nRTP, or nWR value.
- 2. DBI for Read operations is enabled in MR3 OP[6]. When MR3 OP[6]=0, then the "No DBI" column should be used for Read Latency. When MR3 OP[6]=1, then the "w/DBI" column should be used for Read Latency.
- 3. Write Latency Set "A" and Set "B" is determined by MR2 OP[6]. When MR2 OP[6]=0, then Write Latency Set "A" should be used. When MR2 OP[6]=1, then Write Latency Set "B" should be used.
- 4. The programmed value of nWR is the number of clock cycles the device uses to determine the starting point of an internal Precharge operation after a Write burst with AP (Auto Pre- charge). It is determined by RU(tWR/tCK).
- 5. The programmed value of nRTP is the number of clock cycles the device uses to determine the starting point of an internal Precharge operation after a Read burst with AP (Auto Pre- charge). It is determined by RU(tRTP/tCK).
- 6. nRTP shown in this table is valid for BL16 only. For BL32, the SDRAM will add 8 clocks to the nRTP value before starting a precharge.

Table 39. MR3 Register Information (MA[5:0] = 03H)

OP/	OP6	OP5	OP4	OP3	OP2	OP1		PU			
DBI-WR	DBI-RD		PDDS		PPRP	WR PST	PL	I-CAL			
Fund	ction	Туре	Operand		Data			Notes			
PU-Cal (Pull-up Calibra	tion Point)		OP[0]	0B: VDDQ/2.5 1B: VDDQ/3 (de	efault)			1,4			
WR PST (WR Post-Ambl	e Length)		OP[1]	0B: WR Post-ar 1B: WR Post-an	nble = 0.5 x tCK ( nble = 1.5 x tCK	(default)		2,3,5			
Post Package R Protection											
PDDS (Pull-Down Driv	e Strength)	Write-only	OP[5:3]	000B: RFU 001B: RZQ/1 010B: RZQ/2 011B: RZQ/3 100B: RZQ/4 101B: RZQ/5 110B: RZQ/6 (d 111B: Reserved	,			1,2,3			
DBI-RD (DBI-Read Enal	ble)		OP[6] 0B: Disabled (default) 1B: Enabled								
DBI-WR (DBI-Write Enat	ole)		OP[7]	0B: Disabled (default) 1B: Enabled							

- 1. All values are "typical". The actual value after calibration will be within the specified tolerance for a given voltage and temperature. Recalibration may be required as voltage and temperature vary.
- There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the
  set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read
  from with an MRR command to this address.
- 3. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.
- 4. For dual channel devices, PU-CAL setting is required as the same value for both Ch.A and Ch.B before issuing ZQ Cal start command.
- 5. 1.5 x tCK apply > 1.6GHz clock.
- 6. If MR3 OP[2] is set to 1b then PPR protection mode is enabled. The PPR Protection bit is a sticky bit and can only be set to 0b by a power on reset. MR4 OP[4] controls entry to PPR Mode. If PPR protection is enabled then DRAM will not allow writing of 1 to MR4 OP[4].



Table 40. MR4 Register Information (MA[5:0] = 04H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0			
TUF	Therma	al Offset	PPRE	SR Abort		Refresh Rate				
Fund	ction	Type	Operand		Data					
Refresh Rate		Read	OP[2:0]	000B: Low temperature operating limit exceeded 001B: 4x refresh 010B: 2x refresh 011B: 1x refresh (default) 100B: 0.5x refresh 101B: 0.25x refresh, no de-rating 110B: 0.25x refresh, with de-rating 111B: High temperature operating limit exceeded						
SR Abort (Self F	Refresh Abort)	Write	OP[3]	0B: Disable (def 1B: Enable	fault)		9			
PPRE (Post-package)	repair entry/exit)	Write	OP[4]	0B: Exit PPR mo	` '		5, 9			
Thermal Offset (Vender Specifi	c Function)	Write	OP[6:5]	00B: No offset, 0~5°C gradient (default) 01B: 5°C offset, 5~10°C gradient 10B: 10°C offset, 10~15°C gradient 11B: Reserved				01B: 5°C offset, 5~10°C gradient 10B: 10°C offset, 10~15°C gradient		
TUF (Temperature U	lpdate Flag)	Read	OP[7]		in OP[2:0] since l OP[2:0] since last	ast MR4 read (defau MR4 read	lt) 6-8			

#### Notes:

- 1. The refresh rate for each MR4-OP[2:0] setting applies to tREFI, tREFIpb, and tREFW. OP[2:0]=011B corresponds to a device temperature of 85 °C. Other values require either a longer (2x, 4x) refresh interval at lower temperatures, or a shorter (0.5x, 0.25x) refresh interval at higher temperatures. If OP[2]=1B, the device temperature is greater than 85 °C.
- At higher temperatures (>85 °C), AC timing derating may be required. If derating is required the LPDDR4- SDRAM will set OP[2:0]=110B.
- DRAM vendors may or may not report all of the possible settings over the operating temperature range of the device. Each
  vendor guarantees that their device will work at any temperature within the range using the refresh interval requested by their
  device.
- 4. The device may not operate properly when OP[2:0]=000B or 111B.
- 5. Post-package repair can be entered or exited by writing to OP[4].
- 6. When OP[7]=1, the refresh rate reported in OP[2:0] has changed since the last MR4 read. A mode register read from MR4 will reset OP[7] to '0'.
- 7. OP[7] = 0 at power-up. OP[2:0] bits are valid after initialization sequence(Te).
- 8. See the section on "temperature Sensor" for information on the recommended frequency of reading MR4.
- 9. OP[6:3] bits that can be written in this register. All other bits will be ignored by the DRAM during a MRW to this register.

# MR5~7 (Reserved) (MA[5:0] = 05H-07H)

Table 41. MR8 Register Information (MA[5:0] = 08H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0		
10	Width		De	ensity		Туре			
Fur	nction	Туре	Operand	Data					
Туре			OP[1:0]	00B: S16 SDRAM (16n pre-fetch) All Others: Reserved					
Density		Read-only	OP[5:2]	0001B: 6Gb dua 0010B: 8Gb dua 0011B: 12Gb du 0100B: 16Gb du 0101B: 24Gb du 0110B: 32Gb du	al channel die / 20 al channel die / 30 al channel die / 40 al channel die / 6 al channel die / 12 al channel die / 16 al channel die / 16 erved	Gb single channe Gb single channe Gb single channe Gb single channe 2Gb single channe Gb single channe	I die I die II die II die II die II die		
IO Width			OP[7:6]	OOR: v16 (per channel)					

MR9 (Reserved) (MA[5:0] = 09H)



Table 42. MR10 Register Information (MA[5:0] = 0AH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	0	P0
			RFU				ZQ-	Reset
Fur	nction	Туре	Operand		Data			Notes
ZQ-Reset		Write-only	OP[0]	0B: Normal Ope 1B: ZQ Reset	eration (Default)			1, 2

## Notes:

- 1. See ZQCal Timing Parameters for calibration latency and timing.
- If the ZQ-pin is connected to VDDQ through RZQ, either the ZQ calibration function or default calibration (via ZQ-Reset) is supported. If the ZQ-pin is connected to VSS, the device operates with default calibration, and ZQ calibra- tion commands are ignored. In both cases, the ZQ connection shall not change after power is applied to the device.

Table 43. MR11 Register Information (MA[5:0] = 0BH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0	
Reserved	eserved CA ODT			Reserved DQ ODT				
Fund	nction Type Operand Data					Notes		
DQ ODT (DQ Bus Receiv Termination)	/er On-Die-	Write-only	OP[2:0]	000B: Disable (I 001B: RZQ/1 010B: RZQ/2 011B: RZQ/3 100B: RZQ/4 101B: RZQ/5 110B: RZQ/6 111B: RFU	Default)		1,2,3	
CA ODT (CA Bus Receiv Termination)	ver On-Die-	vviile-oriiy	OP[6:4]	000B: Disable (I 001B: RZQ/1 010B: RZQ/2 011B: RZQ/3 100B: RZQ/4 101B: RZQ/5 110B: RZQ/6 111B: RFU	Default)		1,2,3	

- 1. All values are "typical". The actual value after calibration will be within the specified tolerance for a given voltage and temperature. Recalibration may be required as voltage and temperature vary.
- There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the
  set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read
  from with an MRR command to this address.
- 3. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.



Table 44. MR12 Register Information (MA[5:0] = 0CH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
RFU	VR-CA						
Fun	ction	Type Operand Data				Notes	
VREF(CA) (VREF(CA) Set	VREF(CA) (VREF(CA) Setting)		OP[5:0]	000000B - 1100 All Others: Res	1,2,3, 5,6		
VR-CA (VREF(CA) Ra	nge)	Read / Write	OP[6] 0B: VREF(CA) Range[0] enabled 1B: VREF(CA) Range[1] enabled (default)		l (default)	1,2,4, 5,6	

#### Notes:

- 1. This register controls the VREF(CA) levels. Refer to VREF Settings for Range[0] and Range[1] for actual voltage of VREF(CA).
- 2. A read to this register places the contents of OP[7:0] on DQ[7:0]. Any RFU bits and unused DQ's shall be set to '0'. See the section on MRR Operation.
- A write to OP[5:0] sets the internal VREF(CA) level for FSP[0] when MR13 OP[6]=0B, or sets FSP[1] when MR13 OP[6]=1B. The time
  required for VREF(CA) to reach the set level depends on the step size from the current level to the new level. See the section on VREF(CA)
  training for more information
- 4. A write to OP[6] switches the LPDDR4-SDRAM between two internal VREF(CA) ranges. The range (Range[0] or Range[1]) must be selected when setting the VREF(CA) register. The value, once set, will be retained until overwritten, or until the next power-on or RESET event.
- 5. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read from with an MRR command to this address.
- 6. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.

Table 45. VREF Settings for Range[0] and Range[1]

Function	Operand	Range[0] Valu	es (% of VDD2)	Range[1] Value	es (% of VDD2)	Notes
		000000B: 10.0%	011010B: 20.4%	000000B: 22.0%	011010B: 32.4%	
		000001B: 10.4%	011011B: 20.8%	000001B: 22.4%	011011B: 32.8%	
		000010B: 10.8%	011100B: 21.2%	000010B: 22.8%	011100B: 33.2%	
		000011B: 11.2%	011101B: 21.6%	000011B: 23.2%	011101B: 33.6%	
		000100B: 11.6%	011110B: 22.0%	000100B: 23.6%	011110B: 34.0%	
		000101B: 12.0%	011111B: 22.4%	000101B: 24.0%	011111B: 34.4%	
		000110B: 12.4%	100000B: 22.8%	000110B: 24.4%	100000B: 34.8%	
		000111B: 12.8%	100001B: 23.2%	000111B: 24.8%	100001B: 35.2%	
		001000B: 13.2%	100010B: 23.6%	001000B: 25.2%	100010B: 35.6%	
		001001B: 13.6%	100011B: 24.0%	001001B: 25.6%	100011B: 36.0%	
		001010B: 14.0%	100100B: 24.4%	001010B: 26.0%	100100B: 36.4%	
		001011B: 14.4%	100101B: 24.8%	001011B: 26.4%	100101B: 36.8%	
VREF	OD[E-0]	001100B: 14.8%	100110B: 25.2%	001100B: 26.8%	100110B: 37.2%	400
Settings for MR12	OP[5:0]	001101B: 15.2%	100111B: 25.6%	001101B: 27.2% (Default)	100111B: 37.6%	1,2,3
W V.I.Z		001110B: 15.6%	101000B: 26.0%	001110B: 27.6%	101000B: 38.0%	
		001111B: 16.0%	101001B: 26.4%	001111B: 28.0%	101001B: 38.4%	
		010000B: 16.4%	101010B: 26.8%	010000B: 28.4%	101010B: 38.8%	
		010001B: 16.8%	101011B: 27.2%	010001B: 28.8%	101011B: 39.2%	
		010010B: 17.2%	101100B: 27.6%	010010B: 29.2%	101100B: 39.6%	
		010011B: 17.6%	101101B: 28.0%	010011B: 29.6%	101101B: 40.0%	
		010100B: 18.0%	101110B: 28.4%	010100B: 30.0%	101110B: 40.4%	
		010101B: 18.4%	101111B: 28.8%	010101B: 30.4%	101111B: 40.8%	
		010110B: 18.8%	110000B: 29.2%	010110B: 30.8%	110000B: 41.2%	
		010111B: 19.2%	110001B: 29.6%	010111B: 31.2%	110001B: 41.6%	
		011000B: 19.6%	110010B: 30.0%	011000B: 31.6%	110010B: 42.0%	
		011001B: 20.0%	All Others: Reserved	011001B: 32.0%	All Others: Reserved	

- These values may be used for MR12 OP[5:0] to set the VREF(CA) levels in the LPDDR4-SDRAM.
- 2. The range may be selected in the MR12 register by setting OP[6] appropriately.
- The MR12 registers represents either FSP[0] or FSP[1]. Two frequency-set-points each for CA and DQ are provided to allow for faster switching between terminated and un-terminated operation, or between different high fre- quency setting which may use different terminations values.



Table 46. MR13 Register Information (MA[5:0] = 0DH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	C	)PU
FSP-OP	FSP-WR	DMD	RRO	VRCG	VRO	RPT	(	CBT
Fund	ction	Туре	Operand	Data				Notes
CBT (Command Bus	Training)		OP[0]	0B: Normal Operation (default) 1B: Command Bus Training Mode Enabled				1
RPT (Read Preamble	ad Preamble Training)		OP[1]	0B: Disable (det 1B: Enable				
VRO (VREF Output)			OP[2]	OB: Normal operation (default)  1B: Output the VREF(CA) and VREF(DQ) values on DQ bits				2
VRCG (VREF Current	Generator)		OP[3]	0B: Normal Ope 1B: VREF Fast	eration (default) Response (high o	current) mode		3
RRO Refresh rate op	tion	Write-only	OP[4]		les 001 and 010 i odes in MR4 OP			4, 5
DMD (Data Mask Dis	able)		OP[5]		Operation Enable Operation Disable			6
FSP-WR (Frequency Set Write/Read)	Point		OP[6]	0B: Frequency-Set-Point[0] (default) 1B: Frequency-Set-Point [1]				7
FSP-OP (Frequency Set Operation Mode			OP[7]	0B: Frequency- 1B: Frequency-	Set-Point[0] (defa Set-Point [1]	ult)		8

- 1. A write to set OP[0]=1 causes the LPDDR4-SDRAM to enter the Command Bus Training mode. When OP[0]=1 and CKE goes LOW, commands are ignored and the contents of CA[5:0] are mapped to the DQ bus. CKE must be brought HIGH before doing a MRW to clear this bit (OP[0]=0) and return to normal operation. See the Command Bus Training section for more information.
- 2. When set, the LPDDR4-SDRAM will output the VREF(CA) and VREF(D) voltages on DQ pins. Only the "active" frequency-set-point, as defined by MR13 OP[7], will be output on the DQ pins. This function allows an external test system to measure the internal VREF levels. The DQ pins used for VREF output are vendor specific.
- 3. When OP[3]=1, the VREF circuit uses a high-current mode to improve VREF settling time.
- 4. MR13 OP4 RRO bit is valid only when MR0 OP0 = 1. For LPDDR4 devices with MR0 OP0 = 0, MR4 OP[2:0] bits are not dependent on MR13 OP4
- 5. When OP[4] = 0, only 001b and 010b in MR4 OP[2:0] are disabled. LPDDR4 devices must report 011b instead of 001b or 010b in this case. Controller should follow the refresh mode reported by MR4 OP[2:0], regardless of RRO setting. TCSR function does not depend on RRO setting.
- 6. When enabled (OP[5]=0B) data masking is enabled for the device. When disabled (OP[5]=1B), masked write command is illegal. See LPDDR4 Data Mask (DM) and Data Bus Inversion (DBIdc) Function.
- FSP-WR determines which frequency-set-point registers are accessed with MRW commands for the following functions such as VREF(CA) Setting, VREF(CA) Range, VREF(DQ) Setting, VREF(DQ) Range. For more information, refer to Frequency Set Point section
- 8. FSP-OP determines which frequency-set-point register values are currently used to specify device operation for the following functions such as VREF(CA) Setting, VREF(CA) Range, VREF(DQ) Setting, VREF(DQ) Range. For more information, refer to Frequency Set Point section.



Table 47. MR14 Register Information (MA[5:0] = 0EH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0			
RFU	VR(DQ)			VREF(DQ)						
Fund	ction	Туре	Operand	perand Data						
VREF(DQ) (VREF(DQ) Set	VREF(DQ) (VREF(DQ) Setting)		OP[5:0]	000000B - 110 All Others: Res	elow	1,2,3, 5,6				
VR(DQ) (VREF(DQ) Ra	nge)	Read / Write	OP[6]	0B: VREF(DQ) 1B: VREF(DQ)	1,2,4, 5,6					

#### Notes:

- This register controls the VREF(DQ) levels for Frequency-Set-Point[1:0]. Values from either VR(DQ)[0] or VR(dq)[1] may be selected by setting OP[6] appropriately.
- 2. A read (MRR) to this register places the contents of OP[7:0] on DQ[7:0]. Any RFU bits and unused DQ's shall be set to 0'. See the MRR Operation section.
- A write to OP[5:0] sets the internal VREF(DQ) level for FSP[0] when MR13 OP[6]=0B, or sets FSP[1] when MR13 OP[6]=1B. The time
  required for VREF(DQ) to reach the set level depends on the step size from the current level to the new level. See the VREF(DQ) training
  section.
- 4. A write to OP[6] switches the LPDDR4-SDRAM between two internal VREF(DQ) ranges. The range (Range[0] or Range[1]) must be selected when setting the VREF(DQ) register. The value, once set, will be retained until overwritten, or until the next power-on or RESET event.
- 5. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address or read from with an MRR command to this address.
- 6. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device and may be changed without affecting device operation.

Table 48. VREF Settings for Range[0] and Range[1]

Function	Operand	Range[0] Valu	es (% of VDDQ)	Range[1] Value	s (% of VDDQ)	Notes
		000000B: 10.0%	011010B: 20.4%	000000B: 22.0%	011010B: 32.4%	
		000001B: 10.4%	011011B: 20.8%	000001B: 22.4%	011011B: 32.8%	
		000010B: 10.8%	011100B: 21.2%	000010B: 22.8%	011100B: 33.2%	
		000011B: 11.2%	011101B: 21.6%	000011B: 23.2%	011101B: 33.6%	
		000100B: 11.6%	011110B: 22.0%	000100B: 23.6%	011110B: 34.0%	
		000101B: 12.0%	011111B: 22.4%	000101B: 24.0%	011111B: 34.4%	
		000110B: 12.4%	100000B: 22.8%	000110B: 24.4%	100000B: 34.8%	
		000111B: 12.8%	100001B: 23.2%	000111B: 24.8%	100001B: 35.2%	
		001000B: 13.2%	100010B: 23.6%	001000B: 25.2%	100010B: 35.6%	
		001001B: 13.6%	100011B: 24.0%	001001B: 25.6%	100011B: 36.0%	
		001010B: 14.0%	100100B: 24.4%	001010B: 26.0%	100100B: 36.4%	
		001011B: 14.4%	100101B: 24.8%	001011B: 26.4%	100101B: 36.8%	
VREF	OD[E-0]	001100B: 14.8%	100110B: 25.2%	001100B: 26.8%	100110B: 37.2%	400
Settings for MR14	OP[5:0]	001101B: 15.2%	100111B: 25.6%	001101B: 27.2% (Default)	100111B: 37.6%	1,2,3
IVII ( )		001110B: 15.6%	101000B: 26.0%	001110B: 27.6%	101000B: 38.0%	
		001111B: 16.0%	101001B: 26.4%	001111B: 28.0%	101001B: 38.4%	
		010000B: 16.4%	101010B: 26.8%	010000B: 28.4%	101010B: 38.8%	
		010001B: 16.8%	101011B: 27.2%	010001B: 28.8%	101011B: 39.2%	
		010010B: 17.2%	101100B: 27.6%	010010B: 29.2%	101100B: 39.6%	
		010011B: 17.6%	101101B: 28.0%	010011B: 29.6%	101101B: 40.0%	
		010100B: 18.0%	101110B: 28.4%	010100B: 30.0%	101110B: 40.4%	
		010101B: 18.4%	101111B: 28.8%	010101B: 30.4%	101111B: 40.8%	
		010110B: 18.8%	110000B: 29.2%	010110B: 30.8%	110000B: 41.2%	
		010111B: 19.2%	110001B: 29.6%	010111B: 31.2%	110001B: 41.6%	
		011000B: 19.6%	110010B: 30.0%	011000B: 31.6%	110010B: 42.0%	
		011001B: 20.0%	All Others: Reserved	011001B: 32.0%	All Others: Reserved	

- 1. These values may be used for MR14 OP[5:0] to set the VREF(DQ) levels in the LPDDR4-SDRAM.
- 2. The range may be selected in the MR14 register by setting OP[6] appropriately.
- The MR14 registers represents either FSP[0] or FSP[1]. Two frequency-set-points each for CA and DQ are provided to allow for faster switching between terminated and un-terminated operation, or between different high frequency setting which may use different terminations values.



Table 49. MR15 Register Information (MA[5:0] = 0FH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0		
Lower-Byte Invert Register for DQ Calibration									
Fun	ction	Туре	Operand		Data		Notes		
Lower-Byte Inv		Write-only	OP[7:0]	OP[7:0], and w locations DQ[7 0B: Do not inve	Q Calibration pat	e corresponding I nne:	DQ 1,2,3		

#### Notes:

- This register will invert the DQ Calibration pattern found in MR32 and MR40 for any single DQ, or any combination of DQ's. Example: If MR15 OP[7:0]=00010101B, then the DQ Calibration patterns transmitted on DQ[7,6,5,3,1] will not be inverted, but the DQ Calibration patterns transmitted on DQ[4,2,0] will be inverted.

  2. DMI[0] is not inverted, and always transmits the "true" data contained in MR32/MR40.

  3. No Data Bus Inversion (DBI) function is enacted during DQ Read Calibration, even if DBI is enabled in MR3-OP[6].

Table 50. MR15 Invert Register Pin Mapping

PIN	DQ0	DQ1	DQ2	DQ3	DMI0	DQ4	DQ5	DQ6	DQ7
MR15	OP0	OP1	OP2	OP3	NO-Invert	OP4	OP5	OP6	OP7



Table 51. MR16 Register Information (MA[5:0] = 10H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0	
			PASR E	Bank Mask				
Fun	ction	Туре	Operand		Data		Notes	
Bank[7:0] Mask	OB: Bank Petroch enabled (default): Linmasked						1	
	OP[n]		Ban	k Mask		8-Bank SDRA	M	
	0		XXX	xxxx1		Bank 0		
	1		XXX	xxx1x		Bank 1		
	2		XXX	xx1xx				
	3		XXX	x1xxx		Bank 3		
	4		XXX	1xxxx		Bank 4		
	5		xx1	XXXXX		Bank 5		
	6		x1x	XXXXX		Bank 6		
	7		1vv	VVVVV		Rank 7		

#### Notes:

- When a mask bit is asserted (OP[n]=1), refresh to that bank is disabled.
- 2. PASR bank-masking is on a per-channel basis. The two channels on the die may have different bank masking in dual channel devices.

	i abie	52. WR17 R	kegister ini	formation (i	/IA[5:U] = 1	1H)						
OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0					
			PASR Se	gment Mask								
Fun	ction	Type	Operand		Da	ata						
PASR Segmen	nt Mask	Write-only	OP[7:0]	0B: Segment R 1B: Segment R	efresh enabled (d efresh disabled	efault)						
Segment	OP[n]	Segme	nt Mask	8Gb per channel R16:R14								
0	0	xxxx	xxx1		00	0B						
1	1	xxxxxx1x		001B								
2	2	XXXX	cx1xx		01	0B						
3	3	XXXX	<1xxx	011B								
4	4	XXX	1xxxx	100B								
5	5	xx1x	xx1xxxxx		101B					101B		
6	6	x1xx	x1xxxxxx		110B							
7	7	1,00	0000		11	1D						

- 1. This table indicates the range of row addresses in each masked segment. "X" is don't care for a particular seg- ment.
- PASR segment-masking is on a per-channel basis. The two channels on the die may have different segment masking in dual channel

OP7	OP6	OP5	OP4	OP3	OP2	OP1		)PU
			DQS Oscillate	or Count - LSB				
Function Type Operand Data N								Notes
	DQS Oscillator (WR Training DQS Oscillator)		OP[7:0]	0 - 255 LSB DRA	AM DQS Oscillato	or Count		1~3

- MR18 reports the LSB bits of the DRAM DQS Oscillator count. The DRAM DQS Oscillator count value is used to train DQS to the DQ data valid window. The value reported by the DRAM in this mode register can be used by the memory controller to periodically adjust the phase of DQS relative to DQ.
- Both MR18 and MR19 must be read (MRR) and combined to get the value of the DQS Oscillator count.
- A new MPC [Start DQS Oscillator] should be issued to reset the contents of MR18/MR19.



Table 54. MR19 Register Information (MA[5:0] = 13H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0			
	DQS Oscillator Count - MSB									
Fun	ction	Туре	Operand	Data						
	DQS Oscillator (WR Training DQS Oscillator)		OP[7:0]	0 - 255 MSB DRAM DQS Oscillator Count			1~3			

#### Notes:

- MR19 reports the MSB bits of the DRAM DQS Oscillator count. The DRAM DQS Oscillator count value is used to train DQS to the DQ data valid window. The value reported by the DRAM in this mode register can be used by the memory controller to periodically adjust the phase of DQS relative to DQ.
- 2. Both MR18 and MR19 must be read (MRR) and combined to get the value of the DQS Oscillator count.
- 3. A new MPC [Start DQS Oscillator] should be issued to reset the contents of MR18/MR19.

Table 55. MR20 Register Information (MA[5:0] = 14H)

OP7	OP6	OP5	OP4	OP3	OP0			
		Uppe	r-Byte Invert Reg	gister for DQ Calib	ration			
Fun	ction	Туре	Operand		Data		Note	tes
Upper-Byte Inv Calibration	ert for DQ	Write-only	OP[7:0]	OP[7:0], and wi locations DQ[15 0B: Do not invel	Q Calibration patt	e corresponding [ ane:	DQ 1,2	,2

#### Notes

- 1. This register will invert the DQ Calibration pattern found in MR32 and MR40 for any single DQ, or any combination of DQ's. Example: If MR20 OP[7:0]=00010101B, then the DQ Calibration patterns transmitted on DQ[15,14,13,11,9] will not be inverted, but the DQ Calibration patterns transmitted on DQ[12,10,8] will be inverted.
- 2. DMI[1] is not inverted, and always transmits the "true" data contained in MR32/MR40.
- 3. No Data Bus Inversion (DBI) function is enacted during DQ Read Calibration, even if DBI is enabled in MR3- OP[6].

Table 56, MR20 Invert Register Pin Mapping

					<u></u>	app	<u>ə</u>		
PIN	DQ8	DQ9	DQ10	DQ11	DMI1	DQ12	DQ13	DQ14	DQ15
MR20	OP0	OP1	OP2	OP3	NO-Invert	OP4	OP5	OP6	OP7

MR21 (Reserved) (MA[5:0] = 15H)



Table 57. MR22 Register Information (MA[5:0] = 16H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
RI	FU	ODTD-CA	ODTE-CS	ODTE-CK			
Fund	ction	Type	Operand		Notes		
SoC ODT (Controller ODT calibration)	「Value for VOH	Mile out	OP[2:0]	000B: Disable (I 001B: RZQ/1 010B: RZQ/2 011B: RZQ/3 100B: RZQ/4 101B: RZQ/5 110B: RZQ/6 111B: RFU	Default)		1,2,3
ODTE-CK (CK ODT enable non-terminating		Write-only	OP[3]	0B: ODT-CK Ov Over-ride Enabl		(Default) 1B: ODT-Ch	2,3,4, 6,8
ODTE-CS (CS ODT enable non- terminating			OP[4]	0B: ODT-CS Ov Over-ride Enabl		(Default) 1B: ODT-CS	3 2,3,5, 6,8
ODTD-CA (CA ODT termin	nation disable)		OP[5]	0B: ODT-CA Ob 1B: ODT-CA Di	peys ODT_CA bo sabled	nd pad (default)	2,3,6, 7,8

#### Notes:

- 1. All values are "typical".
- 2. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. Only the registers for the set point determined by the state of the FSP-WR bit (MR13 OP[6]) will be written to with an MRW command to this MR address, or read from with an MRR command to this address.
- 3. There are two physical registers assigned to each bit of this MR parameter, designated set point 0 and set point 1. The device will operate only according to the values stored in the registers for the active set point, i.e., the set point determined by the state of the FSP-OP bit (MR13 OP[7]). The values in the registers for the inactive set point will be ignored by the device, and may be changed without affecting device operation.
- 4. When OP[3]=1, then the CK signals will be terminated to the value set by MR11-OP[6:4] regardless of the state of the ODT\_CA bond pad. This overrides the ODT\_CA bond pad for configurations where CA is shared by two or more DRAMs but CK is not, allowing CK to terminate on all DRAMs.
- 5. When OP[4]=1, then the CS signal will be terminated to the value set by MR11-OP[6:4] regardless of the state of the ODT\_CA bond pad. This overrides the ODT\_CA bond pad for configurations where CA is shared by two or more DRAMs but CS is not, allowing CS to terminate on all DRAMs.
- 6. For system configurations where the CK, CS, and CA signals are shared between packages, the package design should pro- vide for the ODT\_CA ball to be bonded on the system board outside of the memory package. This provides the necessary control of the ODT function for all die with shared Command Bus signals.
- 7. When OP[5]=0, CA[5:0] will terminate when the ODT\_CA bond pad is HIGH and MR11-OP[6:4] is VALID, and disables termination when ODT\_CA is LOW or MR11-OP[6:4] is disabled. When OP[5]=1, termination for CA[5:0] is disabled, regardless of the state of the ODT\_CA bond pad or MR11-OP[6:4].
- 8. To ensure proper operation in a multi-rank configuration, when CA, CK or CS ODT is enabled via MR11 OP[6:4] and also via MR22 or CA-ODT pad setting, the rank providing ODT will continue to terminate the command bus in all DRAM states including Active Self Refresh, Self Refresh Power-down, Active Power-down and Precharge Power-down.

Table 58. MR23 Register Information (MA[5:0] = 17H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
<b>U.</b> .	0.0	0.0	DQS interval tim	er run time setting	3	<u> </u>	<u> </u>
Function	Туре	Operand			Data		Notes
DQS interval timer run time	Write-only	OP[7:0]	0000001B: DQ 0000001B: DQ 0000001B: DQ 0000010B: DQ Thru 00111111B: DQ 01XXXXXXB: D 10XXXXXXB: D	S timer stops autor S timer stops autor S timer stops autor S timer stops autor S timer stops autor QS timer stops aut QS timer stops aut	natically at 32nd clo natically at 48th clo natically at 64th clo natically at (63X16) omatically at 2048t omatically at 4096t	and (Default) cks after timer start ocks after timer start ocks after timer start cks after timer start th clocks after timer s h clocks after timer s h clocks after timer s d clocks after timer s	tart tart

- 1. MPC command with OP[6:0]=1001101B (Stop DQS Interval Oscillator) stops DQS interval timer in case of MR23 OP[7:0] =
- 2. MPC command with OP[6:0]=1001101B (Stop DQS Interval Oscillator) is illegal with non-zero values in MR23 OP[7:0].



Table 59. MR24 Register Information (MA[5:0] = 18H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0		
TRR Mode		TRR Mode BAn		Unitd MAC MAC Value					
Fund	ction	Type	Operand	Data					
MAC Value		Read-only	OP[2:0]	000B: Unknown when bit OP3=0 (Note 1)					
Unlimited MAC			OP[3]	0B: OP[2:0] defi 1B: Unlimited M	ne MAC value AC value (Note 2	2, Note 3)			
TRR Mode BAn		Write-only	OP[6:4]	000B: Bank 0 001B: Bank 1 010B: Bank 2 011B: Bank 3 100B: Bank 4 101B: Bank 5 110B: Bank 6 111B: Bank 7					
TRR Mode			OP[7]	0B: Disabled (de 1B: Enabled	efault)				

## Notes:

- 1. Unknown means that the device is not tested for tMAC and pass/fail value in unknown.
- 2. There is no restriction to number of activates.
- 3. MR24 OP [2:0] is set to zero.

# Table 60. MR25 Register Information (MA[5:0] = 19H)

Mode Register 25 contains one bit of readout per bank indicating that at least one resource is available for Post Package Repair programming.

<u> </u>	3							
OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0	
Bank7	Bank6	Bank5	Bank4	Bank3	Bank2	Bank1	Bank0	
Fun	Function		Operand	Data				
PPR Resource Read-onl		Read-only	OP[2:0]	0B: PPR Resource is not available 1B: PPR Resource is available				

# MR26~29 (Reserved) (MA[5:0] = 1AH-1DH)

Table 61. MR30 Register Information (MA[5:0] = 1EH)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0		
Valid 0 or 1									
Fun	ction	Type	Operand		Data		Notes		
SDRAM will igr	nore	Write-only	OP[7:0]	Don't care			1		

### Notes

MR31 (Reserved) (MA[5:0] = 1FH)



<sup>1.</sup> This register is reserved for testing purposes. The logical data values written to OP[7:0] shall have no effect on SDRAM operation, however timings need to be observed as for any other MR access command.

Table 62. MR32 Register Information (MA[5:0] = 20H)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0			
		DQ	Calibration Patte	ern "A" (default = 5	iAH)					
Fun	ction	Туре	Operand	Data						
Return DQ Cal MR32 + MR40		Write	OP[7:0]	device to return register and (fol "5AH"is loaded overwritten with	ommand with OP[inthe DQ Calibration of Calibratic of Calibration of Calibratic of Calibration of Calibration of Calibratic of Calibration of	on Pattern contain Itents of MR40. A ESET, or the patt Egister. The conte	ned in this default pattern tern may be ents of MR15			

# MR33~38 (Reserved) (MA[5:0] = 21H-26H)

Table 63. MR39 Register Information (MA[5:0] = 27H)

		<del></del>	<u> </u>	••••••••••••••••••••••••••••••••••••••	<u>[                                </u>	· · · <i>,</i>			
OP7	OP6	OP5	OP4	OP3	OP2	OP1	0	P0	
Valid 0 or 1									
Fun	Function Type Operand Data No							Notes	
SDRAM will ign	ore	Write-only	OP[7:0]	Don't care				1	

#### Notes:

1. This register is reserved for testing purposes. The logical data values written to OP[7:0] shall have no effect on SDRAM operation, however timings need to be observed as for any other MR access command.

Table 64. MR40 Register Information (MA[5:0] = 28H)

OP7	OP6	OP5	OP4	OP3	OP2	OP2 OP1 OP6					
DQ Calibration Pattern "B" (default = 3CH)											
Fun	ction	Туре	Operand		Data		Notes				
Return DQ Cali MR32 + MR40		Write-only	OP[7:0]	XB: A default pa RESET, or the p to this register. See MR32 for m							

- 1. The pattern contained in MR40 is concatenated to the end of MR32 and transmitted on DQ[15:0] and DMI[1:0] when DQ Read Calibration is initiated via a MPC command. The pattern transmitted serially on each data lane, organized "little endian" such that the low-order bit in a byte is transmitted first. If the data pattern in MR40 is 27H, then the first bit transmitted with be a '1', followed by '1', '1', '0', '0', '1', '0', and '0'. The bit stream will be 00100111B.
- 2. MR15 and MR20 may be used to invert the MR32/MR40 data patterns on the DQ pins. See MR15 and MR20 for more information. Data is never inverted on the DMI[1:0] pins.
- 3. The data pattern is not transmitted on the DMI[1:0] pins if DBI-RD is disabled via MR3-OP[6].
- 4. No Data Bus Inversion (DBI) function is enacted during DQ Read Calibration, even if DBI is enabled in MR3-OP[6].



# Refresh Requirement

Between SRX command and SRE command, at least one extra refresh command is required. After the DRAM Self Refresh Exit command, in addition to the normal Refresh command at tREFI interval, the DRAM requires minimum of one extra Refresh command prior to Self Refresh Entry command.

Table 65. Refresh Requirement Parameters per die for Dual Channel devices

Refresh Requiremen	nts	Symbol	16Gb	Units
Density per Channel			8Gb	
Number of banks per channel			8	
Refresh Window (tREFW) (1x Refresh) <sup>2,3</sup>		tREFW	32	ms
Required Number of Refresh Commands	in a tREFW window	R	8192	-
Average Refresh Interval (1x Refresh) <sup>2</sup>	REFAB	tREFI	3.904	us
Average Reliesh interval (1x Reliesh)	REFPB	tREFIpb	488	ns
Refresh Cycle Time (All Banks)		tRFCab	280	ns
Refresh Cycle Time (Per Bank)	tRFCpb	140	ns	
Per-bank Refresh to Per-bank Refresh di	fferent bank Time	tpbR2pbR	90	ns

#### Notes:

- 1. Refresh for each channel is independent of the other channel on the die, or other channels in a package. Power delivery in the user's system should be verified to make sure the DC operating conditions are maintained when multiple channels are refreshed simultaneously.
- 2. 1x refersh rate (tREFW=32ms) is supported at all temperatures at or below 85°C Tcase. If MR4 OP[2:0] indicates a refresh rate of greater than 1x is supported, tREFW can be extended.
- 3. Refer to MR4 OP[2:0] for detailed Refresh Rate and its multipliers.

# **Absolute Maximum Ratings**

Stresses greater than those listed may cause permanent damage to the device.

This is a stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Table 66. Absolute Maximum DC Ratings

Symbol	Parameter	Min	Max	Units	Notes
VDD1	VDD1 supply voltage relative to Vss	-0.4	2.1	V	1
VDD2	VDD2 supply voltage relative to Vss	-0.4	1.5	V	1
VDDQ	VDDQ supply voltage relative to VSSQ	-0.4	1.5	V	1
VIN, VOUT	Voltage on any ball except VDD1 relative to Vss	-0.4	1.5	V	
TSTG	Storage Temperature	-55	125	°C	2

- 1. See "Power-Ramp" for relationships between power supplies.
- Storage Temperature is the case surface temperature on the center/top side of the LPDDR4 device. For the measurement conditions, please refer to JESD51-2.



**Table 67. Operating Temperature Range** 

	Taking of the personning in	• • • • • • • • • • • • • • • • • • • •	<u>.                                    </u>			_
Symbol	Parameter	Min	Max	Units	Notes	
TOPER	Standard	-25	85	°C	1~2	

## Notes:

- Operating Temperature is the case surface temperature on the center-top side of the device. For the measurement conditions, please refer to JESD51-2.
- 2. Either the device case temperature rating or the temperature sensor may be used to set an appropriate refresh rate, determine the need for AC timing de-rating and/or monitor the operating temperature. When using the temperature sensor, the actual device case temperature may be higher than the TOPER rating that applies for the Standard or Elevated Temperature Ranges. For example, TCASE may be above 85°C when the temperature sensor indicates a temperature of less than 85°C.

# **AC and DC Operating Conditions**

**Table 68. Recommended DC Operating Conditions** 

Symbol	Parameter	Min	Тур	Max	Units	Notes
VDD1	Core 1 Power	1.70	1.80	1.95	V	1,2
VDD2	Core 2 Power/Input Buffer Power	1.06	1.10	1.17	V	1,2,3
VDDQ	I/O Buffer Power	1.06	1.10	1.17	V	2,3

#### Notes:

- 1. VDD1 uses significantly less current than VDD2.
- 2. The voltage range is for DC voltage only. DC is defined as the voltage supplied at the DRAM and is inclusive of all noise up to 20MHz at the DRAM package ball.
- 3. VdIVW and TdIVW limits described elsewhere in this document apply for voltage noise on supply voltages of up to 45 mV (peak-to- peak) from DC to 20MHz.

Table 69. Input Leakage Current

	1 311010 001111 0110 = 0				
Symbol	Parameter	Min	Max	Units	Notes
IL	Input Leakage current	-4	4	uA	1,2

## Notes:

- 1. For CK, CK#, CKE, CS, CA, ODT\_CA and RESET#. Any input 0V ≤ VIN ≤ VDD2 (All other pins not under test = 0V).
- 2. CA ODT is disabled for CK, CK#, CS, and CA.

Table 70. Input/Output Leakage Current

Symbol	Parameter	Min	Max	Units	Notes
IOZ	Input/Output Leakage current	-5	5	uA	1,2

- 1. For DQ, DQS, DQS# and DMI. Any I/O 0V ≦ VOUT ≦ VDDQ.
- 2. I/Os status are disabled: High Impedance and ODT Off.



Table 71. Input/output capacitance

Symbol	Parameter	Min	Max	Units	Notes
CCK	Input capacitance, CK and CK#	TBD	TBD	рF	1,2
CDCK	Input capacitance delta, CK and CK#	TBD	TBD	pF	1,2,3
CI	Input capacitance, All other input-only pins	TBD	TBD	рF	1,2,4
CDI	Input capacitance delta, All other input-only pins	TBD	TBD	рF	1,2,5
CIO	Input/output capacitance, DQ, DMI, DQS, DQS#	TBD	TBD	рF	1,2,6
CDDQS	Input/output capacitance delta, DQS,DQS#	TBD	TBD	рF	1,2,7
CDIO	Input/output capacitance delta, DQ, DMI	TBD	TBD	рF	1,2,8
CZQ	Input/output capacitance, ZQ pin	TBD	TBD	рF	1,2

- This parameter applies to die device only (does not include package capacitance).
   This parameter is not subject to production test. It is verified by design and characterization. The capacitance is measured according to JEP147 (Procedure for measuring input capacitance using a vector network analyzer (VNA) with VDD1, VDD2, VDDQ, VSS, VSSQ applied and all other pins floating.
- 3. Absolute value of CCK, CCK#.
  4. Cl applieds to CS, CKE, CA0~CA5.
  5. CDI = CI 0.5 x (CCK + CCK#)
- 6. DMI loading matches DQ and DQS.
- 7. Absolute value of CDQS and CDQS#.
- 8. CDIO = CIO 0.5 x (CDQS + CDQS#) in byte-lane.



## **IDD Measurement Conditions**

The following definitions are used within the IDD measurement tables unless stated otherwise:

LOW:  $VIN \le VIL(DC)$  MAX HIGH:  $VIN \ge VIH(DC)$  MIN

STABLE: Inputs are stable at a HIGH or LOW level

SWITCHING: Please refer to the following two tables below:

Table 72. Definition of Switching for CA Input Signals

	Table 72. Definition of divicening for 67 input digitals										
			Sı	witching for (	CA						
CK Edge	R1	R2	R3	R4	R5	R6	R7	R8			
CKE	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH			
CS	LOW	LOW	LOW	LOW	LOW	LOW	LOW	LOW			
CA0	HIGH	LOW	LOW	LOW	LOW	HIGH	HIGH	HIGH			
CA1	HIGH	HIGH	HIGH	LOW	LOW	LOW	LOW	HIGH			
CA2	HIGH	LOW	LOW	LOW	LOW	HIGH	HIGH	HIGH			
CA3	HIGH	HIGH	HIGH	LOW	LOW	LOW	LOW	HIGH			
CA4	HIGH	LOW	LOW	LOW	LOW	HIGH	HIGH	HIGH			
CA5	HIGH	HIGH	HIGH	LOW	LOW	LOW	LOW	HIGH			

#### Notes:

- 1. CS must always be driven LOW.
- 2. 50% of CA bus is changing between HIGH and LOW once per clock for the CA bus.
- 3. The above pattern is used continuously during IDD measurement for IDD values that require switching on the CA bus.

Table 73. CA pattern for IDD4R

Clock Cycle Number	CKE	cs	Command	CA0	CA1	CA2	CA3	CA4	CA5
N	HIGH	HIGH	Dood 4	L	Н	L	L	L	L
N+1	HIGH	LOW	Read-1	L	Н	L	L	L	L
N+2	HIGH	HIGH	CAS-2	L	Н	L	L	Н	L
N+3	HIGH	LOW	CAS-2	L	L	L	L	L	L
N+4	HIGH	LOW	DES	L	L	L	L	L	L
N+5	HIGH	LOW	DES	L	L	L	L	L	L
N+6	HIGH	LOW	DES	L	L	L	L	L	L
N+7	HIGH	LOW	DES	L	L	L	L	L	L
N+8	HIGH	HIGH	Dood 1	L	Н	L	L	L	L
N+9	HIGH	LOW	Read-1	L	Н	L	L	Н	L
N+10	HIGH	HIGH	CAS-2	L	Н	L	L	Н	Н
N+11	HIGH	LOW	CA3-2	Н	Н	Н	Н	Н	Н
N+12	HIGH	LOW	DES	L	L	L	L	L	L
N+13	HIGH	LOW	DES	L	L	L	L	L	L
N+14	HIGH	LOW	DES	L	L	L	L	L	L
N+15	HIGH	LOW	DES	L	L	L	L	L	L

- 1. BA[2:0] = 010, C[9:4] = 000000 or 111111, Burst Order C[3:2] = 00 or 11 (Same as LPDDR3 IDD4R Spec)
- 2. Difference from LPDDR3 (JESD209-3): CA pins are kept low with DES CMD to reduce ODT current.



Table 74. CA pattern for IDD4W

Clock Cycle Number	CKE	CS	Command	CA0	CA1	CA2	CA3	CA4	CA5
N	HIGH	HIGH	Write-1	L	L	Н	L	L	L
N+1	HIGH	LOW	vviile- i	L	Н	L	L	L	L
N+2	HIGH	HIGH	CAS-2	L	Н	L	L	Н	L
N+3	HIGH	LOW	CA3-2	L	L	L	L	L	L
N+4	HIGH	LOW	DES	L	L	L	L	L	L
N+5	HIGH	LOW	DES	L	L	L	L	L	L
N+6	HIGH	LOW	DES	L	L	L	L	L	L
N+7	HIGH	LOW	DES	L	L	L	L	L	L
N+8	HIGH	HIGH	Write-1	L	L	Н	L	L	L
N+9	HIGH	LOW	vviile- i	L	Н	L	L	Н	L
N+10	HIGH	HIGH	CAS-2	L	Н	L	L	Н	Н
N+11	HIGH	LOW	CA3-2	L	L	Н	Н	Н	Н
N+12	HIGH	LOW	DES	L	L	L	L	L	L
N+13	HIGH	LOW	DES	L	L	L	L	L	L
N+14	HIGH	LOW	DES	L	L	L	L	L	L
N+15	HIGH	LOW	DES	L	L	L	L	L	L

- BA[2:0] = 010, CA[9:4] = 000000 or 111111 (Same as LPDDR3 IDD4W).
   Difference from LPDDR3 (JESD209-3): 1)-No burst ordering, and 2) CA pins are kept low with DES CMD to reduce ODT current.

Table 75. Data Pattern for IDD4W (DBI off)

		1 0.010		DBI OFF (	Case		<b></b>			N = -5.41=
	DQ[7]	DQ[6]	DQ[5]	DQ[4]	DQ[3]	DQ[2]	DQ[1]	DQ[0]	DBI	No. of 1's
BL0	1	1	1	1	1	1	1	1	0	8
BL1	1	1	1	1	0	0	0	0	0	4
BL2	0	0	0	0	0	0	0	0	0	0
BL3	0	0	0	0	1	1	1	1	0	4
BL4	0	0	0	0	0	0	1	1	0	2
BL5	0	0	0	0	1	1	1	1	0	4
BL6	1	1	1	1	1	1	0	0	0	6
BL7	1	1	1	1	0	0	0	0	0	4
BL8	1	1	1	1	1	1	1	1	0	8
BL9	1	1	1	1	0	0	0	0	0	4
BL10	0	0	0	0	0	0	0	0	0	0
BL11	0	0	0	0	1	1	1	1	0	4
BL12	0	0	0	0	0	0	1	1	0	2
BL13	0	0	0	0	1	1	1	1	0	4
BL14	1	1	1	1	1	1	0	0	0	6
BL15	1	1	1	1	0	0	0	0	0	4
BL16	1	1	1	1	1	1	0	0	0	6
BL17	1	1	1	1	0	0	0	0	0	4
BL18	0	0	0	0	0	0	1	1	0	2
BL19	0	0	0	0	1	1	1	1	0	4
BL20	0	0	0	0	0	0	0	0	0	0
BL21	0	0	0	0	1	1	1	1	0	4
BL22	1	1	1	1	1	1	1	1	0	8
BL23	1	1	1	1	0	0	0	0	0	4
BL24	0	0	0	0	0	0	1	1	0	2
BL25	0	0	0	0	1	1	1	1	0	4
BL26	1	1	1	1	1	1	0	0	0	6
BL27	1	1	1	1	0	0	0	0	0	4
BL28	1	1	1	1	1	1	1	1	0	8
BL29	1	1	1	1	0	0	0	0	0	4
BL30	0	0	0	0	0	0	0	0	0	0
BL31	0	0	0	0	1	1	1	1	0	4
No. of 1's	16	16	16	16	16	16	16	16		



<sup>1.</sup> Same data pattern was applied to DQ[4], DQ[5], DQ[6], DQ[7] for reducing complexity for IDD4W/R pattern programming.

Table 76. Data Pattern for IDD4R (DBI off)

DBI OFF Case										
	DQ[7]	DQ[6]	DQ[5]	DQ[4]	DQ[3]	DQ[2]	DQ[1]	DQ[0]	DBI	No. of 1's
BL0	1	1	1	1	1	1	1	1	0	8
BL1	1	1	1	1	0	0	0	0	0	4
BL2	0	0	0	0	0	0	0	0	0	0
BL3	0	0	0	0	1	1	1	1	0	4
BL4	0	0	0	0	0	0	1	1	0	2
BL5	0	0	0	0	1	1	1	1	0	4
BL6	1	1	1	1	1	1	0	0	0	6
BL7	1	1	1	1	0	0	0	0	0	4
BL8	1	1	1	1	1	1	1	1	0	8
BL9	1	1	1	1	0	0	0	0	0	4
BL10	0	0	0	0	0	0	0	0	0	0
BL11	0	0	0	0	1	1	1	1	0	4
BL12	0	0	0	0	0	0	1	1	0	2
BL13	0	0	0	0	1	1	1	1	0	4
BL14	1	1	1	1	1	1	0	0	0	6
BL15	1	1	1	1	0	0	0	0	0	4
BL16	1	1	1	1	1	1	1	1	0	8
BL17	1	1	1	1	0	0	0	0	0	4
BL18	0	0	0	0	0	0	0	0	0	0
BL19	0	0	0	0	1	1	1	1	0	4
BL20	1	1	1	1	1	1	0	0	0	6
BL21	1	1	1	1	0	0	0	0	0	4
BL22	0	0	0	0	0	0	1	1	0	2
BL23	0	0	0	0	1	1	1	1	0	4
BL24	0	0	0	0	0	0	1	1	0	0
BL25	0	0	0	0	1	1	1	1	0	4
BL26	1	1	1	1	1	1	1	1	0	8
BL27	1	1	1	1	0	0	0	0	0	4
BL28	0	0	0	0	0	0	1	1	0	2
BL29	0	0	0	0	1	1	1	1	0	4
BL30	1	1	1	1	1	1	0	0	0	6
BL31	1	1	1	1	0	0	0	0	0	4
No. of 1's	16	16	16	16	16	16	16	16		



<sup>1.</sup> Same data pattern was applied to DQ[4], DQ[5], DQ[6], DQ[7] for reducing complexity for IDD4W/R pattern programming.

Table 77. Data Pattern for IDD4W (DBI On)

DBI ON Case									T.,	
	DQ[7]	DQ[6]	DQ[5]	DQ[4]	DQ[3]	DQ[2]	DQ[1]	DQ[0]	DBI	No. of 1's
BL0	0	0	0	0	0	0	0	0	1	1
BL1	1	1	1	1	0	0	0	0	0	4
BL2	0	0	0	0	0	0	0	0	0	0
BL3	0	0	0	0	1	1	1	1	0	4
BL4	0	0	0	0	0	0	1	1	0	2
BL5	0	0	0	0	1	1	1	1	0	4
BL6	0	0	0	0	0	0	1	1	1	3
BL7	1	1	1	1	0	0	0	0	0	4
BL8	0	0	0	0	0	0	0	0	1	1
BL9	1	1	1	1	0	0	0	0	0	4
BL10	0	0	0	0	0	0	0	0	0	0
BL11	0	0	0	0	1	1	1	1	0	4
BL12	0	0	0	0	0	0	1	1	0	2
BL13	0	0	0	0	1	1	1	1	0	4
BL14	0	0	0	0	0	0	1	1	1	3
BL15	1	1	1	1	0	0	0	0	0	4
BL16	0	0	0	0	0	0	1	1	1	3
BL17	1	1	1	1	0	0	0	0	0	4
BL18	0	0	0	0	0	0	1	1	0	2
BL19	0	0	0	0	1	1	1	1	0	4
BL20	0	0	0	0	0	0	0	0	0	0
BL21	0	0	0	0	1	1	1	1	0	4
BL22	0	0	0	0	0	0	1	1	0	1
BL23	1	1	1	1	0	0	0	0	0	4
BL24	0	0	0	0	0	0	1	1	0	2
BL25	0	0	0	0	1	1	1	1	0	4
BL26	0	0	0	0	0	0	1	1	1	3
BL27	1	1	1	1	0	0	0	0	0	4
BL28	0	0	0	0	0	0	0	0	1	1
BL29	1	1	1	1	0	0	0	0	0	4
BL30	0	0	0	0	0	0	0	0	0	0
BL31	0	0	0	0	1	1	1	1	0	4
No. of 1's	8	8	8	8	8	8	16	16	8	



<sup>1.</sup> DBI enabled burst: BL0, BL6, BL8, BL14, BL16, BL22, BL26, and BL28.

Table 78. Data Pattern for IDD4R (DBI On)

DBI ON Case										
	DQ[7]	DQ[6]	DQ[5]	DQ[4]	DQ[3]	DQ[2]	DQ[1]	DQ[0]	DBI	No. of 1's
BL0	0	0	0	0	0	0	0	0	1	1
BL1	1	1	1	1	0	0	0	0	0	4
BL2	0	0	0	0	0	0	0	0	0	0
BL3	0	0	0	0	1	1	1	1	0	4
BL4	0	0	0	0	0	0	1	1	0	2
BL5	0	0	0	0	1	1	1	1	0	4
BL6	0	0	0	0	0	0	1	1	1	3
BL7	1	1	1	1	0	0	0	0	0	4
BL8	0	0	0	0	0	0	0	0	0	1
BL9	1	1	1	1	0	0	0	0	0	4
BL10	0	0	0	0	0	0	0	0	0	0
BL11	0	0	0	0	1	1	1	1	0	4
BL12	0	0	0	0	0	0	1	1	0	2
BL13	0	0	0	0	1	1	1	1	0	4
BL14	0	0	0	0	0	0	1	1	1	3
BL15	1	1	1	1	0	0	0	0	0	4
BL16	0	0	0	0	0	0	0	0	0	1
BL17	1	1	1	1	0	0	0	0	0	4
BL18	0	0	0	0	0	0	0	0	0	0
BL19	0	0	0	0	1	1	1	1	0	4
BL20	0	0	0	0	0	0	1	1	1	3
BL21	0	0	0	0	1	1	1	1	0	4
BL22	0	0	0	0	0	0	1	1	0	2
BL23	1	1	1	1	0	0	0	0	0	4
BL24	0	0	0	0	0	0	0	0	0	0
BL25	0	0	0	0	1	1	1	1	0	4
BL26	0	0	0	0	0	0	0	0	0	1
BL27	1	1	1	1	0	0	0	0	0	4
BL28	0	0	0	0	0	0	1	1	0	2
BL29	1	1	1	1	0	0	0	0	0	4
BL30	0	0	0	0	0	0	1	1	1	3
BL31	0	0	0	0	1	1	1	1	0	4
No. of 1's	8	8	8	8	8	8	16	16	8	



<sup>1.</sup> DBI enabled burst: BL0, BL6, BL8, BL14, BL16, BL20, BL26, and BL30.

# **IDD Specifications**

IDD values are for the entire operating voltage range, and all of them are for the entire standard range, with the exception of IDD6ET which is for the entire elevated temperature range.

**Table 79. IDD Specification Parameters and Operating Conditions** 

Table 19. IDD Specification Farameters and Opt			
Parameter/Condition	Symbol	Power Supply	Note
Operating one bank active-precharge current:	IDD01	VDD1	
tCK = tCKmin; tRC = tRCmin; CKE is HIGH; CS is LOW between valid commands; CA	IDD02	VDD2	
bus inputs are switching; Data bus inputs are stable, ODT disabled	IDD0Q	VDDQ	3
Idle power-down standby current:	IDD2P1	VDD1	
tCK = tCKmin;CKE is LOW;CS is LOW; All banks are idle; CA bus inputs are switching;	IDD2P2	VDD2	
Data bus inputs are stable, ODT disabled	IDD2PQ	VDDQ	3
ldle power-down standby current with clock stop:	IDD2PS1	VDD1	
CK = LOW, CK# = HIGH; CKE is LOW; CS is LOW; All banks are idle; CA bus inputs	IDD2PS2	VDD2	
are stable; Data bus inputs are stable,ODT disabled	IDD2PSQ	VDDQ	3
Idle non-power-down standby current:	IDD2N1	VDD1	
tCK = tCKmin; CKE is HIGH; CS is LOW; All banks are idle; CA bus inputs are	IDD2N2	VDD2	
switching; Data businputs are stable, ODT disabled	IDD2NQ	VDDQ	3
Idle non-power-down standby current with clock stopped:	IDD2NS1	VDD1	
CK=LOW; CK#=HIGH; CKE is HIGH; CS is LOW; All banks are idle; CA bus inputsare	IDD2NS2	VDD2	
stable; Data bus inputs are stable, ODT disabled	IDD2NSQ	VDDQ	3
Active power-down standby current:	IDD3P1	VDD1	
tCK = tCKmin; CKE is LOW; CS is LOW; One bank is active; CA bus inputs are	IDD3P2	VDD2	
switching; Data bus inputs are stable, ODT disabled	IDD3PQ	VDDQ	3
Active power-down standby current with clock stop:	IDD3PS1	VDD1	
CK=LOW, CK#=HIGH; CKE is LOW; CS is LOW; One bank is active; CA bus inputs are	IDD3PS2	VDD2	
stable; Data bus inputs are stable, ODT disabled	IDD3PSQ	VDDQ	4
Active non-power-down standby current:	IDD3N1	VDD1	
tCK = tCKmin; CKE is HIGH; CS is LOW; One bank is active; CA bus inputs are	IDD3N2	VDD2	
switching; Data bus inputs are stable, ODT disabled	IDD3NQ	VDDQ	4
Active non-power-down standby current with clock stopped:	IDD3NS1	VDD1	<u> </u>
CK=LOW, CK#=HIGH; CKE is HIGH; CS is LOW; One bank is active; CA bus inputs are	IDD3NS2	VDD2	
stable; Data bus inputs are stable, ODT disabled	IDD3NSQ	VDDQ	4
Operating burst READ current:	IDD4R1	VDD1	· · · · · · · · · · · · · · · · · · ·
tCK = tCKmin; CS is LOW between valid commands; One bank is active; BL = 16 or 32;			
RL = RL(MIN); CA bus inputs are switching; 50% data change each burst transfer ODT	IDD4R2	VDD2	
disabled	IDD4RQ	VDDQ	5
Operating burst WRITE current:	IDD4W1	VDD1	
tCK = tCKmin; CS is LOW between valid commands; One bank is active; BL = 16 or 32;	IDD4W2	VDD2	
WL = WLmin; CAbus inputs are switching; 50% data change each burst transfer ODT	IDD4WQ	VDDQ	4
disabled	IDD51	VDD1	
All bank REFRESH Burst current:		+	
tCK = tCKmin; CKE is HIGH between valid commands; tRC = tRFCabmin; Burst refresh; CA bus inputs are switching; Data bus inputs are stable; ODT disabled	IDD52	VDD2	4
	IDD5Q	VDDQ	4
All bank REFRESH Average current:	IDD5AB1	VDD1	
tCK = tCKmin; CKE is HIGH be- tween valid commands; tRC = tREFI; CA bus inputs	IDD5AB2	VDD2	4
are switching; Databus inputs are stable; ODT disabled	IDD5ABQ	VDDQ	4
Per bank REFRESH Average current:	IDD5PB1	VDD1	
tCK = tCKmin; CKE is HIGH between valid commands; tRC = tREFI/8; CA bus inputs	IDD5PB2	VDD2	
are switching; Data bus inputs are stable; ODT disabled	IDD5PBQ	VDDQ	4
Power Down Self Refresh current (-25 °C to +85 °C):	IDD61	VDD1	6,7,9
CK=LOW, CK#=HIGH; CKE is LOW; CA bus inputs are stable; Data bus inputs are	IDD62	VDD2	6,7,9
stable; ODT disabled	IDD6Q	VDDQ	4,6,7,9



- 1. Published IDD values are the maximum of the distribution of the arithmetic mean.
- 2. ODT disabled: MR11[2:0] = 000B.
- 3. IDD current specifications are tested after the device is properly initialized.
- 4. Measured currents are the summation of VDDQ and VDD2.
- 5. Guaranteed by design with output load = 5pF and RON = 40  $\Omega$ .
- 6. This is the general definition that applies to full array Self Refresh.
- 7. Supplier data sheets may contain additional Self Refresh IDD values for temperature subranges within the Standard or elevated Temperature Ranges.
- 8. For all IDD measurements, VIHCKE = 0.8 x VDD2, VILCKE = 0.2 x VDD2.
- 9. IDD6 85°C is guaranteed, IDD6 25°C is typical of the distribution of the arithmetic mean.



Table 80. IDD Specification Parameters (Single Die)  $(T_{OPER}, V_{DDQ} = 1.06-1.17V, V_{DD1} = 1.70-1.95V, V_{DD2} = 1.06-1.17V)$ 

Parameter	Supply	3733Mbps	Unit
IDD01	VDD1	8	mA
IDD02	VDD2	58	mA
IDD0Q	VDDQ	1.5	mA
IDD2P1	VDD1	2.4	mA
IDD2P2	VDD2	3.6	mA
IDD2PQ	VDDQ	1.5	mA
IDD2PS1	VDD1	2.4	mA
IDD2PS2	VDD2	3.6	mA
IDD2PSQ	VDDQ	1.5	mA
IDD2N1	VDD1	2.4	mA
IDD2N2	VDD2	30	mA
IDD2NQ	VDDQ	1.5	mA
IDD2NS1	VDD1	2.4	mA
IDD2NS2	VDD2	20	mA
IDD2NSQ	VDDQ	1.5	mA
IDD3P1	VDD1	2.4	mA
IDD3P2	VDD2	9.6	mA
IDD3PQ	VDDQ	1.5	mA
IDD3PS1	VDD1	2.4	mA
IDD3PS2	VDD2	9.6	mA
IDD3PSQ	VDDQ	1.5	mA
IDD3N1	VDD1	3.4	mA
IDD3N2	VDD2	42	mA
IDD3NQ	VDDQ	1.5	mA
IDD3NS1	VDD1	3.4	mA
IDD3NS2	VDD2	30	mA
IDD3NSQ	VDDQ	1.5	mA
IDD4R1	VDD1	15	mA
IDD4R2	VDD2	400	mA
IDD4RQ	VDDQ	187.8	mA
IDD4W1	VDD1	15	mA
IDD4W2	VDD2	300	mA
IDD4WQ	VDDQ	1.5	mA
IDD51	VDD1	35	mA
IDD52	VDD2	190	mA
IDD5Q	VDDQ	1.5	mA
IDD5AB1	VDD1	7.6	mA
IDD5AB2	VDD2	36	mA
IDD5ABQ	VDDQ	1.5	mA
IDD5PB1	VDD1	6	mA
IDD5PB2	VDD2	36	mA
IDD5PBQ	VDDQ	1.5	mA



# Table 81. IDD6 specification (Single Die) $(T_{OPER}, V_{DDQ} = 1.06-1.17V, V_{DD1} = 1.70-1.95V, V_{DD2} = 1.06-1.17V)$

Temperature	Parameter	Supply	Full-Array Self Refresh Current	Unit
	IDD61	VDD1	0.65	mA
25°C	IDD62	VDD2	1.33	mA
	IDD6Q	VDDQ	0.02	mA
	IDD61	VDD1	5	mA
85°C	IDD62	VDD2	12	mA
	IDD6Q	VDDQ	1.5	mA



# **Clock Specification**

The jitter specified is a random jitter meeting a Gaussian distribution. Input clocks violating the min/max values may result in malfunction of the device.

# Definitions for t<sub>CK(avg)</sub> and nCK:

t<sub>CK(avg)</sub> is calculated as the average clock period across any consecutive 200 cycle window, where each clock period is calculated from rising edge to rising edge.

$$tCK(avg) = \left(\sum_{j=1}^{N} tCK(abs)_{j}\right) / N$$

Unit ' $t_{CK(avg)}$ ' represents the actual clock average  $t_{CK(avg)}$  of the input clock under operation. Unit 'nCK' represents one clock cycle of the input clock, counting the actual clock edges.

tck(avg) may change by up to ±1% within a 100 clock cycle window, provided that all jitter and timing specs are met.

### Definitions for t<sub>CK(abs)</sub>:

 $t_{CK(abs)}$  is defined as the absolute clock period, as measured from one rising edge to the next consecutive rising edge.  $t_{CK(abs)}$  is not subject to production test.

# Definitions for $t_{CH(avg)}$ and $t_{CL(avg)}$ :

tcH(avg) is defined as the average high pulse width, as calculated across any consecutive 200 high pulses.

$$tCH(avg) = \left(\sum_{j=1}^{N} tCH_{j}\right) / \left(N \times tCK(avg)\right)$$
Where N=200

t<sub>CL(avg)</sub> is defined as the average low pulse width, as calculated across any consecutive 200 low pulses.

$$tCL(avg) = \left(\sum_{j=1}^{N} tCL_{j}\right) / \left(N \times tCK(avg)\right)$$
Where N=200

# Definitions for $t_{CH(abs)}$ and $t_{CL(abs)}$ :

t<sub>CH(abs)</sub> is the absolute instantaneous clock high pulse width, as measured from one rising edge to the following falling edge.

t<sub>CL(abs)</sub> is the absolute instantaneous clock low pulse width, as measured from one falling edge to the following rising edge.

Both t<sub>CH(abs)</sub> and t<sub>CL(abs)</sub> are not subject to production test.

# Definitions for t<sub>JIT(per)</sub>:

 $t_{JIT(per)}$  is the single period jitter defined as the largest deviation of any signal  $t_{CK}$  from  $t_{CK(avg)}$ .  $t_{JIT(per)} = Min/max$  of  $\{t_{CKi} - t_{CK(avg)} \text{ where } i = 1 \text{ to } 200\}$ .

 $t_{\text{JIT}(per),act}$  is the actual clock jitter for a given system.  $t_{\text{JIT}(per),allowed}$  is the specified allowed clock period jitter.  $t_{\text{JIT}(per)}$  is not subject to production test.



# Definitions for $t_{JIT(cc)}$ :

 $t_{\text{JIT(cc)}}$  is defined as the absolute difference in clock period between two consecutive clock cycles.  $t_{\text{JIT(cc)}} = \max_{j \in \mathcal{L}(i+1)} - t_{CK(i)} \}$ .  $t_{\text{JIT(cc)}}$  defines the cycle to cycle jitter.

t<sub>JIT(cc)</sub> is not subject to production test.



# **Electrical Characteristics and AC Timing**

**Table 82. AC Timing**  $(T_{OPER}, V_{DDQ} = 1.06-1.17V, V_{DD1} = 1.70-1.95V, V_{DD2} = 1.06-1.17V)$ 

	<b>Table 82. AC Timing</b> (T <sub>OPER</sub> , V <sub>DDQ</sub> = 1.06-1.17 <sup>b</sup>		Rate		
Symbol	Parameter	37	33	Unit	Note
		Min.	Max.		
	Clock Timir	g			
tCK(avg)	Average clock period	0.535	100	ns	
tCH(avg)	Average High pulse width	0.46	0.54	t <sub>CK</sub>	
tCL(avg)	Average Low pulse width	0.46	0.54	t <sub>CK</sub>	
tCK(abs)	Absolute clock period	Min: t <sub>CK(avg)m</sub>	in + tJIT(per),min	ns	
tCH(abs)	Absolute High clock pulse width	0.43	0.57	t <sub>CK</sub>	
tCL(abs)	Absolute Low clock pulse width	0.43	0.57	t <sub>CK</sub>	
tJIT(per)	Clock period jitter	-34	34	ps	
tJIT(cc)	Maximum Clock Jitter between consecutive cycles	-	68	ps	
	Core Parame	ers			
trc	Activate-to-Activate command period (same bank)		h all bank precharge) n per bank precharge)	ns	
tsr	Minimum Self Refresh Time (Entry to Exit)	max(15ns, 3nCK)	-	ns	
txsr	Self Refresh exit to next valid command delay	max(t <sub>RFCab</sub> + 7.5ns, 2nCK)	-	ns	
txp	Exit Power-Down to next valid command delay	max(7.5ns, 5nCK)	-	ns	3
tccd	CAS-to-CAS delay	8	-	t <sub>CK</sub>	
trtp	Internal Read to Preaharge command delay	max(7.5ns, 8nCK)	-	ns	
trcd	RAS-to-CAS delay	max(18ns, 4nCK)	-	ns	
tRPpb	Row precharge time (single bank)	max(18ns, 4nCK)	-	ns	
tRPab	Row precharge time (all banks)	max(21ns, 4nCK)	-	ns	
tras	Row active time	Min: max(42ns, 3nCK)		ns	L.
	Write recovery time	Max: min(9 x trefi x	Refresh Rate, 70.2)	us	4
twr	Write recovery time	max(18ns, 6nCK)	-	ns	
twrr	Write-to-Read delay  Active bank-A to active bank-B	max(10ns, 8nCK)	-	ns	_
trrd		max(10ns, 4nCK)	-	ns	2
tppD .	Precharge to Precharge Delay	4	-	t <sub>CK</sub>	1
tfaw	Four-bank Activate window	40	-	ns	2
	Read output timings (Unit	: UI = tCK(avg)min/2)			1
toqsq	DQS,DQS# to DQ Skew total, per group,per access (DBI-Disabled)	-	0.18	UI	
tqн	DQ output hold time total from DQS, DQS# (DBI Disabled)	min(tqsh, tqsl)	-	UI	
tQW_total	DQ output window timetotal, per pin (DBI-Disabled)	0.7	-	UI	7
tDQSQ_DBI	DQS,DQS# to DQSkew total,per group,per access (DBI-Enabled)	-	0.18	UI	
tqh_dbi	DQ output hold time total from DQS, DQS# (DBI-Enabled)	min (tQSH_DBI, tQSL_DBI)	-	UI	
tQW_total_DBI	DQ output window time total, per pin (DBI-Enabled)	0.7	-	UI	7
tqsl	DQS, DQS# differential output low time (DBI-Disabled)	tCL(abs) - 0.05	-	t <sub>CK</sub>	7,8
tqsh	DQS, DQS# differential output high time (DBI-Disabled)	tCH(abs) - 0.05	-	t <sub>CK</sub>	7,9
tqsl_dbi	DQS, DQS# differential output low time (DBI-Enabled)	tCL(abs) - 0.045	-	t <sub>CK</sub>	8,10
tQSH_DBI	DQS, DQS# differential output high time (DBI-Enabled)	tCH(abs) - 0.045	-	t <sub>CK</sub>	9,10
	Read AC Timing (Unit U	= tCK(avg)min/2)	•		
trpre	Read preamble	1.8	-	t <sub>CK</sub>	
trpst	0.5 tCK Read postamble	0.4	-	t <sub>CK</sub>	



ps ps ps ps ps UI  ns ps/°C ps/mV ns	
ps ps UI ns ps/°C ps/mV	11-13
ps UI ns ps/°C	11-13
ns ps/°C ps/mV	11-13
ns ps/°C ps/mV	11-13
ps/°C ps/mV	11-13
ps/°C ps/mV	11-13
ps/mV	
-	11-13
ns	
	14,15
	<u> </u>
t <sub>CK</sub>	
t <sub>CK</sub>	16
t <sub>CK</sub>	16
t <sub>CK</sub>	
t <sub>CK</sub>	
t <sub>CK</sub>	
ns	
ns	
-	
-	
ps	
ps	
ps	
-	
ns	17
ns	17
ns	
ns	
ns	17
ns	17
ns	
ns	
ns	17
ns	17
	tck



	Mode Register Read/Wi	rite AC timing			
tmrri	Additional time after txP has expired until MRR command may be issued	trcd + 3nCK	-	-	
tmrr	Mode Register Read command period	8	-	nCK	
tmrw	Mode Register Write command period	max(10ns, 10nCK)	-	-	
tmrd	Mode register set command delay	max(14ns, 10nCK)	-	-	
	Asynchronous OI	OT iming			
tODTon	Asynchronous ODT Turn On	1.5	3.5	ns	
tODToff	Asynchronous ODT Turn Off	1.5	3.5	ns	
	Self-Refresh Timing	Parameters		•	
tescke	Delay from SRE command to CKE Input low	max(1.75ns, 3tCK)	-	ns	18
tsr	Minimum Self Refresh Time	max(15ns, 3tCK)	-	ns	18
txsr	Exit Self Refresh to Valid commands	Min: max(tRFCa	ab + 7.5ns, 2tCK)	ns	18,19
	Command Bus Trainin	g AC Timing		1	l
tckelck	Valid Clock Requirement after CKE Input low	max(5ns, 5nCK)	-	-	
<b>t</b> DStrain	Data Setup for VREF Training Mode	2	-	ns	
<b>t</b> DHtrain	Data Hold for VREF Training Mode	2	-	ns	
tadr	Asynchronous Data Read	-	20	ns	
tCACD	CA Bus Training Command to CA Bus Training Command Delay			t <sub>CK</sub>	21
<b>t</b> DQSCKE	Valid Strobe Requirement before CKE Low	10	-	ns	20
tcaent	First CA Bus Training Command Following CKE Low	250	-	ns	
t <sub>VREFCA_LONG</sub>	VREF Step Time – multiple steps	-	250	ns	
t <sub>VREFCA_SHORT</sub>	Vref Step Time -one step	-	80	ns	
tckprecs	Valid Clock Requirement before CS High	Min: 2tCK + tXP (tXF	P = max(7.5ns, 5nCK))	-	
tckpstcs	Valid Clock Requirement after CS High	max(7.5ns, 5nCK)	-	-	
tcs_vref	Minimum delay from CS to DQS toggle in command bus training	2	-	t <sub>CK</sub>	
tckehdqs	Minimum delay from CKE High to Strobe High Impedance	10	-	ns	
tскскен	Valid Clock Requirement before CKE input High	max(1.75ns, 3nCK)	-	-	
tmrz	CA Bus Training CKE High to DQ Tri-state	1.5	-	ns	
tCKELODTon	ODT turn-on Latency from CKE	20	-	ns	
tCKELODToff	ODT tum-off Latency from CKE	20	-	ns	
tXCBT_Short		Min: max(5)	nCK, 200ns)	-	22
txcbt_Middle	Exit Command Bus Training Mode to next valid command delay	Min: max(5	nCK, 200ns)	-	22
txcbt_Long	delay	Min: max(5)	nCK, 250ns)	-	22
	VRCG Enable/Disab	ole Timing			ı
tVRCG_Enable	VREF high current mode enable time	-	200	ns	
tvRCG_Disable	VREF high current mode disable time	-	100	ns	
	MPC Write FIFO	Timing			
tmpcwr	Additional time after tXP has expired until MPC [Write FIFO] command may be issued	tRCD + 3nCK	-		
	DQS Interval Oscillato	r AC Timing			
tosco	Delay time from OSC stop to Mode Register Readout	max(40ns, 8nCK)	-	ns	23
	Read Preamble Train	ing Timing			
t <sub>SDO</sub>	Delay from MRW command to DQS Driven	-	max(20ns, 12nCK)		
	ZQ Calibration 1	iming			
t <sub>ZQCAL</sub>	ZQ Calibration Time	1	-	us	
t <sub>ZQLAT</sub>	ZQ Calibration Latch Time	max(30ns, 8nCK)	-	ns	
_				_	



t <sub>ZQRESET</sub>	ZQ Calibration Reset Time	max(50ns, 3nCK)	-	ns	
Frequency Set Point Timing					
t <sub>FC_Short</sub>	Frequency Set Point Switching Time	200	-	ns	6
t <sub>FC_Middle</sub>	Minimum Self Refresh Time	200	-	ns	6
t <sub>FC_Long</sub>	Exit Self Refresh to Valid comm	250	-	ns	6
t <sub>CKFSPE</sub>	Valid Clock Requirement after Entering FSP Change	max(7.5ns, 4nCK)	-	-	
t <sub>CKFSPX</sub>	Valid Clock Requirement before 1st Valid Command after FSP change	max(7.5ns, 4nCK)	-	-	

#### Notes:

- 1. Precharge to precharge timing restriction does not apply to Auto-Precharge commands.
- 2. Devices supporting 4267 Mbps specification shall support these timings at lower data rates.
- 3. The value is based on BL16. For BL32 need additional 8 tCK(avg) delay.
- 4. Refresh Rate is specified by MR4, OP[2:0]
- 5. The deterministic component of the total timing. Measurement method tbd.
- Frequency Set Point Switching Time depends on value of VREF(CA) setting: MR12 OP[5:0] and VREF(CA) Range:MR12 OP[6]
  of FSP-OP 0 and 1. Additionally change of Frequency Set Point may affect VREF(DQ) setting. Settling time of VREF(DQ) level is
  same as VREF(CA) level.
- This parameter is function of input clock jitter. These values assume the min tCH(abs) and tCL(abs). When the input clock jitter
  min tCH(abs) and tCL(abs) is 0.44 or greater of tck(avg) the min value of tQSL will be tCL(abs)-0.04 and tQSH will be tCH(abs)0.04
- 8. tQSL describes the instantaneous differential output low pulse width on DQS DQS#, as it measured the next rising edge from an arbitrary falling edge.
- 9. tQSH describes the instantaneous differential output high pulse width on DQS DQS#, as it measured the next rising edge from an arbitrary falling edge.
- 10. This parameter is function of input clock jitter. These values assume the min tCH(abs) and tCL(abs). When the input clock jitter min tCH(abs) and tCL(abs) is 0.44 or greater of tck(avg) the min value of tQSL will be tCL(abs)-0.04 and tQSH will be tCH(abs) 0.04
- 11. Includes DRAM process, voltage and temperature variation. It includes the AC noise impact for frequencies> 20 MHz and max voltage of 45 mV pk-pk from DC-20 MHz at a fixed temperature on the package. The voltage supply noise must comply to the component Min-Max DC Operating conditions.
- 12.tDQSCK temp max delay variation as a function of Temperature.
- 13. tDQSCK\_volt max delay variation as a function of DC voltage variation for VDDQ and VDD2. tDQSCK\_volt should be used to calculate timing variation due to VDDQ and VDD2 noise < 20 MHz. Host controller do not need to account for any variation due to VDDQ and VDD2 noise > 20 MHz. The voltage supply noise must comply to the component Min-Max DC Operating conditions. The voltage variation is defined as the Max[abs{tDQSCKmin@V1- tDQSCKmax@V2}, abs{tDQSCKmax@V1- tDQSCKmin@V2}]/abs{V1- V2}. For tester measurement VDDQ = VDD2 is assumed.
- 14. The same voltage and temperature are applied to tDQS2CK\_rank2rank.
- 15. tDQSCK\_rank2rank parameter is applied to multi-ranks per byte lane within a package consisting of the same design dies.
- 16. The length of Write Postamble depends on MR3 OP1 setting.
- 17. Delay time has to satisfy both analog time(ns) and clock count(nCK).
- 18. Delay time has to satisfy both analog time(ns) and clock count(tCK). It means that tESCKE will not expire until CK has toggled through at least 3 full cycles (3 x tCK) and 1.75ns has transpired.
- 19. MRR-1, CAS-2, DES, MPC, MRW-1 and MRW-2 except PASR Bank/Segment setting are only allowed during this period.
- 20. DQS has to retain a low level during tDQSCKE period, as well as DQS# has to retain a high level.
- 21. If tCACD is violated, the data for samples which violate tCACD will not be available, except for the last sample (where tCACD after this sample is met). Valid data for the last sample will be available after tADR.
- 22. Exit Command Bus Training Mode to next valid command delay Time depends on value of VREF(CA) setting: MR12 OP[5:0] and VREF(CA) Range: MR12 OP[6] of FSP-OP 0 and 1. Additionally exit Command Bus Training Mode to next valid command delay Time may affect VREF(DQ) setting. Settling time of VREF(DQ) level is same as VREF(CA) level.
- $23. \, Start \, DQS \, \, OSC \, command \, is \, prohibited \, until \, tOSCO(Min) \, is \, satisfied.$



# Single Ended Output Slew Rate

Figure 46. Single Ended Output Slew Rate Definition

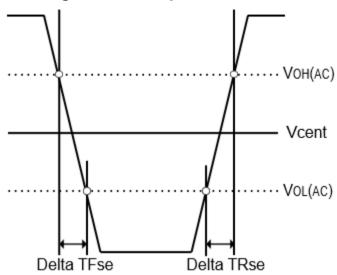


Table 83. Output Slew Rate (Single-ended)

Comple ed	Bouwardon	Value		11
Symbol	Parameter	Min. <sup>1</sup>	Max. <sup>2</sup>	Unit
SRQse	Single-ended Output Slew Rate (V <sub>OH</sub> = V <sub>DDQ</sub> /3)	3.5	9	V/ns
-	Output slew-rate matching Ratio (Rise to Fall)	0.8	1.2	-

#### Notes:

1. Description:

SR: Slew

Rate

Q: Query Output (like in DQ, which stands for Data-in, Query-Output) se: Single-ended Signals


- se: Single-ended Signals

  2. Measured with output reference load.
- 3. The ratio of pull-up to pull-down slew rate is specified for the same temperature and voltage, over the entire temperature and voltage range. For a given output, it represents the maximum difference between pull-up and pull-down drivers due to process variation.
- 4. The output slew rate for falling and rising edges is defined and measured between  $V_{OL(AC)} = 0.2 \text{ x } V_{OH(DC)}$  and  $V_{OH(AC)} = 0.8 \text{ x } V_{OH(DC)}$ .
- 5. Slew rates are measured under average SSO conditions, with 50% of DQ signals per data byte switching.



# **Differential Output Slew Rate**

Figure 47. Differential Output Slew Rate Definition

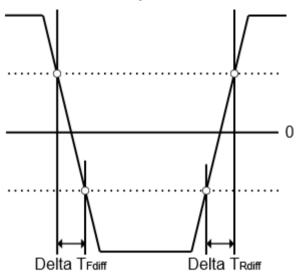

**Table 84. Differential Output Slew Rate** 

Symbol	Value Parameter		Unit		
Symbol	Faranietei	Min.	Max.	Unit	
SRQdiff	Differential Output Slew Rate (V <sub>OH</sub> = V <sub>DDQ</sub> /3)	7	18	V/ns	

#### Notes:

1. Description:

SR: Slew

Rate

Q: Query Output (like in DQ, which stands for Data-in, Query-Output) diff: Differential Signals

- 2. Measured with output reference load.
- 3. The output slew rate for falling and rising edges is defined and measured between  $V_{OL(AC)} = -0.8 \text{ x } V_{OH(DC)}$  and  $V_{OH(AC)} = 0.8 \text{ x } V_{OH(DC)}$ .
- 4. Slew rates are measured under average SSO conditions, with 50% of DQ signals per data byte switching.



# **AC and DC Input/Output Measurement Levels**

# 1.1 V High speed LVCMOS (HS LLVCMOS)

Standard specifications: All voltages are referenced to ground except where noted.


#### DC electrical characteristics

Table 85, Input Level for CKE

Cumbal	Parameter	Value			Note
Symbol		Min.	Max.	Unit	Note
VIH(AC)	Input high level (AC)	0.75 x V <sub>DD2</sub>	V <sub>DD2</sub> + 0.2	V	1
VIL(AC)	Input low level (AC)	-0.2	0.25 x V <sub>DD2</sub>	V	1
VIH(DC)	Input high level (DC)	0.65 x V <sub>DD2</sub>	V <sub>DD2</sub> + 0.2	V	
VIL(DC)	Input low level (DC)	-0.2	0.35 x V <sub>DD2</sub>	V	

#### Notes:

Figure 48. Input AC timing definition for CKE

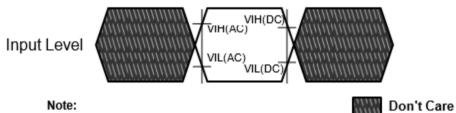

#### Note:

- 1. AC level is guaranteed transition point.
- 2. DC level is hysteresis.




<sup>1.</sup> Refer AC Overshoot and Undershoot.

Table 86. Input Level for Reset# and ODT\_CA

Symbol	Parameter	Value			Note
Syllibol		Min.	Max.	Unit	Note
VIH	Input high level	0.8 x V <sub>DD2</sub>	V <sub>DD2</sub> + 0.2	V	1
VIL	Input low level	-0.2	0.2 x V <sub>DD2</sub>	V	1

#### Notes:

Figure 49. Input AC timing definition for Reset# and ODT\_CA

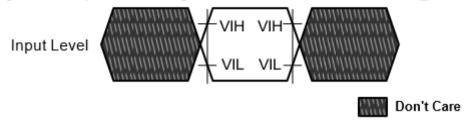



<sup>1.</sup> Refer AC Overshoot and Undershoot.

# **Differential Input Voltage**

# **Differential Input Voltage for CK**

The minimum input voltage need to satisfy both Vindiff\_CK and Vindiff\_CK/2 specification at input receiver and their measurement period is 1tCK. Vindiff\_CK is the peak to peak voltage centered on 0 volts differential and Vindiff\_CK/2 is max and min peak voltage from 0V.

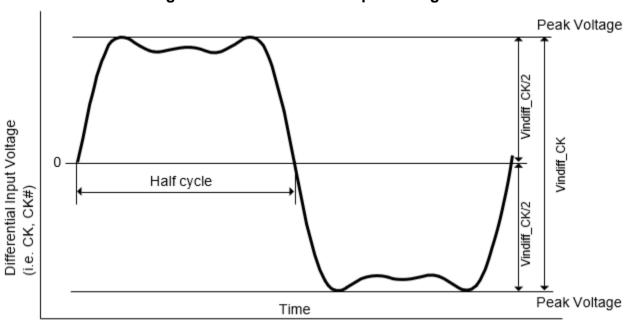


Figure 50. CK Differential Input Voltage

Table 87, CK Differential Input Voltage

Symbol	Parameter	3733		Unit	Note
Syllibol		Min.	Max.	Unit	Note
Vindiff_CK	CK differential input voltage	360	-	mV	1

#### Notes:


The peak voltage of Differential CK signals is calculated in a following equation.
 Vindiff\_CK = (Max Peak Voltage) - (Min Peak Voltage)
 Max Peak Voltage = Max(f(t))
 Min Peak Voltage = Min(f(t))
 f(t) = VCK - VCK#



# Peak voltage calculation method

The peak voltage of Differential Clock signals are calculated in the following equation. VIH.DIFF.Peak Voltage = Max(f(t)) VIL.DIFF.Peak Voltage = Min(f(t)) f(t) = Min(f(t)) VCK - Min(

Figure 51. Definition of differential Clock Peak Voltage

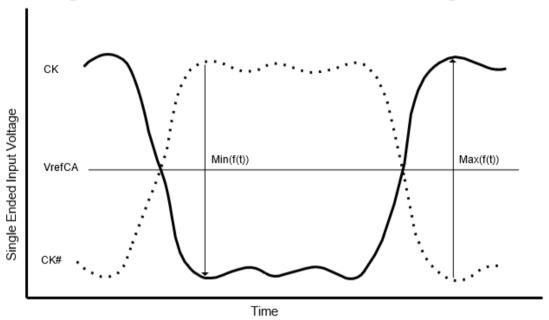

NOTES: 1. VREFCA is LPDDR4 SDRAM internal setting value by VREF Training.



# Single-Ended Input Voltage for Clock

The minimum input voltage needs to satisfy both Vinse\_CK, Vinse\_CK\_High/Low specification at input receiver.

CK#

Vinse\_CK\_High

Vinse\_CK\_High

Vinse\_CK\_High

Vinse\_CK\_High

Figure 52. Clock Single-Ended Input Voltage

NOTES: 1. VREFCA is LPDDR4 SDRAM internal setting value by VREF Training

Table 83. Clock Single-Ended Input Voltage


Symbol	Parameter	Parameter 3733		Unit
Symbol	Farameter	Min.	Max.	Ullit
Vinse_CK	Clock Single-Ended input voltage	180	-	mV
Vinse_CK_High	Clock Single-Ended input voltage High from V <sub>REFDQ</sub>	90	-	mV
Vinse_CK_Low	Clock Single-Ended input voltage High from V <sub>REFDQ</sub>	90	-	mV



# **Differential Input Slew Rate Definition for Clock**

Input slew rate for differential signals (CK, CK#) are defined and measured as shown below in figure and the tables.

Figure 53. Differential Input Slew Rate Definition for CK, CK#

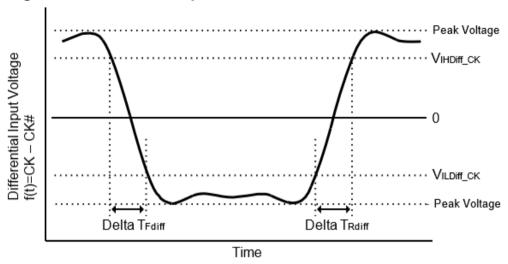

NOTE 1. Differential signal rising edge from VILDiff\_CK to VIHDiff\_CK must be monotonic slope. NOTE 2. Differential signal falling edge from VIHDiff\_CK to VILDiff\_CK must be monotonic slope.

Table 83. Differential Input Slew Rate Definition for CK, CK#

Description	From	То	Defined by
Differential input slew rate for rising edge (CK – CK#)	VILdiff_CK	VIHdiff_CK	VILdiff_CK - VIHdiff_CK /DeltaTRdiff
Differential input slew rate for falling edge (CK – CK#)	VIHdiff_CK	VILdiff_CK	VILdiff_CK - VIHdiff_CK /DeltaTFdiff

Table 83. Differential Input Level for CK, CK#

Symbol Parameter	37	Unit		
Symbol	Symbol	Min.	Max.	Oill
VIHdiff_CK	Differential Input High	145	-	mV
VILdiff_CK	Differential Input Low	-	-145	mV

Table 84. Differential Input Slew Rate Definition for CK, CK#

Symbol Parameter	Parameter	37	33	Unit	
	Faianetei	Min.	Max.	Onit	
SRIdiff_C	K	Differential Input Slew Rate for Clock	2	14	V/ns



### **Differential Input Cross Point Voltage**

The cross point voltage of differential input signals (CK, CK#) must meet the requirements in table below. The differential input cross point voltage VIX is measured from the actual cross point of true and complement signals to the mid level that is VREF(CA).

 $V_{DD}$ Single Ended Input Voltage CK Max(f(t)  $V_{IX\_CK,FR}$  $V_{IX\_CK,RF}$ V<sub>IX\_CK,FR</sub>  $V_{IX}$  ck,rf Min(f(t) CK#  $V_{SS}$ 

Figure 54. Vix Definition (Clock)

NOTES:

Table 85, Cross point voltage for differential input signals (Clock)

Symbol	nbol Parameter	37	Unit	Note	
Symbol		Min.	Max.	Offic	Note
Vix_CK_ratio	Clock Differential input cross point voltage ratio	1	25	%	1,2

- 1. Vix CK Ratio is defined by this equation: Vix CK Ratio = Vix CK FR/|Min(f(t))|
- 2. Vix\_CK\_Ratio is defined by this equation: Vix\_CK\_Ratio = Vix\_CK\_RF/Max(f(t))



Time The base level of Vix\_CK\_FR/RF is VREFCA that is LPDDR4 SDRAM internal setting value by VREF Training.

# **Differential Input Voltage for DQS**

The minimum input voltage need to satisfy both Vindiff\_DQS and Vindiff\_DQS/2 specification at input receiver and their measurement period is 1UI (tCK/2). Vindiff\_DQS is the peak to peak voltage centered on 0 volts differential and Vindiff\_DQS/2 is max and min peak voltage from 0V.

Figure 55. DQS Differential Input Voltage

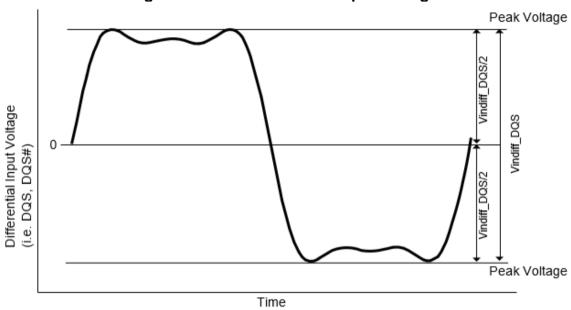


Table 86. DQS Differential Input Voltage

Symbol Parameter	37	Unit	Note		
	Faranteter	Min.	Max.	Offic	Note
Vindiff_DQS	DQS differential input	340	-	mV	1

#### Notes:

1. The peak voltage of Differential DQS signals is calculated in a following equation.
Vindiff\_DQS = (Max Peak Voltage) - (Min Peak Voltage)
Max Peak Voltage = Max(f(t))
Min Peak Voltage = Min(f(t))
f(t) = VDQS - VDQS#



# Peak voltage calculation method

The peak voltage of Differential DQS signals are calculated in a following equation. VIH.DIFF.Peak Voltage = Max(f(t)) VIL.DIFF.Peak Voltage = Min(f(t)) f(t) = VDQS - VDQS#

Figure 56. Definition of differential DQS Peak Voltage

DQS

VrefDQ

Min(f(t))

DQS#

DQS#

DQS#

Time

NOTES: 1. VrefDQ is LPDDR4 SDRAM internal setting value by Vref Training.



# Single-Ended Input Voltage for DQS

The minimum input voltage need to satisfy both Vinse\_DQS, Vinse\_DQS\_High/Low specification at input receiver.

Single Ended Input Voltage

Ninse\_DQS

Ninse\_DQS\_Low
Vinse\_DQS\_Low
Vinse

Figure 57. DQS Single-Ended Input Voltage

NOTES: 1. VrefDQ is LPDDR4 SDRAM internal setting value by Vref Training.

Table 83. DQS Single-Ended Input Voltage


Symbol	Parameter	37	Unit	
Symbol	Faiametei	Min.	Max.	Oilit
Vinse_DQS	DQS Single-Ended input voltage	170	-	mV
Vinse_DQS_High	DQS Single-Ended input voltage High from VREFDQ	85	-	mV
Vinse_DQS_Low	DQS Single-Ended input voltage Low from VREFDQ	85	-	mV



# **Differential Input Slew Rate Definition for DQS**

Input slew rate for differential signals (DQS, DQS#) are defined and measured as shown below in figure and the tables.

Figure 58. Differential Input Slew Rate Definition for DQS, DQS#

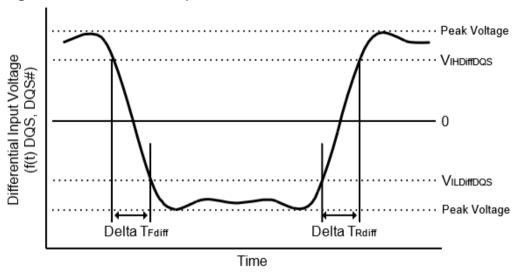

NOTE 1. Differential signal rising edge from VILDiff\_DQS to VIHDiff\_DQS must be monotonic slope. NOTE 2. Differential signal falling edge from VIHDiff\_DQS to VILDiff\_DQS must be monotonic slope.

Table 84. Differential Input Slew Rate Definition for DQS, DQS#

Description	From	То	Defined by
Differential input slew rate for rising edge (DQS – DQS#)	VILdiff_DQS	VIHdiff_DQS	VILdiff_DQS - VIHdiff_DQS /DeltaTRdiff
Differential input slew rate for falling edge (DQS – DQS#)	VIHdiff_DQS	VILdiff_DQS	VILdiff_DQS - VIHdiff_DQS /DeltaTFdiff

Table 85. Differential Input Level for DQS, DQS#

			•		
Symbol Parameter	3733		Unit	Ī	
Symbol	Parameter	Min.	Max.	Offic	
VIHdiff_DQS	Differential Input High	120	-	mV	
VILdiff_DQS	Differential Input Low	-	-120	mV	Ī

Table 86. Differential Input Slew Rate Definition for DQS, DQS#

Symbol Parameter -	37	Unit		
	Parameter	Min.	Max.	Unit
SRIdiff	Differential Input Slew Rate	2	14	V/ns



# **Differential Input Cross Point Voltage**

The cross point voltage of differential input signals (DQS, DQS#) must meet the requirements in table below. The differential input cross point voltage VIX is measured from the actual cross point of true and complement signals to the mid level that is VREFDQ.

 $V_{DDQ}$ Single Ended Input Voltage DQS Max(f(t)  $V_{IX\_DQS,FF}$  $V_{IX\_DQS,RF}$  $V_{IX\_DQS,FR}$ X DQS.RF Min(f(t)) DQS#  $V_{SSQ}$ 

Figure 59. Vix Definition (DQS)

NOTES:

1. The base level of Vix\_DQS\_FR/RF is VrefDQ that is LPDDR4 SDRAM internal setting value by Vref Training.

Time

Table 87. Cross point voltage for differential input signals (DQS)

Symbol Parameter		3733		Unit	Note
Symbol	Parameter	Min.	Max.	Unit	Note
Vix_DQS_ratio	DQS Differential input cross point voltage ratio	-	20	%	1,2

#### Notes:

- 1. Vix\_DQS\_Ratio is defined by this equation: Vix\_DQS\_Ratio = Vix\_DQS\_FR/|Min(f(t))|
- 2. Vix\_DQS\_Ratio is defined by this equation: Vix\_DQS\_Ratio = Vix\_DQS\_RF/Max(f(t))

# Input Level for ODT Input

Table 88. Input Level for ODT(CA)

Cumbal	Symbol Parameter	Value		
Symbol		Min.	Max.	Unit
VIHODT	ODT Input high level	$0.75 \times V_{DD2}$	V <sub>DD2</sub> + 0.2	V
VILODT	ODT Input low level	-0.2	0.25 x V <sub>DD2</sub>	٧



# **Overshoot and Undershoot Specifications**

Table 83. AC Overshoot/Undershoot

Parameter	3733	Unit
Maximum peak Amplitude allowed for overshoot area	0.3	V
Maximum peak Amplitude allowed for undershoot area	03	V
Maximum overshoot area above VDD/VDDQ	0.1	V-ns
Maximum undershoot area below VSS/VSSQ	0.1	V-ns

#### Notes:

- VDD stands for VDD2 for CA[5:0], CK, CK#, CS, CKE and ODT. VDD stands for VDDQ for DQ, DMI, DQS and DQS#.
   VSS stands for VSS for CA[5:0], CK, CK#, CS, CKE and ODT. VSS stands for VSSQ for DQ, DMI, DQS and DQS#.
- 3. Maximum peak amplitude values are referenced from actual VDD and VSS values.
- 4. Maximum area values are referenced from maximum operating VDD and VSS values.

Figure 60. Overshoot and Undershoot Definition

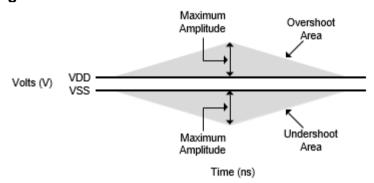


Table 83. Overshoot/Undershoot for CKE and RESET


1 4.00 1 4 1 1		
Parameter	Value	Unit
Maximum peak Amplitude allowed for overshoot area	0.35	V
Maximum peak Amplitude allowed for undershoot area	035	V
Maximum overshoot area above VDD	0.8	V-ns
Maximum undershoot area below VSS	0.8	V-ns



# **Driver Output Timing Reference Load**

These 'Timing Reference Loads' are not intended as a precise representation of any particular system environment or a depiction of the actual load presented by a production tester. System designers should use IBIS or other simulation tools to correlate the timing reference load to a system environment. Manufacturers correlate to their production test conditions, generally one or more coaxial transmission lines terminated at the tester electronics.


Figure 61. Driver Output Reference Load for Timing and Slew Rate



#### Note:

# LVSTL (Low Voltage Swing Terminated Logic) IO System

LVSTL I/O cell is comprised of pull-up, pull-down driver and a terminator.

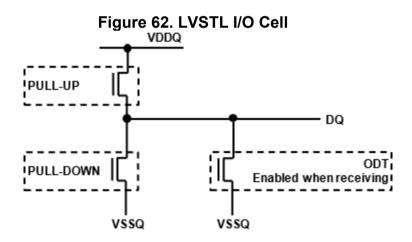




All output timing parameter values are reported with respect to this reference load.
 This reference load is also used to report slew rate.

To ensure that the target impedance is achieved, calibrate the LVSTL I/O cell as following example:


- 1. First calibrate the pull-down device against a 240  $\Omega$  resister to VDDQ via the ZQ pin.
  - · Set Strength Control to minimum setting.
  - Increase drive strength until comparator detects data bit is less than VDDQ/2.
  - NMOS pull-down device is calibrated to 240  $\Omega$

Figure 63. Pull-down calibration

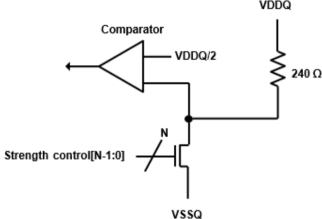

- 2. Then calibrate the pull-up device against the calibrated pull-down device.
  - · Set VOH target and NMOS controller ODT replica via MRS VOH can be automatically controlled by ODT MRS).
  - Set Strength Control to minimum setting.
  - · Increase drive strength until comparator detects data bit is greater than VOH target.
  - NMOS pull-up device is now calibrated to VOH target.


Figure 64. Pull-up calibration

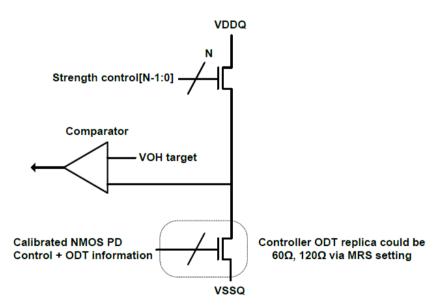

# **CA Rx Voltage and Timing**

The command and address (CA) including CS input receiver compliance mask for voltage and timing is shown in the CA Receiver (Rx) Mask figure below. All CA, CS signals apply the same compliance mask and operate in single data rate mode.

The CA input Rx mask for voltage and timing is applied across all pins, as shown in the figure below. The receiver mask (Rx Mask) defines the area that the input signal must not encroach in order for the DRAM input receiver to be expected to be able to successfully capture a valid input signal; it is not the valid data-eye.

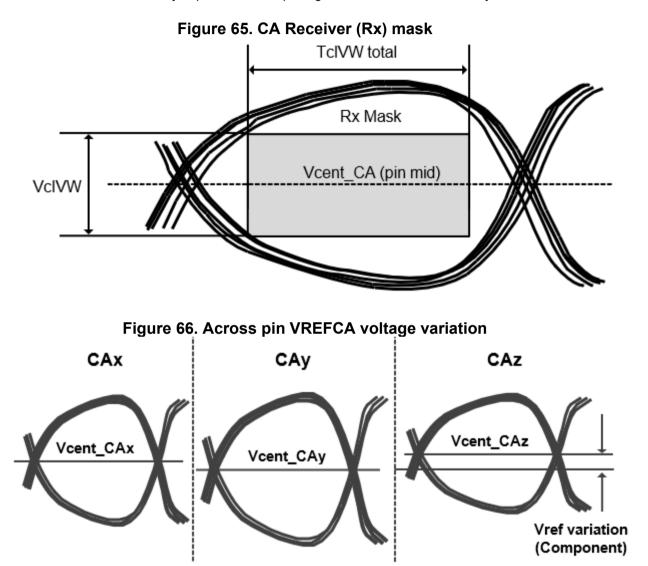

Vcent\_CA(pin mid) is defined as the midpoint between the largest Vcent\_CA voltage level and the smallest Vcent\_CA voltage level across all CA and CS pins for a given DRAM component. Each CA Vcent level is defined by the center, i.e., widest opening, of the cumulative data input eye as depicted in the figure above. This clarifies that any DRAM component level variation must be accounted for within the DRAM CA Rx mask. The component level VREF will be set by the system to account for Ron and ODT settings.

Figure 67. CA Timings at the DRAM Pins

CK, CK# Data-in at DRAM Pin Minimum CA eye center aligned

CK#

CK


Rx Mask DRAM Pin

TcIVW

TcIVW for all CA signals is defined as centered on The CK/CK# crossing at the DRAM pin.

All of the timing terms in above figure are measured from the CK/CK# to the center (midpoint) of the TcIVW window taken at the VcIVW\_total voltage levels centered around Vcent\_CA(pin mid).

Figure 68. CA TcIPW and SRIN\_cIVW definition (for each input pulse)

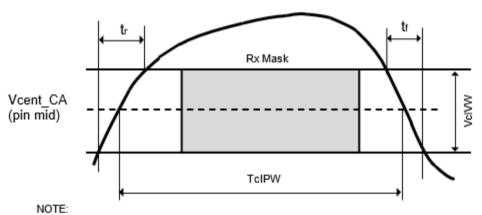

SRIN\_cIVW=VcIVW\_Total/(tr or tf), signal must be monotonic within tr and tf range.

Vcent\_CA

Rx Mask

Rx Mask

Rx Mask

VcelVW

VIHL\_AC(min)/2

Figure 69. CA VIHL\_AC definition (for each input pulse)

# Table 84. DRAM CMD/ADR, CS

Symbol	Parameter	3733			Note
		Min.	Max.	Unit	Note
VcIVW	Rx Mask voltage - p-p	-	155	mV	1,2,4
TcIVW	Rx timing window	-	0.3	UI	1-4
VIHL_AC	CA AC input pulse amplitude pk-pk	190	-	mV	5,8
TcIPW	CA input pulse width	0.6	-	UI	6
SRIN_cIVW	Input Slew Rate over VcIVW	1	7	V/ns	7

#### Notes:

- 1. CA Rx mask voltage and timing parameters at the pin including voltage and temperature drift.
- 2. Rx mask voltage VcIVW total(max) must be centered around Vcent\_CA(pin mid).
- 3. Rx differential CA to CK jitter total timing window at the VcIVW voltage levels.
- 4. Defined over the CA internal Vref range. The Rx mask at the pin must be within the internal Vref CA range irrespective of the input signal common mode.
- 5. CA only input pulse signal amplitude into the receiver must meet or exceed VIHL AC at any point over the total UI. No timing requirement above level. VIHL AC is the peak to peak voltage centered around Vcent\_CA(pin mid) such that VIHL\_AC/2 min must be met both above and below Vcent\_CA.
- 6. CA only minimum input pulse width defined at the Vcent CA(pin mid).
- 7. Input slew rate over VcIVW Mask centered at Vcent\_CA(pin mid).
- 8. VIHL\_AC does not have to be met when no transitions are occurring.
- 9. UI=tck(avg)min



# **DRAM Data Timing**

Figure 70. Read data timing definitions tQH and tDQSQ across all DQ signals per DQS group


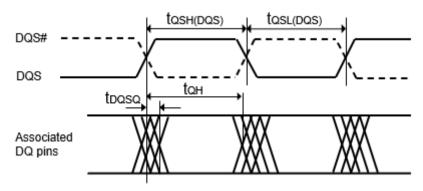


Figure 71. Read Data Timing tQW Valid Window Defined per DQ Signal

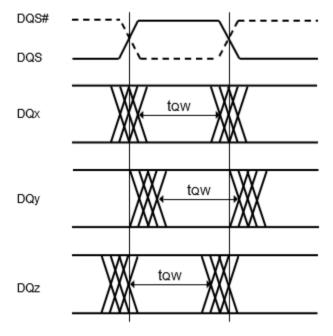

# **DQ Rx Voltage and Timing**

The DQ input receiver mask for voltage and timing is applied per pin, as shown in the figure below. The "total" mask (VdIVW\_total, TdiVW\_total) defines the area the input signal must not encroach in order for the DQ input receiver to successfully capture an input signal with a BER of lower than tbd. The mask is a receiver property and it is not the valid data-eye.


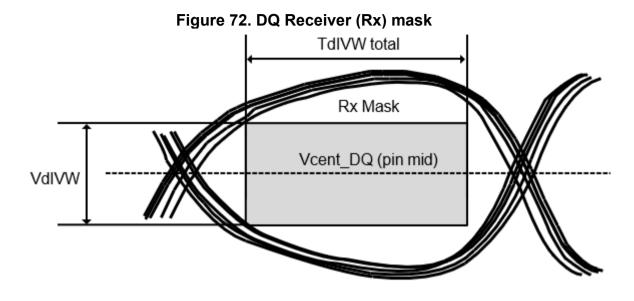



Figure 73. Across Pin Vref DQ Voltage Variation

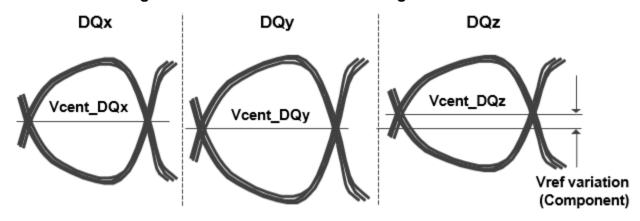


Vcent\_DQ(pin\_mid) is defined as the midpoint between the largest Vcent\_DQ voltage level and the smallest Vcent\_DQ voltage level across all DQ pins for a given DRAM component. Each DQ Vcent is defined by the center, i.e., widest opening, of the cumulative data input eye as depicted in the figure above. This clarifies that any DRAM component level variation must be accounted for within the DRAM Rx mask. The component level VREF will be set by the system to account for Ron and ODT settings.



Figure 74. DQ to DQS tDQS2DQ and tDQ2DQ Timings at the DRAM pins referenced from the internal latch

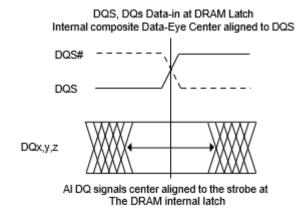


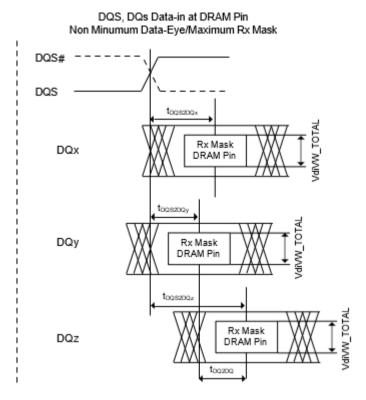

#### NOTE:

- 1. The tDQS2DQ is measured at the center(midpoint) of the TdiVW window.
- 2. The DQz represents the max tDQS2DQ in this example.
- 3. DQy represents the min tDQS2DQ in this example.

Figure 75. DQ TdIPW and SRIN\_dIVW definition (for each input pulse)

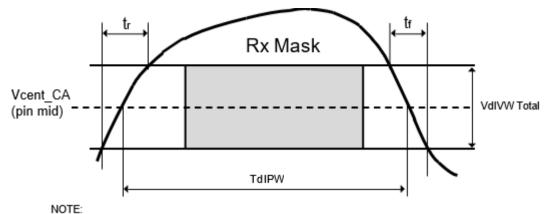

SRIN\_dIVW=VdIVW\_Total/(tr or tf), signal must be monotonic within tr and tf range.

Figure 76. DQ VIHL\_AC definition (for each input pulse)

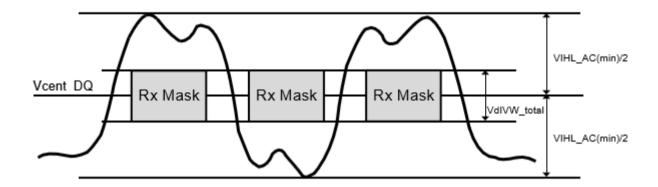


Table 83. DRAM DQs In Receive Mode (Unit UI = tCK(avg)min/2)


Symbol	Powerster	3.	l lmi4	Nete	
	Parameter	Min.	Max.	Unit	Note
VdIVW_total	Rx Mask voltage - p-p total	-	140	mV	1-4
TdlVW_total	Rx timing window total (At VdIVW voltage levels)	-	0.25	UI	1,2,4
TdlVW_1bit	Rx timing window 1 bit toggle (At VdIVW voltage levels)	-	TBD	UI	1,2,4,12
VIHL_AC	DQ AC input pulse amplitude pk-pk	180	-	mV	5,13
TdIPW DQ	Input pulse width (At Vcent_DQ)	0.45	-	UI	6
tDQS2DQ	DQ to DQS offset	200	800	ps	7
tDQ2DQ	DQ to DQ offset	-	30	ps	8
tDQS2DQ_temp	DQ to DQS offset temperature variation	-	0.6	ps/°C	9
tDQS2DQ_volt	DQ to DQS offset voltage variation	-	33	ps/ 50mV	10
SRIN_dIVW	Input Slew Rate over VdlVWJotal	1	7	V/ns	11
tDQS2DQ_ rank2rank	DQ to DQS offset rank to rank variation	-	200	ps	14,15

#### Notes:

- Data Rx mask voltage and timing parameters are applied per pin and includes the DRAM DQ to DQS voltage AC noise impact
  for frequencies >20 MHz and max voltage of 45mv pk-pk from DC-20MHz at a fixed temperature on the package. The voltage
  supply noise must comply to the component Min-Max DC operating conditions.
- 2. The design specification is a BER <TBD. The BER will be characterized and extrapolated if necessary using a dual dirac method.
- 3. Rx mask voltage VdIVW total(max) must be centered around Vcent DQ(pin mid).
- 4. Vcent DQ must be within the adjustment range of the DQ internal Vref.
- 5. DQ only input pulse amplitude into the receiver must meet or exceed VIHL AC at any point over the total UI. No timing requirement above level. VIHL AC is the peak to peak voltage centered around Vcent\_DQ(pin\_mid) such that VIHL\_AC/2 min must be met both above and below Vcent\_DQ.
- 6. DQ only minimum input pulse width defined at the Vcent DQ(pin mid).
- 7. DQ to DQS offset is within byte from DRAM pin to DRAM internal latch. Includes all DRAM process, voltage and temperature variation.
- 8. DQ to DQ offset defined within byte from DRAM pin to DRAM internal latch for a given component.
- 9. TDQS2DQ max delay variation as a function of temperature.
- 10.TDQS2DQ max delay variation as a function of the DC voltage variation for VDDQ and VDD2. It includes the VDDQ and VDD2 AC noise impact for frequencies > 20MHz and max voltage of 45mv pk-pk from DC-20MHz at a fixed temperature on the package. For tester measurement VDDQ = VDD2 is assumed.
- 11. Input slew rate over VdIVW Mask centered at Vcent DQ(pin mid).
- 12. Rx mask defined for a one pin toggling with other DQ signals in a steady state.
- 13. IHL\_AC does not have to be met when no transitions are occurring.
- 14. The same voltage and temperature are applied to tDQS2DQ\_rank2rank.
- 15. tDQS2DQ\_rank2rank parameter is applied to multi-ranks per byte lane within a package consisting of the same design dies.



# 200-Ball FBGA Package 10x14.5x0.8mm (max) Outline Drawing Information

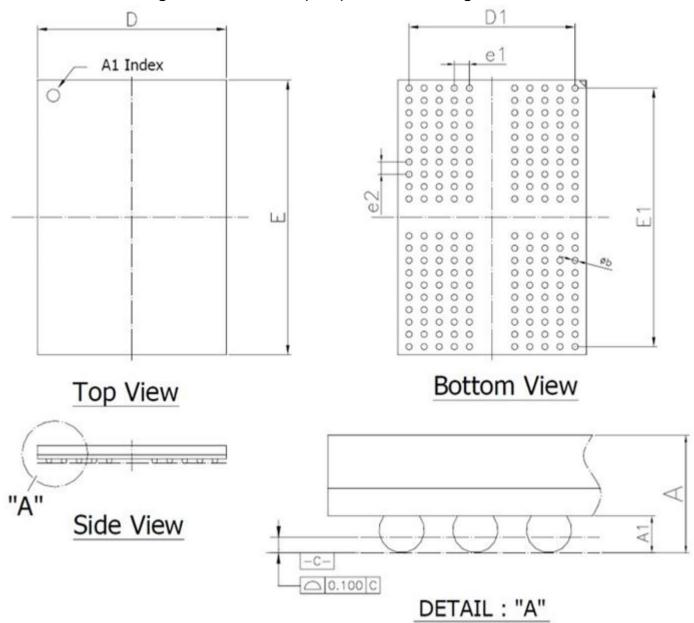

Symbol	Dimension in inch		Dimension in mm			
	Min	Nom	Max	Min	Nom	Max
Α			0.0315			0.80
A1	0.0067		0.0110	0.17		0.28
D	0.3898	0.3937	0.3976	9.90	10.00	10.10
E	0.5669	0.5709	0.5748	14.40	14.50	14.60
D1		0.3465			8.80	
E1		0.5374			13.65	
e1		0.0315			0.80	
e2		0.0256			0.65	
b	0.0106	0.0126	0.0146	0.27	0.32	0.37